



M+S HYDRAULIC

HYDRAULIC MOTORS

**MLHS
MLHT
MLHV**



SAE version

DISC VALVE HYDRAULIC MOTORS

CONTENTS

	Page
• Hydraulic Motors Series MLHS	4
• Hydraulic Motors Series MLHT	25
• Hydraulic Motors Series MLHV	39
• Hydraulic Motors Series MLHHW	52
• Motor Special Features.....	58
• Motors with Speed Sensor.....	59
• Application Calculation	61

DISC VALVE HYDRAULIC MOTORS

GENERAL INFORMATION:

Orbit motors convert hydraulic energy (pressure, oil flow) into mechanical energy (torque, speed). Hydraulic orbit motors operate on the principle of an internal gear (rotor) rotating within a fixed external gear (stator). The internal gear transmits the torque generated by the application of pressure from hydraulic oil fed into motor which is then delivered via the motor's output shaft. Orbit motors have high starting torque and constant output torque at wide speed range. The output shaft runs on tapered roller bearings and can absorb high axial and radial forces.

DISTRIBUTOR VALVE

MLHS, MLHT, MLHV series motors has disk valve: the distributor valve has been separated from output shaft and is driven by short cardan shaft. A balance plate counterbalances the hydraulic forces around the distributor valve. It gives the motors high efficiency- even at high pressures, and good starting characteristics.

GEAR WHEEL SET

There are two forms of gear wheel set: Gerotor set have plain teeth and Roll-gerotor set with teeth fitted with rollers.

MLHS, MLHT, MLHV series motors have roll-gerotor set. The rollers reduce local stress and the tangential reaction forces on the rotor reducing friction to a minimum. This gives long operating life and better efficiency even at continuous high pressures.

FEATURES:

Standard Motor

The standard motor mounting flange is located as close to the output shaft as possible. This type of mounting supports the motor close to the shaft load. This mounting flange is also compatible with many standard gear boxes.

Wheel Motor

The wheel motor mounting flange is located near the center of the motor which permits part or all of the motor to be located inside the wheel or roller hub. In traction drive applications, loads can be positioned over the motor bearings for best bearing life. This wheel motor mounting flange provides design flexibility in many applications.

Short Motor

This motor is assembled without the output shaft, bearings and bearing housing and has the same drive components as the standard motors. The short motor is especially suited for applications such as gear boxes, winch, reel and roll drives. Short motor applications must be designed with a bearing supported internal spline to mate with the short motor drive. Product designs using these hydraulic motors provide considerable cost savings.

Low Leakage

LL Series hydraulic motors are designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation), but with considerable decreased volumetric losses in the drain ports. This motors are suitable for hydraulic systems with series-connected motors with demands for low leakage.

Low Speed Valve

LSV feature optimizes the motor for low-speed performance. Motors with this valving provide very low speed while maintaining high torque. They are designed to run continuously at low speed (up to 200 RPM) at normal pressure drop and reduced flow. Optimal run is guaranteed at frequency of rotation from 20 to 50 RPM. Motors with this valving have an increased starting pressure and are not recommended for using at pressure drop less than 580 PSI [40 bar].

High Pressure Shaft Seal

The high pressure shaft seals allow the motors to withstand high case pressures at high speeds without external drain line.

Motors with Speed Sensor



Motors are available with integrated inductive speed sensor. The output signal is a standardized voltage signal that can be used to control the speed of a motor. The torque and the radial load of the motor are not affected by the installation of speed sensor.

HYDRAULIC MOTORS MLHS



APPLICATION

- » Conveyors
- » Metal working machines
- » Agricultural machines
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles etc.



CONTENTS

Specification data	5÷6
Performance data	7÷12
Permissible shaft seal pressure.....	12
Dimensions and mounting	13÷15
Dimensions and mounting - ports	16
Tacho connection	16
Motor with Drum brake- MLHSBD	17
Shaft extensions	18
Permissible shaft loads	19
Function diagram for MLHSBD.....	19
Dimensions and mounting- MLHSS, Z, V, U... 20÷21	
Dimensions of the attached component	22÷23
Internal Spline data	24
Order code	24

OPTIONS

- » Model - Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Motor with Drum Brake
- » Tacho connection
- » Speed sensoring
- » Side and rear ports
- » Shafts- straight, splined and tapered
- » SAE, Metric and BSPP ports
- » Other special features


GENERAL

Max. Displacement,	in ³ /rev [cm ³ /rev]	34.47 [564,9]
Max. Speed,	RPM	1000
Max. Torque,	lb-in [daNm]	cont.: 7520 [85] int.: 8760 [99]
Max. Output,	HP [kW]	30.8 [23]
Max. Pressure Drop,	PSI [bar]	cont.: 3050 [210] int.: 3990 [275]
Max. Oil Flow,	GPM [lpm]	24 [90]
Min. Speed,	RPM	5
Permissible Shaft Loads,	Ibs [daN]	P _a =1125 [500]
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	°F [°C]	-40÷284 [-40÷140]
Optimal Viscosity range,	SUS [mm ² /s]	98÷347 [20÷75]
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm ² /s]	Oil flow in drain line GPM [lpm]
2030 [140]	98 [20]	.396 [1,5]
	164 [35]	.264 [1]
3045 [210]	98 [20]	.793 [3]
	164 [35]	.528 [2]

Pressure Losses

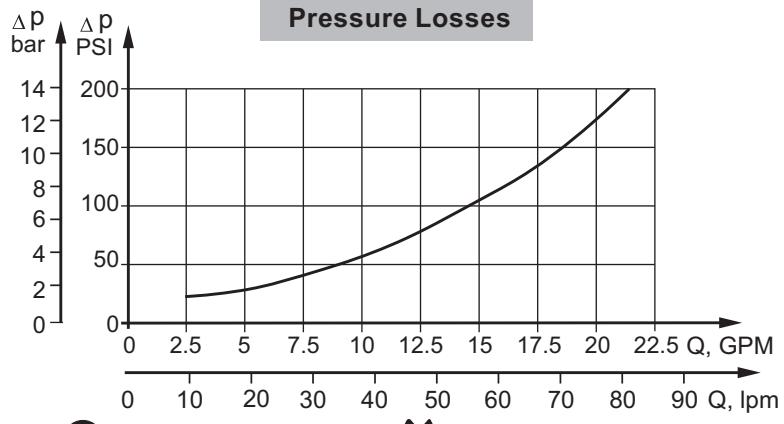

SPECIFICATION DATA

Type	MLHS 80	MLHS 100	MLHS 125	MLHS 160	MLHS 200
Displacement, in³/rev [cm³/rev]	4.91 [80,5]	6.1 [100]	7.67 [125,7]	9.74 [159,7]	12.2 [200]
Max. Speed, [RPM]	cont. Int.*	810 1000	750 900	600 720	470 560
Max. Torque Ib-in [daNm]	cont. Int.*	2120 [24] 2740 [31]	2700 [30,5] 3450 [39]	3320 [37,5] 4340 [49]	4340 [49] 5310 [60]
Max. Output HP [kW]	cont. int.*	20.8 [15,5] 26.2 [19,5]	24.1 [18] 30.2 [22,8]	24.1 [18] 30.2 [22,5]	22.1 [16,5] 30.8 [23]
Max. Pressure Drop PSI [bar]	cont. Int.* peak**	3050 [210] 3990 [275] 4280 [295]			
Max. Oil Flow GPM [lpm]	cont. Int.*	17 [65] 21 [80]	20 [75] 24 [90]	20 [75] 24 [90]	20 [75] 24 [90]
Max. Inlet Pressure PSI [bar]	cont. Int.* peak**	3340 [230] 4280 [295] 4350 [300]			
Max. Return Pressure with Drain Line PSI [bar]	cont. Int.* peak**	2030 [140] 2540 [175] 3050 [210]			
Max. Starting Pressure with Unloaded Shaft, PSI [bar]	175 [12]	145 [10]	145 [10]	115 [8]	115 [8]
Min. Starting Torque Ib-in [daNm]	at max. press. drop cont. at max. press. drop Int.*	1590 [18] 2080 [23,5]	2040 [23] 2660 [30]	2570 [29] 3360 [38]	3270 [37] 4070 [46]
Min. Speed***, [RPM]		10	10	8	8
Weight, lb [kg]	MLHS(F)	21.8 [9,9]	22.2 [10,1]	22.9 [10,4]	23.8 [10,8]
For Rear Ports + .88[0,40]	MLHSB	22.9 [10,4]	23.3 [10,6]	24 [10,9]	24.6 [11,3]
	MLHSS(Z)	17.4 [7,9]	17.8 [8,1]	18.5 [8,4]	19.4 [8,8]
	MLHSV	12.8 [5,8]	13.2 [6]	13.9 [6,3]	14.8 [6,7]
	MLHSW(E)	22.7 [10,3]	23.2 [10,5]	23.8 [10,8]	24.7 [11,2]
	MLHSBD	37.3 [16,9]	37.7 [17,1]	38.3 [17,4]	41.1 [18,2]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA (continued)

Type	MLHS 250	MLHS 315	MLHS 400	MLHS 475	MLHS 525	MLHS 565
Displacement, in³/rev [cm³/rev]	15.3 [250]	19.2 [314,9]	24.2 [397]	28.96[474,6]	31.88 [522,7]	34.47[564,9]
Max. Speed, [RPM]	cont. Int.*	300 360	240 290	190 230	160 190	145 175
Max. Torque lb-in [daNm]	cont. Int.*	6370 [72]	7300 [82,5]	7660 [86,5]	7520 [85]	7520 [85]
Max. Output HP [kW]	cont. int.*	19.4 [14,5]	20.1 [15]	14.8 [11]	11 [8,4]	10.2 [7,6]
Max. Pressure Drop PSI [bar]	cont. Int.* peak**	2900 [200] 3630 [250] 3920 [270]	2900 [200] 3480 [240] 3770 [260]	2320 [160] 2760 [190] 3050 [210]	1880 [130] 2180 [150] 2470 [170]	1670 [115] 1960 [135] 2250 [155]
Max. Oil Flow GPM [lpm]	cont. Int.*	20 [75]	20 [75]	20 [75]	20 [75]	20 [75]
Max. Inlet Pressure PSI [bar]	cont. Int.* peak**	3340 [230]	3340 [230]	3340 [230]	3340 [230]	3340 [230]
Max. Return Pressure with Drain Line PSI [bar]	cont. Int.* peak**	2030 [140] 2540 [175] 3050 [210]				
Max. Starting Pressure with Unloaded Shaft, PSI [bar]	115 [8]	115 [8]	115 [8]	115 [8]	115 [8]	115 [8]
Min. Starting Torque lb-in [daNm]	at max. press. drop cont. at max. press. drop Int.*	4960 [56]	6280 [71]	6280 [71]	6280 [71]	6280 [71]
Min. Speed***, [RPM]		6	5	5	5	5
Weight, lb [kg]	MLHS(F)	25.8 [11,7]	27.3 [12,4]	29.3 [13,1]	31 [14,1]	32.2 [14,6]
For Rear Ports + .88[0,40]	MLHSB	26.9 [12,2]	28.4 [12,9]	30.4 [13,8]	32.2 [14,6]	33.3 [15,1]
	MLHSS(Z)	21.4 [9,7]	22.9 [10,4]	24.9 [11,3]	26.7 [12.1]	27.8 [12,6]
	MLHSV	16.7 [7,6]	18.3 [8,3]	20.2 [9,2]	22 [10]	23.1 [10,5]
	MLHSW(E)	26.7 [12,1]	28.2 [12,8]	30.2 [13,7]	32 [14,5]	33.1 [15]
	MLHSBD	41.2 [18,7]	42.7 [19,4]	44.7 [20,3]	46.5 [21,1]	47.6 [21,6]
						33.9 [15,4]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

MLHS 80

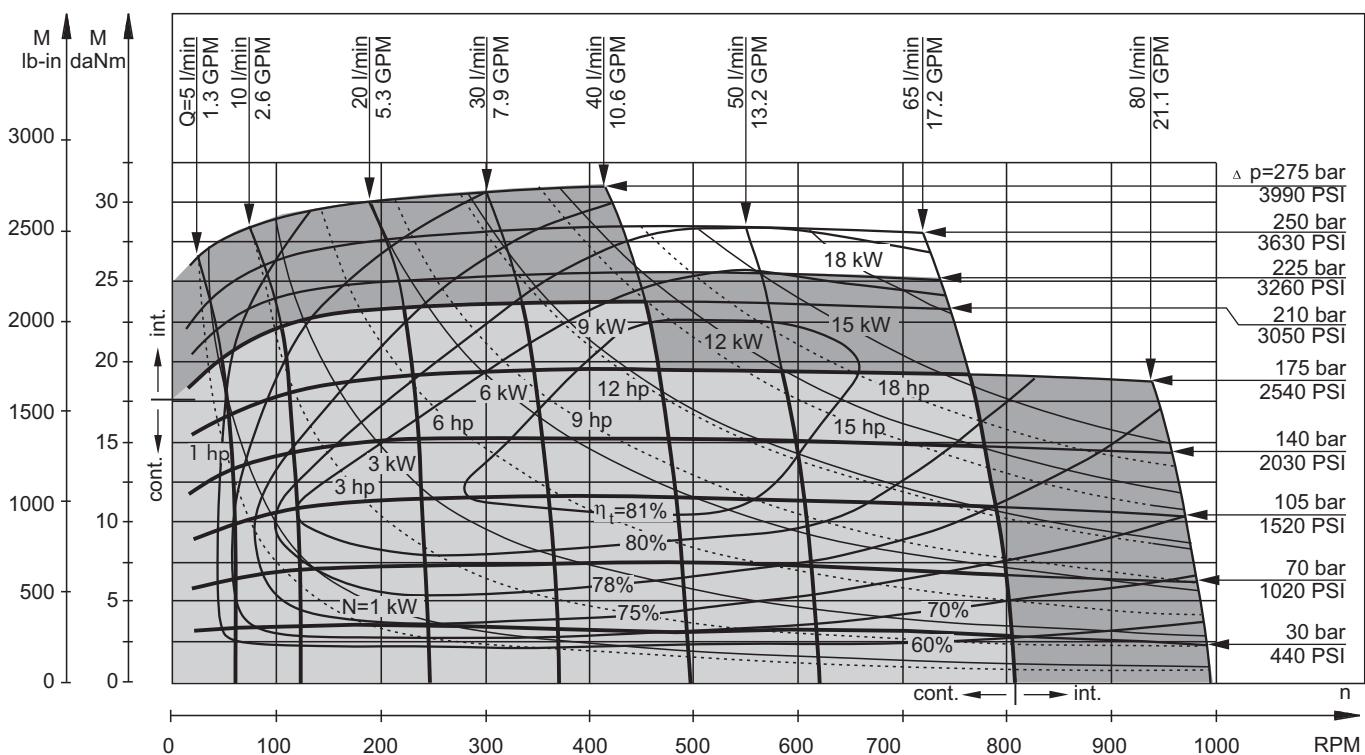


MLHS 100

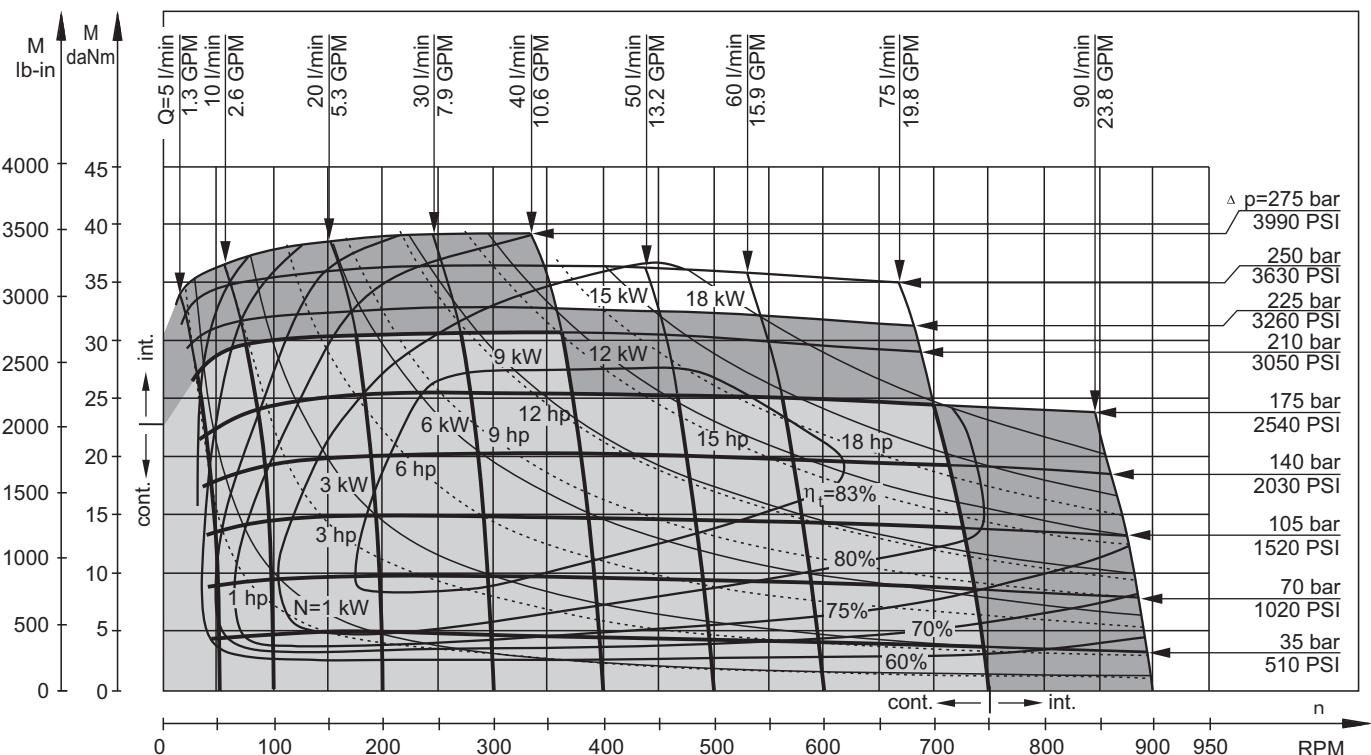


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHS 125

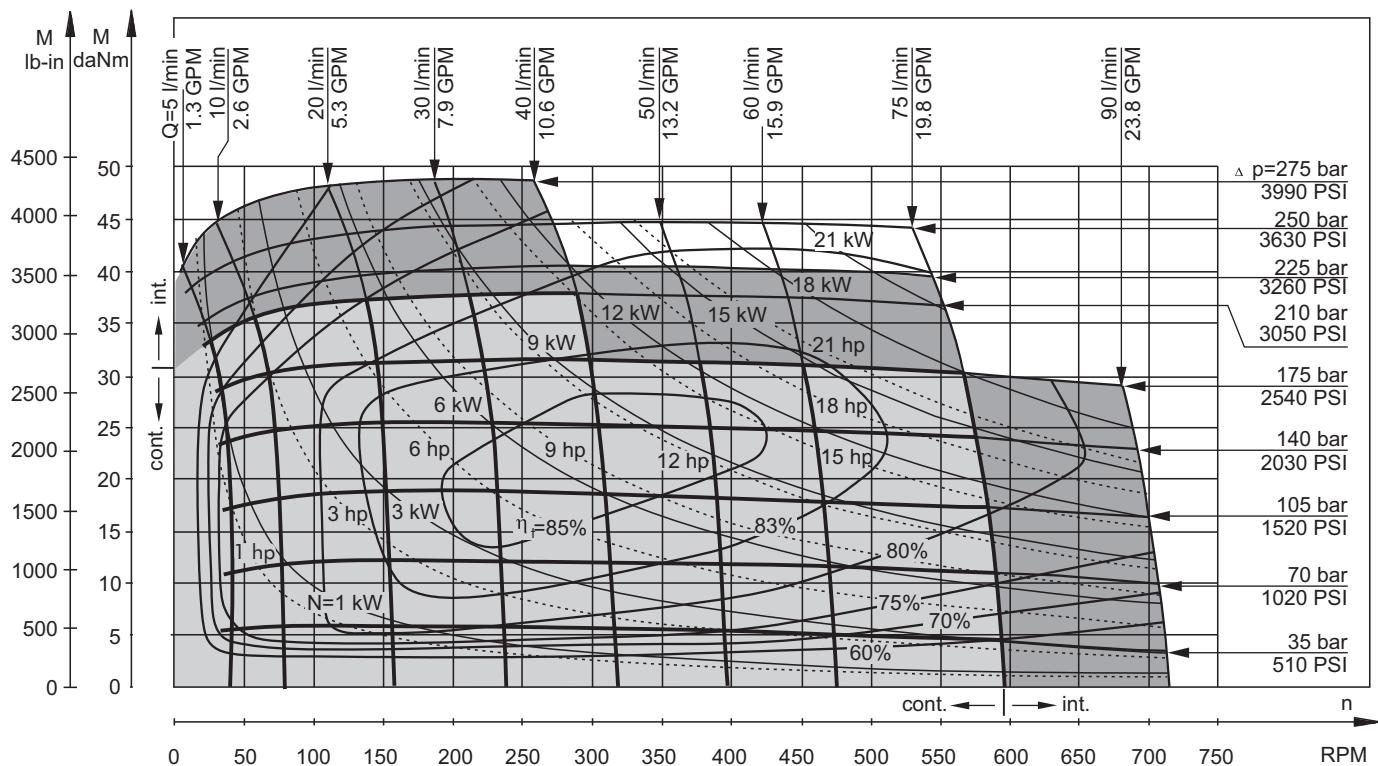


MLHS 160

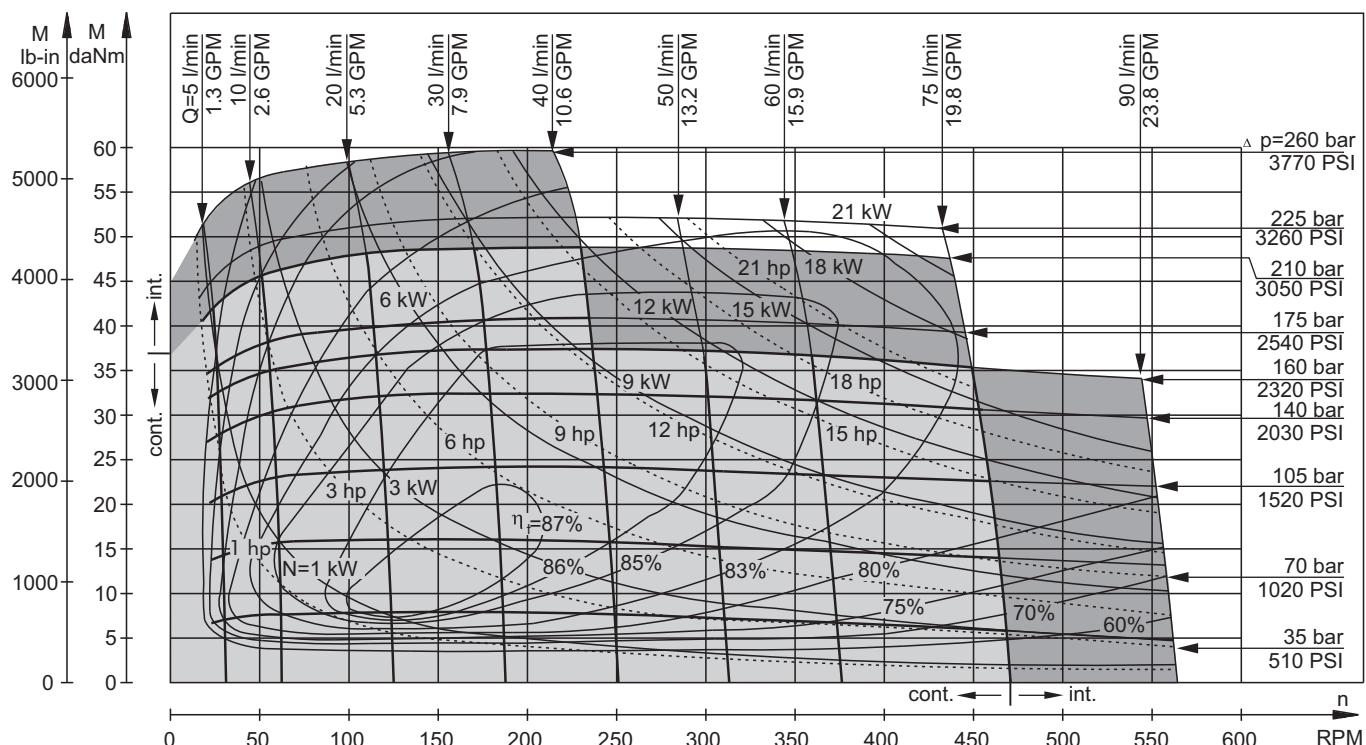


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHS 200

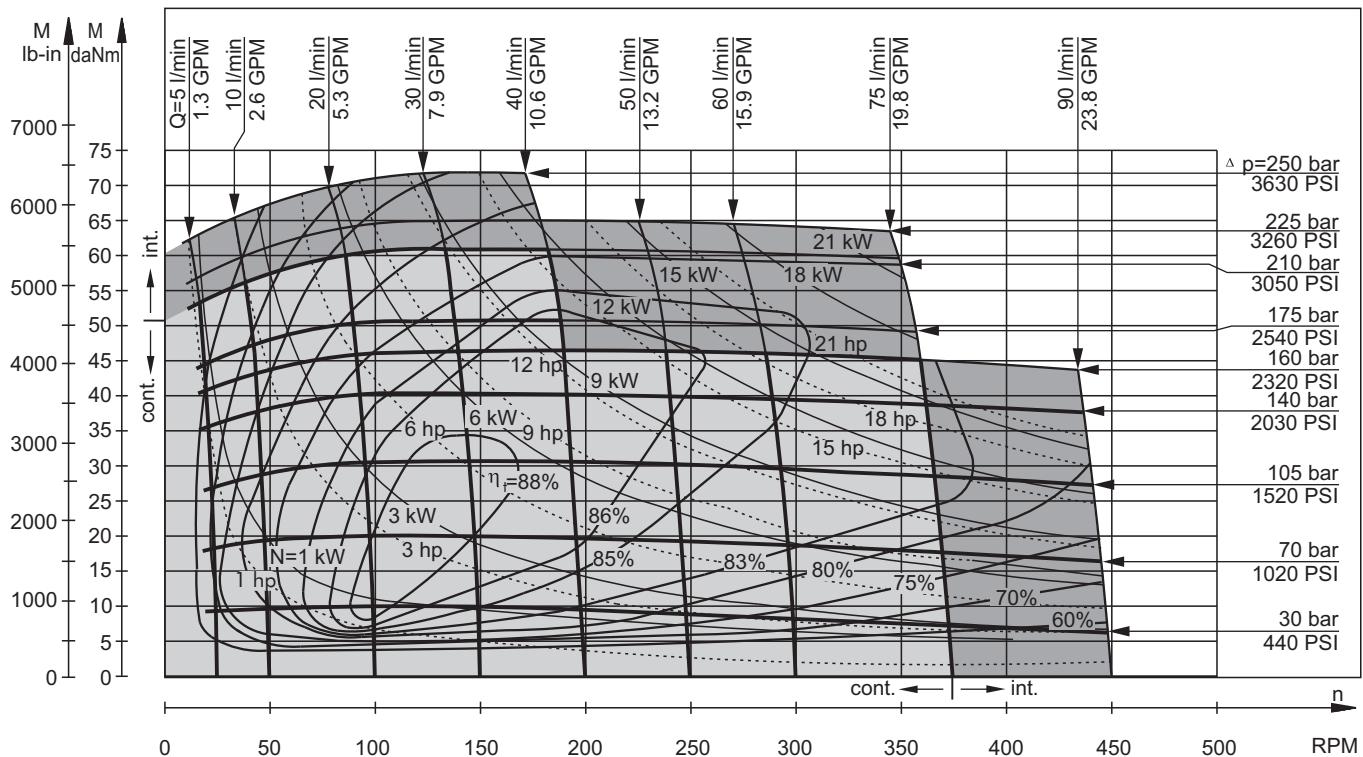


MLHS 250

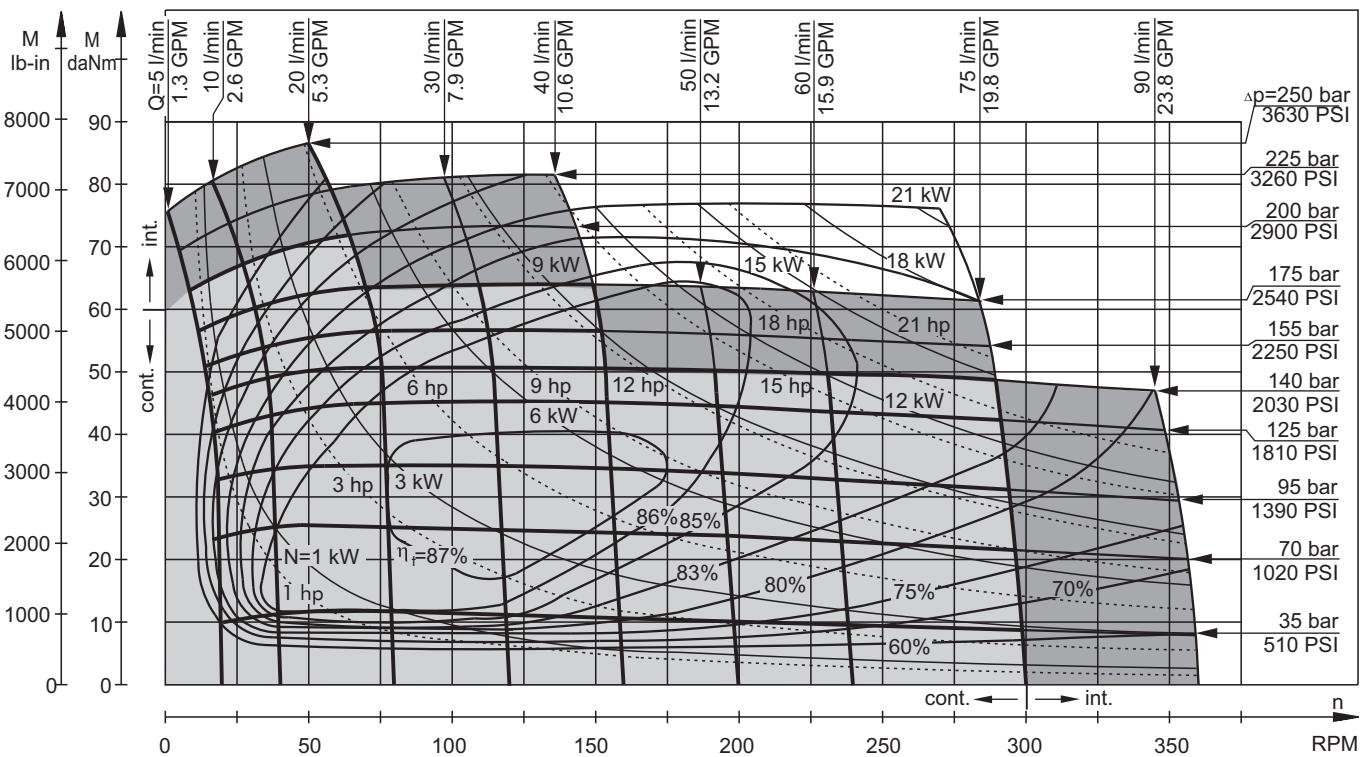


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHS 315

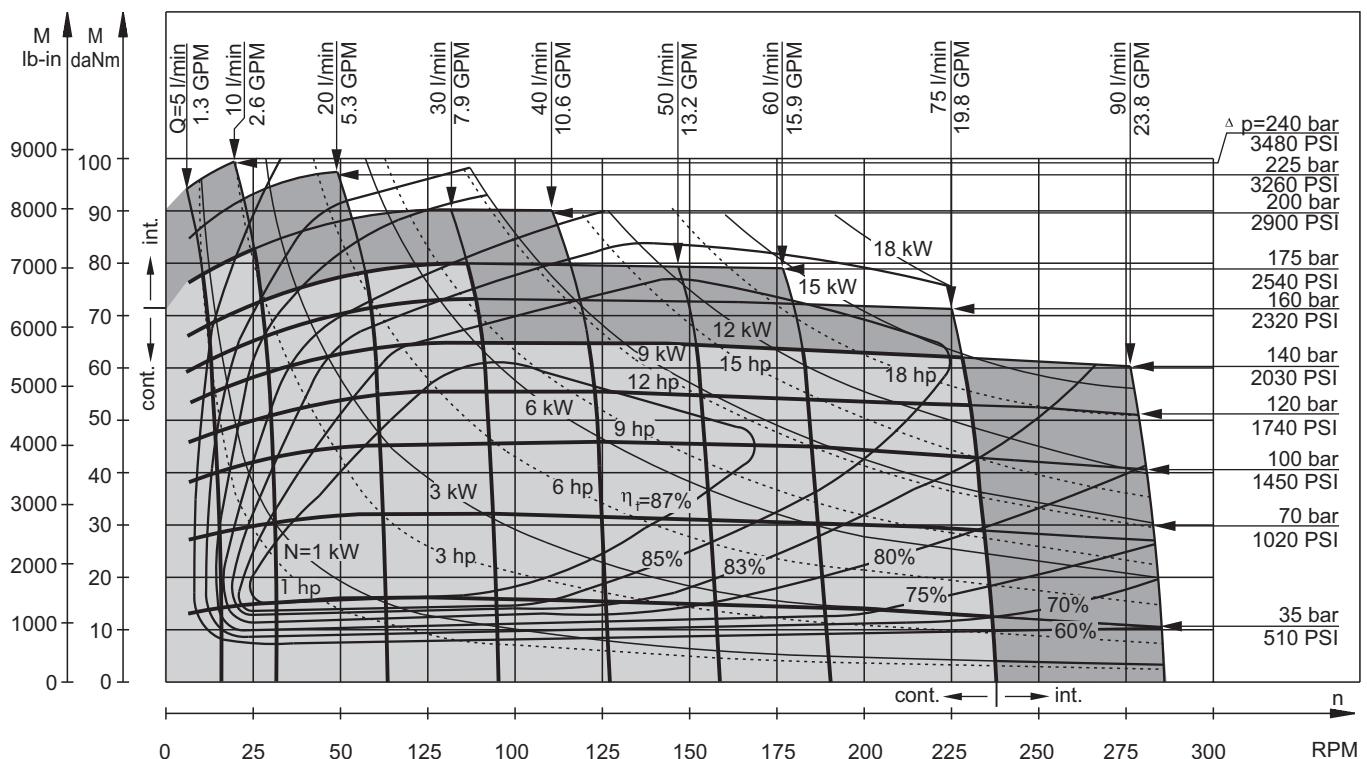


MLHS 400

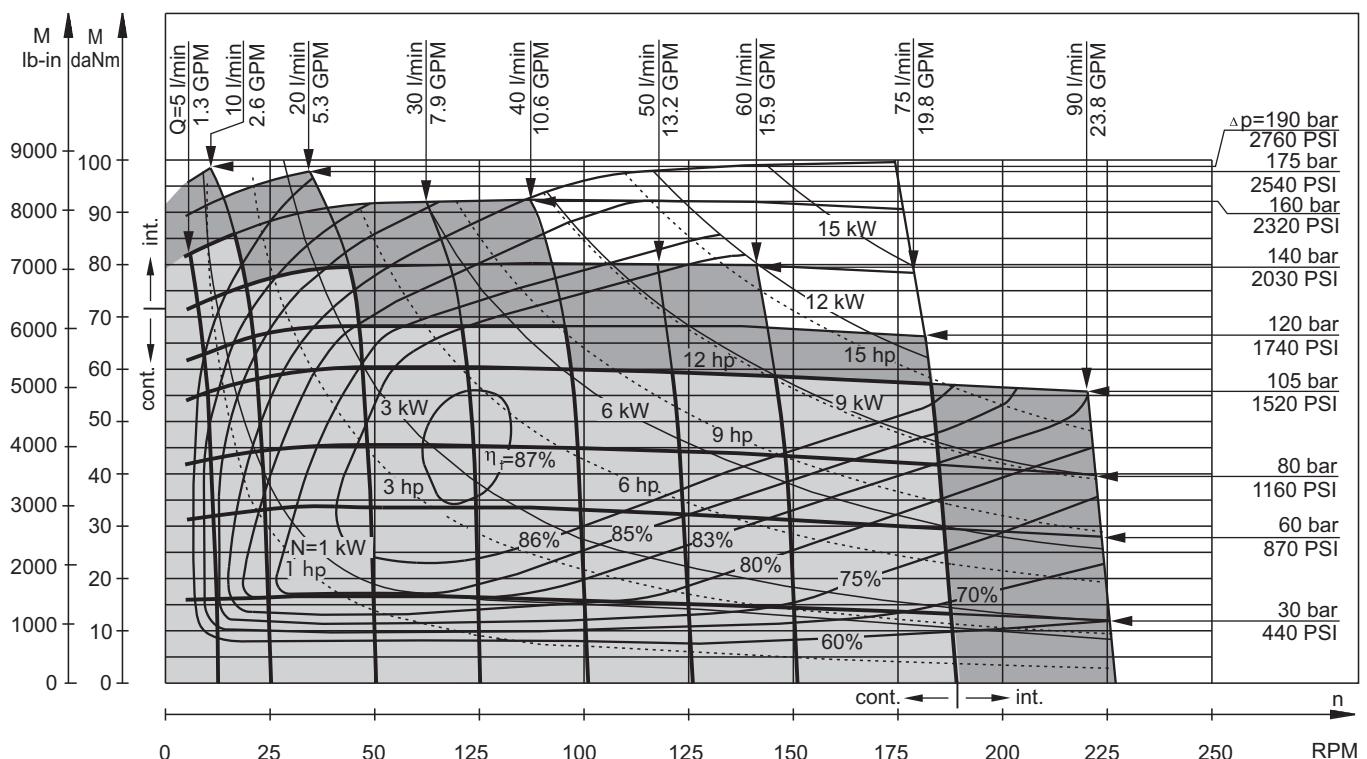


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHS 475

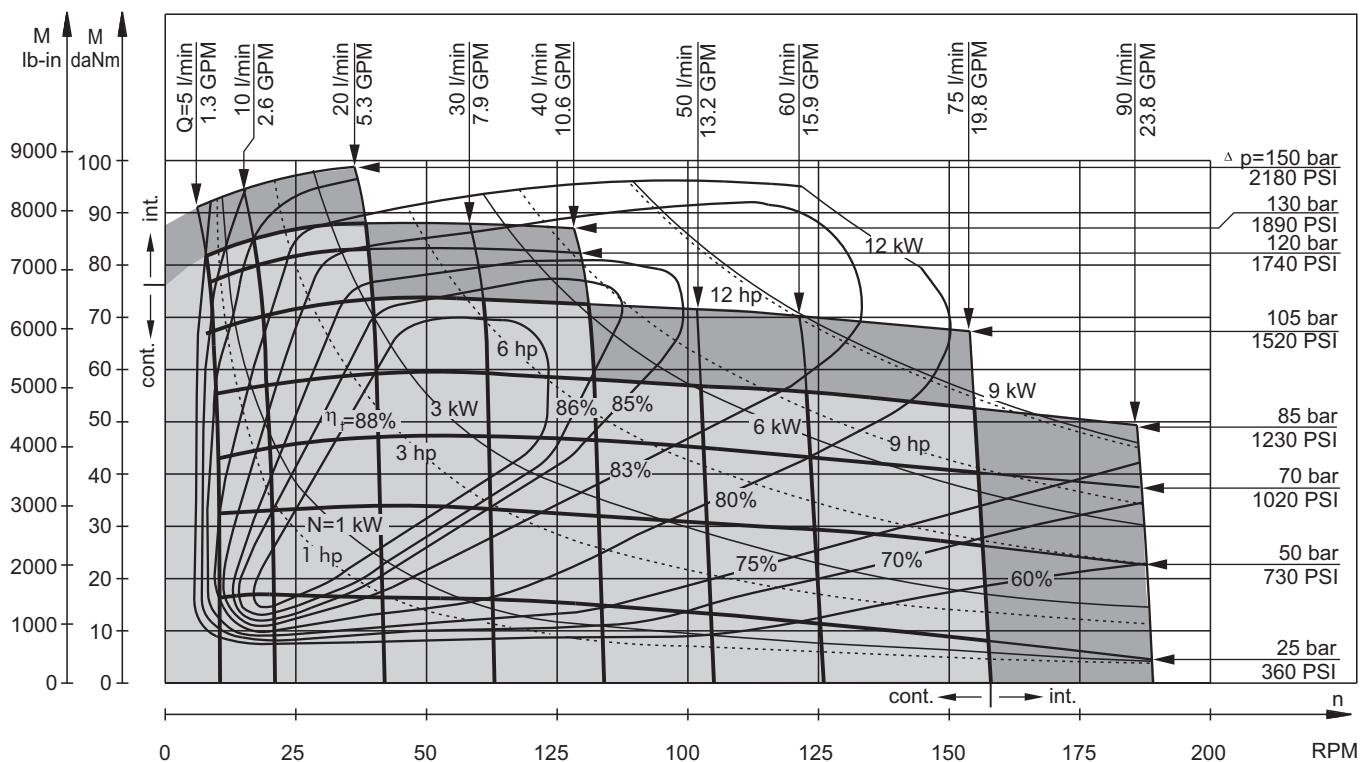


MLHS 525

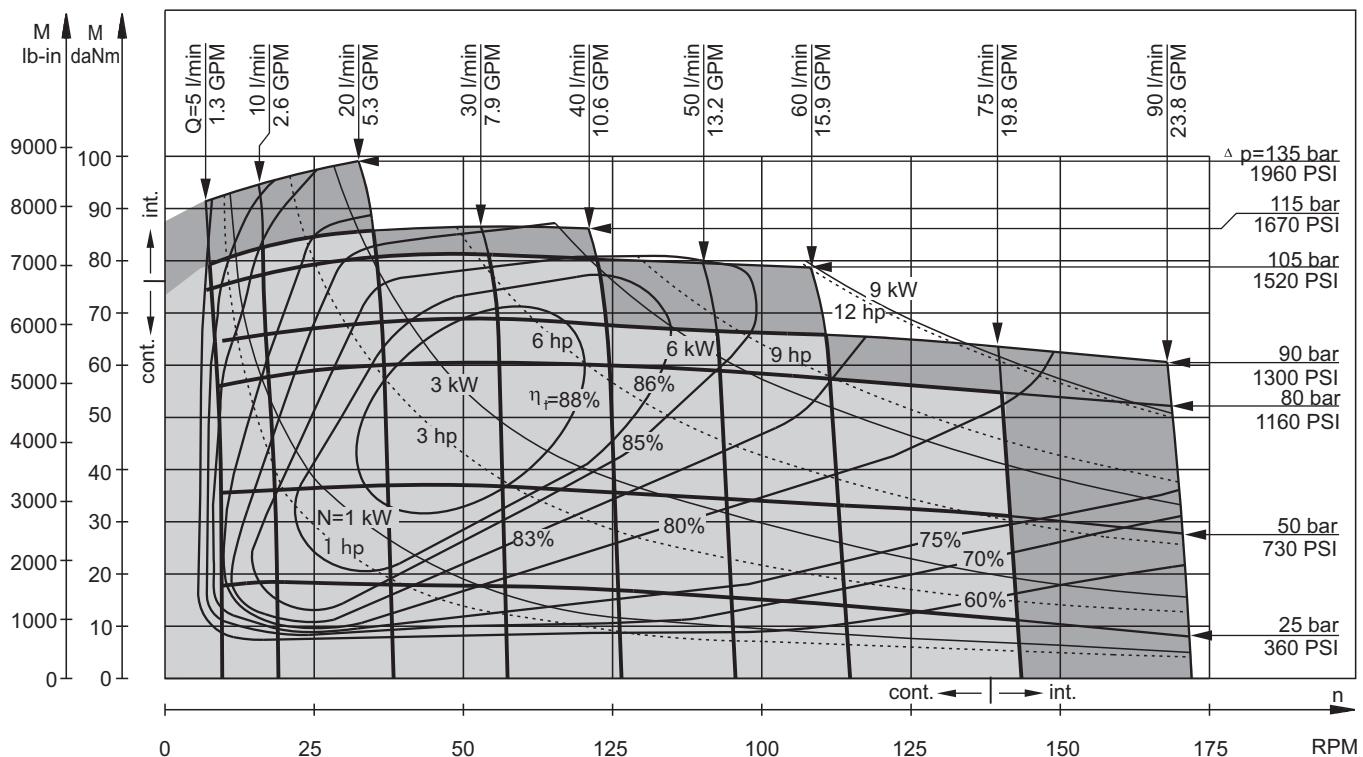

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS


MLHS 565

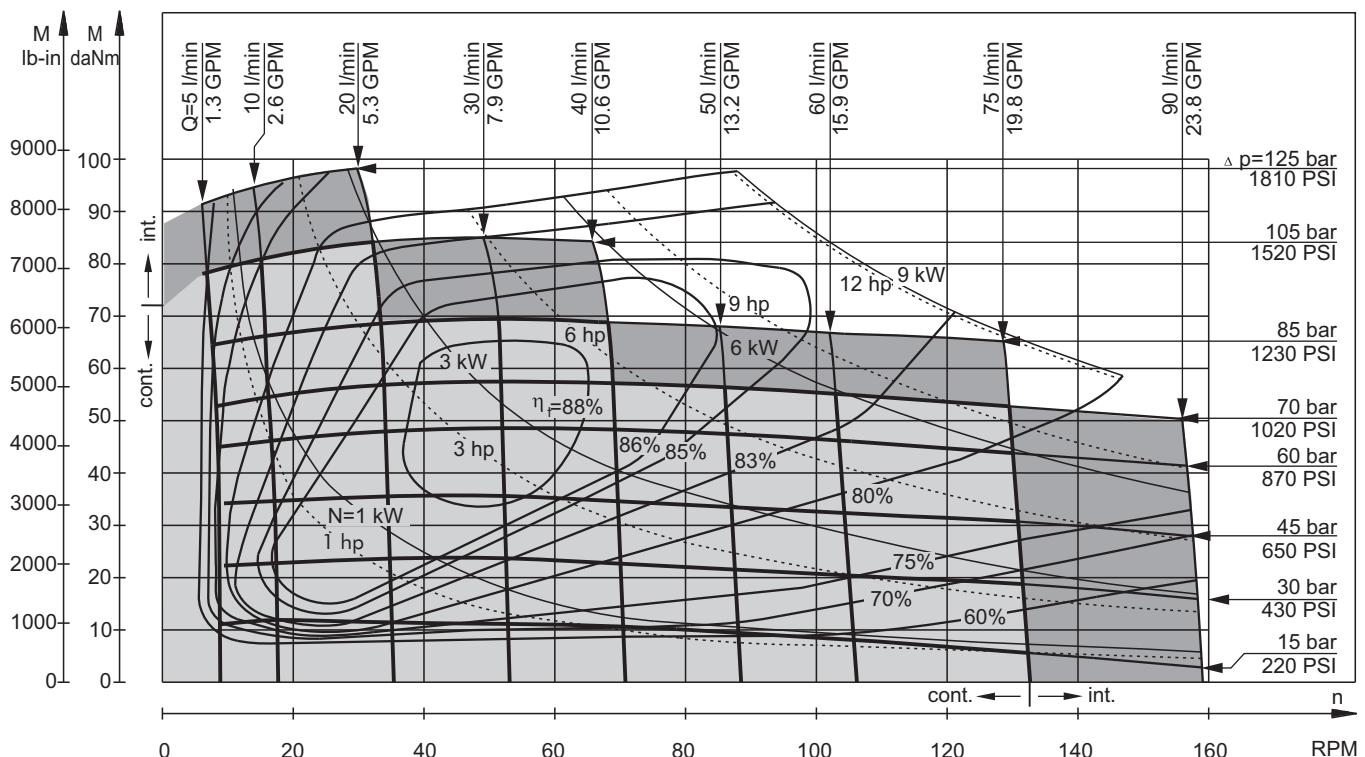

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

MAX. PERMISSIBLE SHAFT SEAL PRESSURE

Max. return pressure without drain line or
max. pressure in the drain line

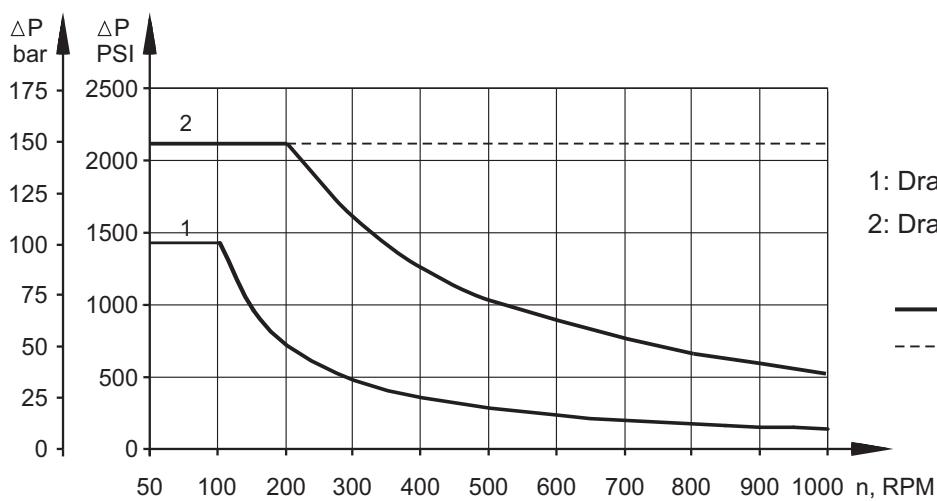

1: Drawing for Standard Shaft Seal


2: Drawing for High Pressure Seal ("U" Seal)

— continuous operations
- - - - - intermittent operations


DIMENSIONS AND MOUNTING DATA

MLHS, MLHSF, MLHSA

Shaft Dim.
See Page 17

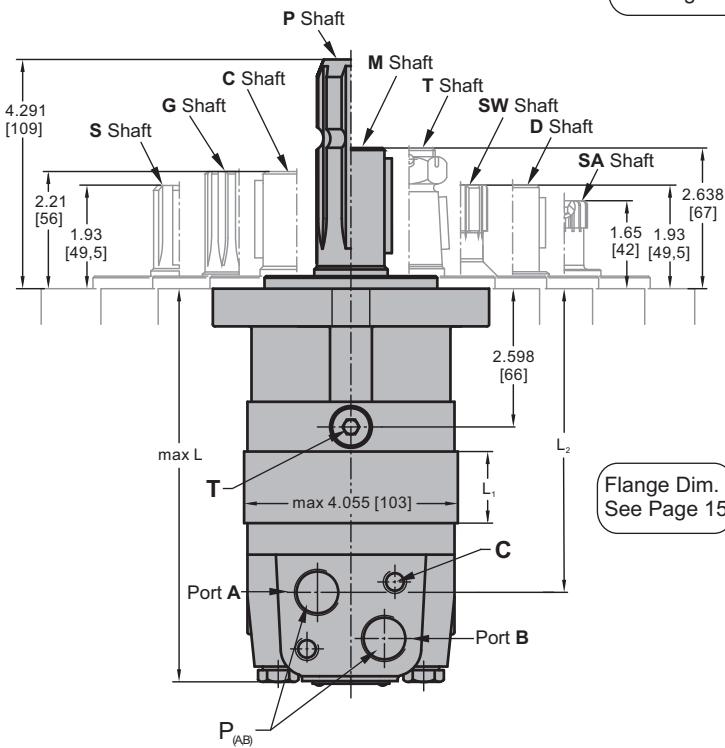


MLHSB

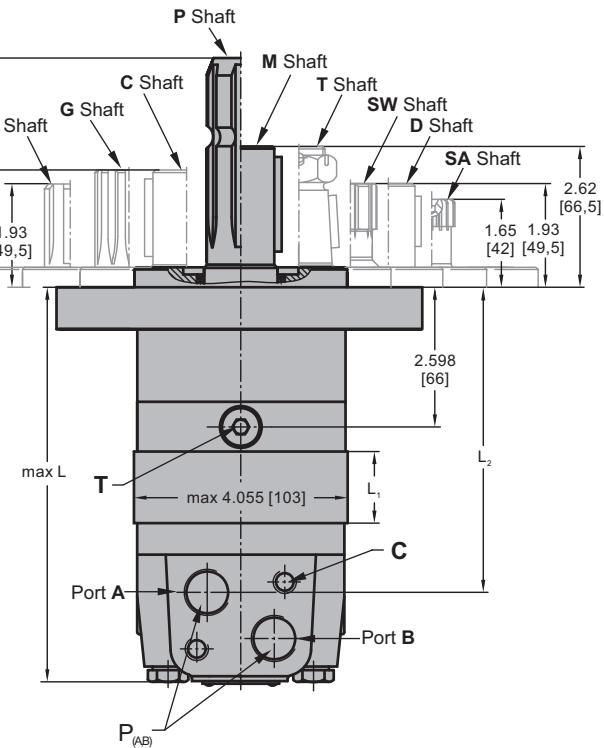

Versions 6 7 8 9

Rear ports

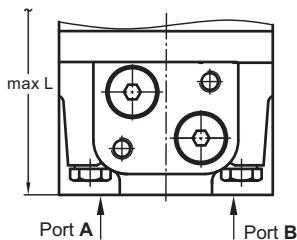

Port Dim.
See Page 16

Versions

	2, 6	3, 9	4, 7	5, 8
C	2xM10	2xM10	2x $\frac{3}{8}$ -16UNC	2x $\frac{3}{8}$ -16UNC
P _(A,B)	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ -14UNF	2x $\frac{1}{2}$ -14NPTF
T	G $\frac{1}{4}$	M14x1,5	$\frac{7}{16}$ -20UNF	$\frac{7}{16}$ -20UNF

Type	L _{max} , in [mm]		L ₁ , in [mm]	L ₂ , in [mm]
	Versions 2,3,4,5	*Versions 6,7,8,9		
MLHS(A,F,B) 80	6.61 [168]	6.89 [175]	.55 [14,0]	4.88 [124]
MLHS(A,F,B) 100	6.73 [171]	7.05 [179]	.69 [17,4]	5.04 [128]
MLHS(A,F,B) 125	6.93 [176]	7.21 [183]	.86 [21,8]	5.20 [132]
MLHS(A,F,B) 160	7.17 [182]	7.44 [189]	1.09 [27,8]	5.43 [138]
MLHS(A,F,B) 200	7.44 [189]	7.72 [196]	1.37 [34,8]	5.71 [145]
MLHS(A,F,B) 250	7.76 [197]	8.07 [205]	1.71 [43,5]	6.06 [154]
MLHS(A,F,B) 315	8.23 [209]	8.50 [216]	2.16 [54,8]	6.50 [165]
MLHS(A,F,B) 400	8.78 [223]	9.05 [230]	2.73 [69,4]	7.05 [179]
MLHS(A,F,B) 475	9.33 [237]	9.61 [244]	3.25 [82,6]	7.60 [193]
MLHS(A,F,B) 525	9.02 [229]	9.29 [236]	2.93 [74,5]	7.28 [185]
MLHS(A,F,B) 565	9.25 [235]	9.53 [242]	3.16 [80,2]	7.52 [191]

* - For Rear Ported Motors.

Standard Rotation

Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW





in [mm]

DIMENSIONS AND MOUNTING DATA


MLHSE

MLHSE

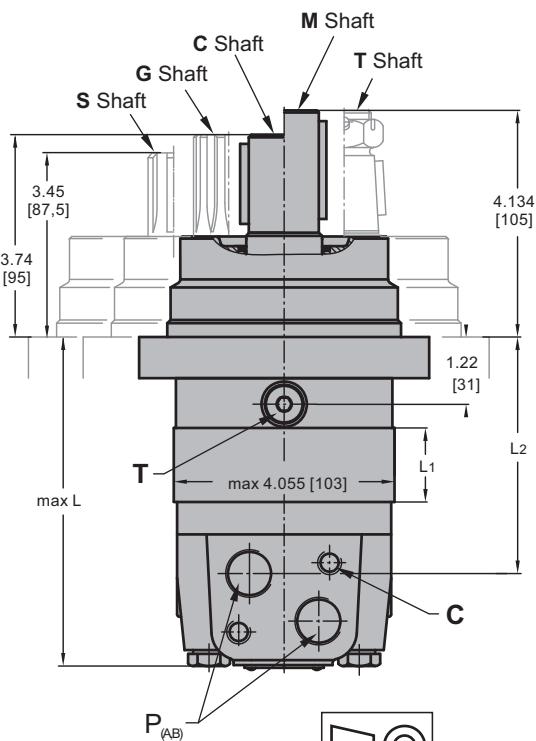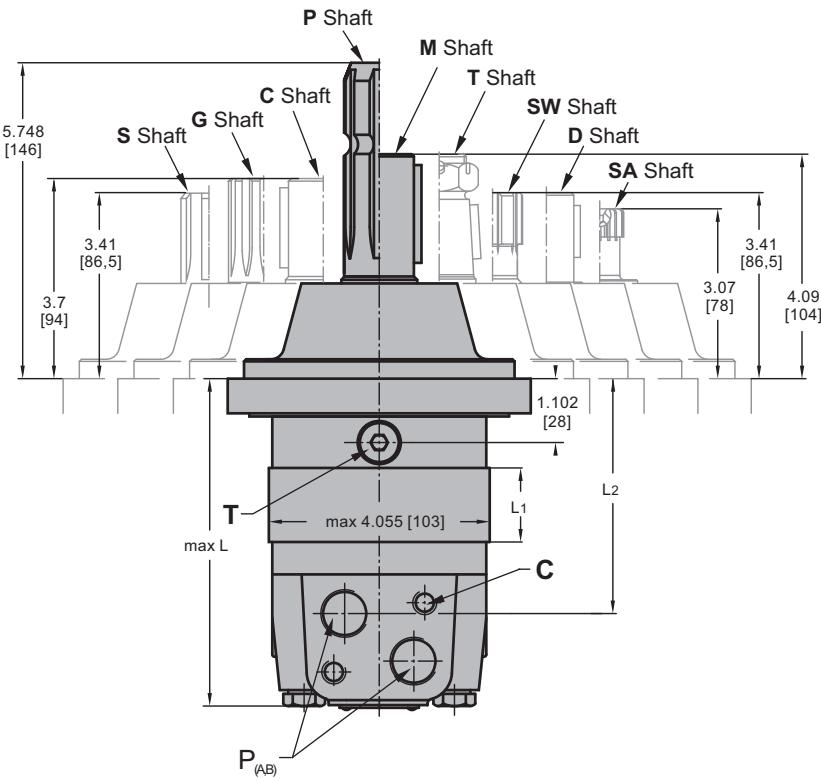

Versions **6 7 8 9**

Rear ports

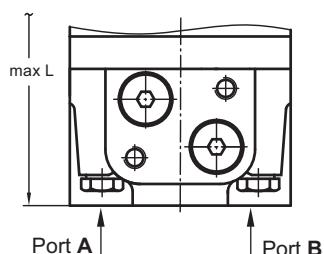

	Versions			
	2,6	3,9	4,7	5,8
C	2xM10	2xM10	2x3/8-16UNC	2x3/8-16UNC
P _(AB)	2xG1/2	2xM22x1,5	2x7/8-14UNF	2x1/2-14NPTF
T	G1/4	M14x1,5	7/16-20UNF	7/16-20UNF

Standard Rotation

Viewed from Shaft End

Port A Pressurized - **CW**

Port B Pressurized - **CCW**

Reverse Rotation

Viewed from Shaft End

Port A Pressurized - **CCW**


Port B Pressurized - **CW**

Type	L _{max} , in [mm]		L ₂ , in [mm]	Type	L _{max} , in [mm]		L ₂ , in [mm]	L ₁ , in [mm]
	Versions 2,3,4,5	*Versions 6,7,8,9			Versions 2,3,4,5	*Versions 6,7,8,9		
MLHSE 80	5.16 [131]	5.43 [138]	3.43 [87]	MLHSE 80	5.24 [133]	5.51 [140]	3.60 [91,5]	.55 [14,0]
MLHSE 100	5.28 [134]	5.59 [142]	3.58 [91]	MLHSE 100	5.39 [137]	5.67 [144]	3.74 [95]	.69 [17,4]
MLHSE 125	5.47 [139]	5.75 [146]	3.74 [95]	MLHSE 125	5.55 [141]	5.83 [148]	3.90 [99]	.86 [21,8]
MLHSE 160	5.71 [145]	5.99 [152]	3.98 [101]	MLHSE 160	5.79 [147]	6.06 [154]	4.13 [105]	1.09 [27,8]
MLHSE 200	5.98 [152]	6.26 [159]	4.25 [108]	MLHSE 200	6.06 [154]	6.34 [161]	4.41 [112]	1.37 [34,8]
MLHSE 250	6.30 [160]	6.62 [168]	4.61 [117]	MLHSE 250	6.42 [163]	6.69 [170]	4.76 [121]	1.71 [43,5]
MLHSE 315	6.73 [171]	7.05 [179]	5.04 [128]	MLHSE 315	6.85 [174]	7.13 [181]	5.20 [132]	2.16 [54,8]
MLHSE 400	7.32 [186]	7.64 [194]	5.63 [143]	MLHSE 400	7.44 [189]	7.72 [196]	5.79 [147]	2.73 [69,4]
MLHSE 475	7.87 [200]	8.15 [207]	6.14 [156]	MLHSE 475	7.95 [202]	8.23 [209]	6.26 [159]	3.25 [82,6]
MLHSE 525	7.56 [192]	7.84 [199]	5.83 [148]	MLHSE 525	7.64 [194]	7.91 [201]	5.95 [151]	2.93 [74,5]
MLHSE 565	7.79 [198]	8.07 [205]	6.06 [154]	MLHSE 565	7.87 [200]	8.15 [207]	6.18 [157]	3.16 [80,2]


* - For Rear Ported Motors.

MOUNTING


SAE A-4 Mount (4 Holes)

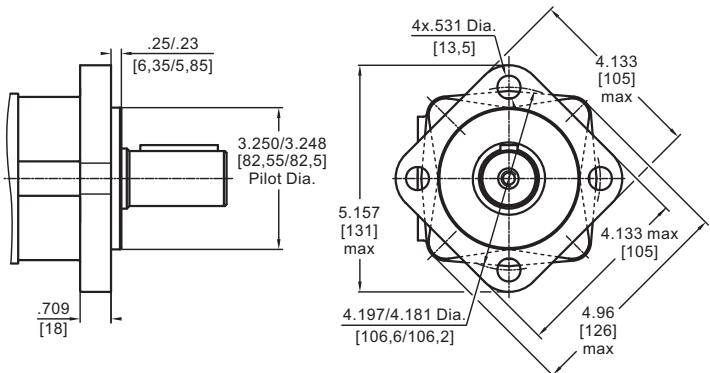


SAE B Mount (2 Holes)

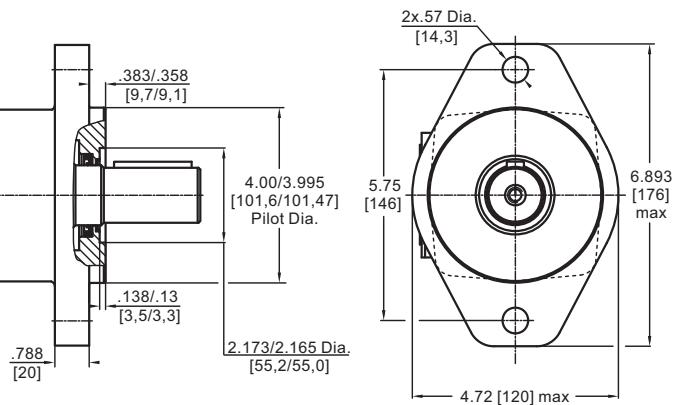


A SAE A-2 Mount (2 Holes)

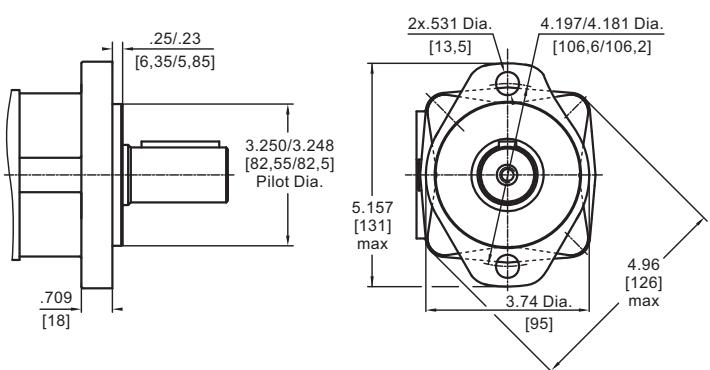



W Wheel Mount

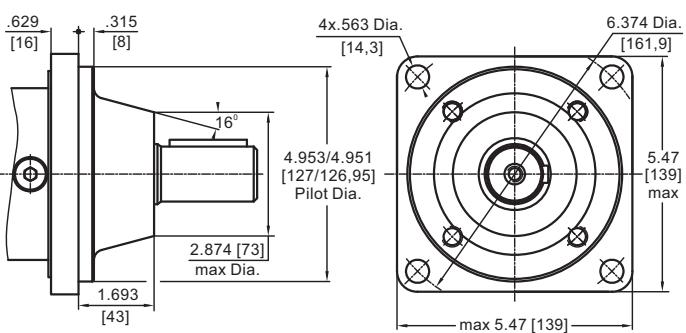

F Magneto Mount (4 Holes)

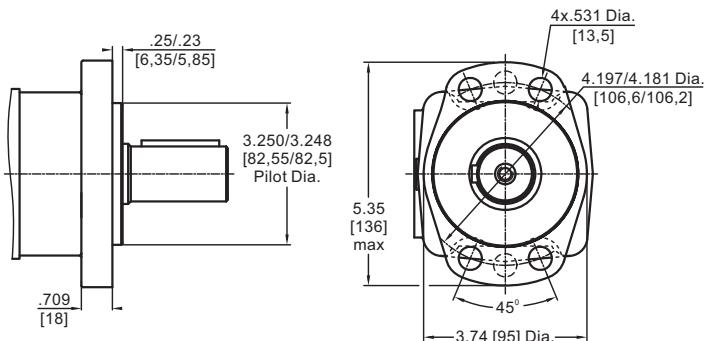

E Wheel Mount


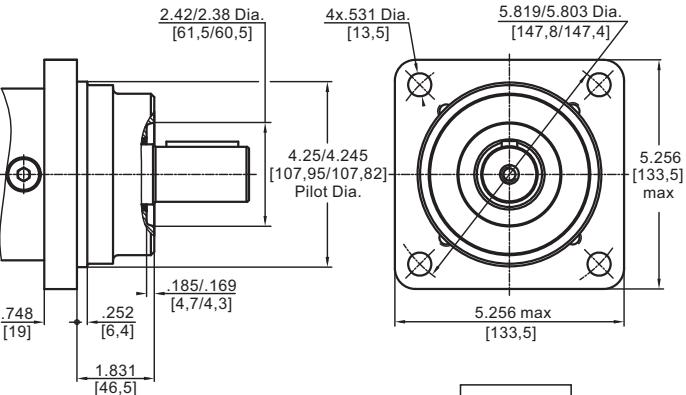


in [mm]

PORTS


Side Ports

Version **2** **3** **4** **5**

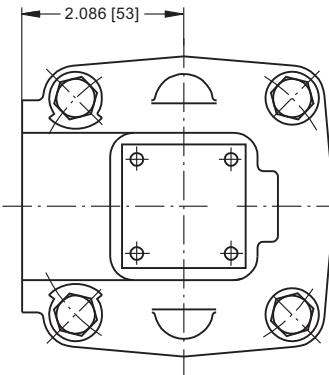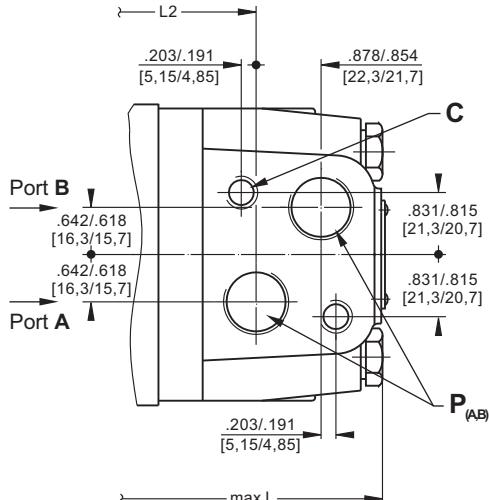

Rear Ports

Version **6** **7** **8** **9**

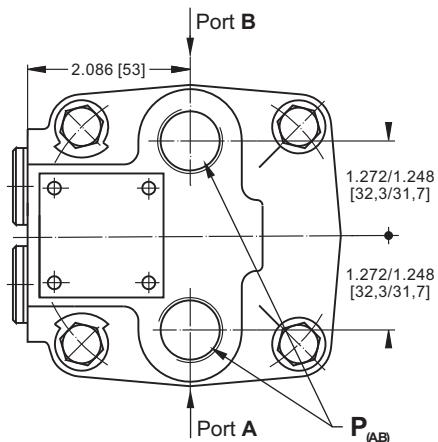

Standard Rotation

Viewed from Shaft End

Port **A** Pressurized - **CW**

Port **B** Pressurized - **CCW**

Reverse Rotation




Viewed from Shaft End

Port **A** Pressurized - **CCW**

Port **B** Pressurized - **CW**

	Versions			
	2,6	3,9	4,7	5,8
C	2xM10	2xM10	2x $\frac{3}{8}$ -16UNC	2x $\frac{3}{8}$ -16UNC
P_(A,B)	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ -14UNF	2x $\frac{1}{2}$ -14NPTF
T	G $\frac{1}{4}$	M14x1,5	$\frac{7}{16}$ -20UNF	$\frac{7}{16}$ -20UNF

MOTORS WITH TACHO CONNECTION

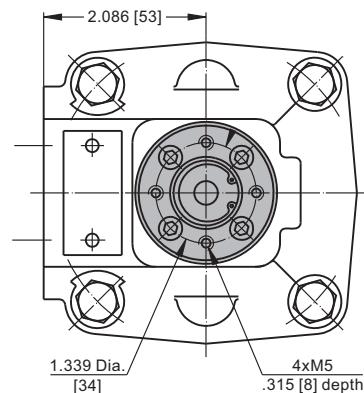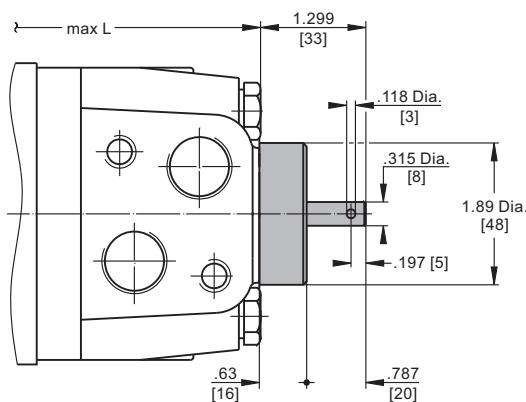

in [mm]



DIMENSIONS AND MOUNTING DATA - MLHSBD (MOTOR WITH DRUM BRAKE)

Actuating the brake lever, the brake shaft is turned. The rectangular shape of the inner part of this shaft forces the brake pads to be pressed against the brake drum. This brakes the wheel or the winch drum. Releasing the lever, the springs pull it and the brake pads back to the initial position. The motor output shaft is released.

Minimum angle adjustment is 10°. It can be adjusted by dismantling the lever.


Depending on the application You can choose the actuating direction of the brake lever.

The rod connection actuating the brake should be capable of moving at least .975 in [25 mm] from neutral to extreme position.

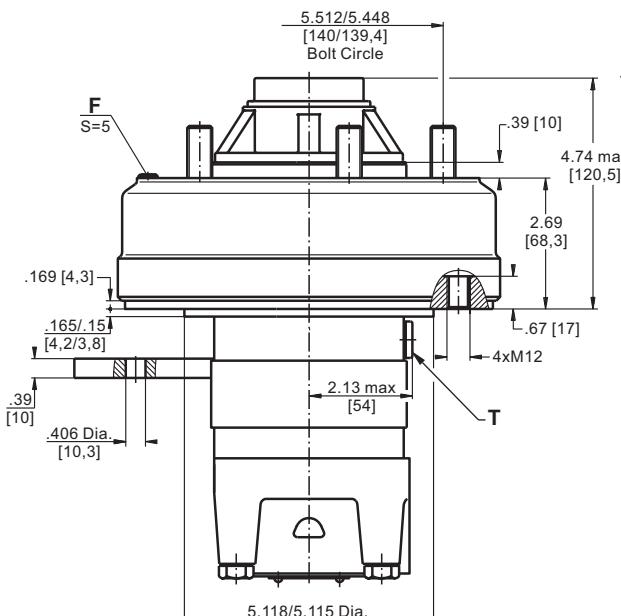



BD Flange

Versions **2** **3** **4** **5**

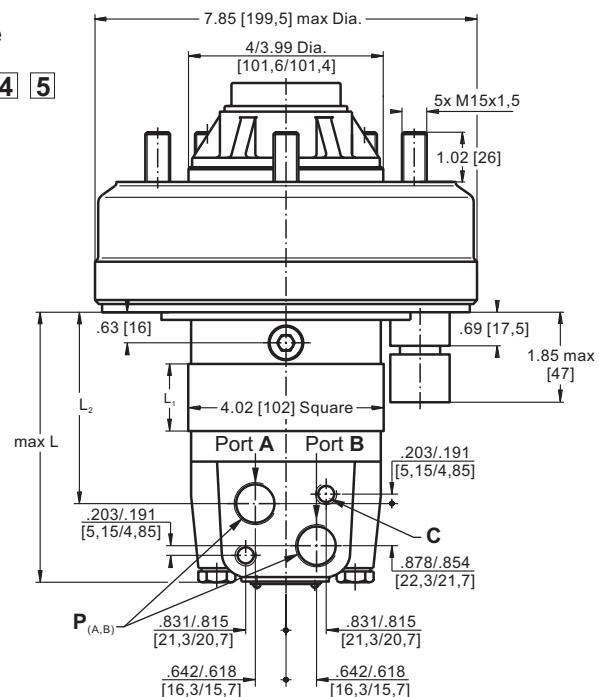


Versions **6** **7** **8** **9**

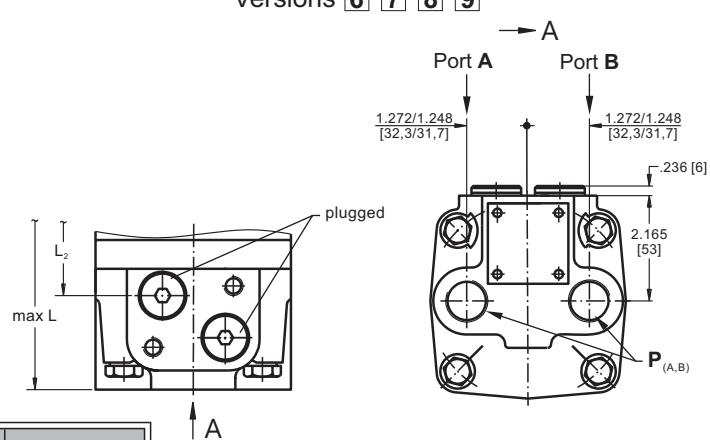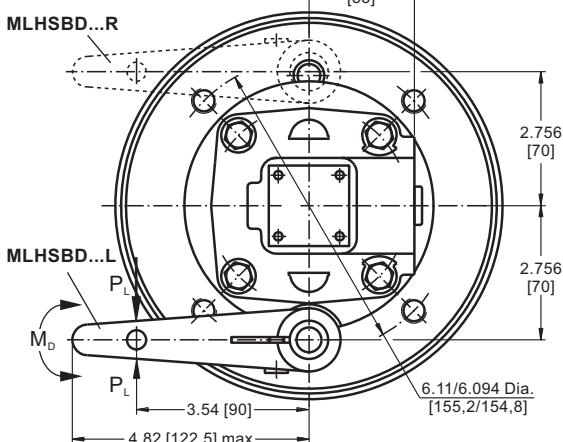

Type	L max, in [mm]		L ₁ , in [mm]	L ₂ , in [mm]
	Versions 2,3,4,5	Versions 6,7,8,9		
MLHSBD 80	4.69 [119]	5.00 [127]	.55 [14.0]	2.91 [74]
MLHSBD 100	4.80 [122]	5.12 [130]	.69 [17.4]	3.03 [77]
MLHSBD 125	4.96 [126]	5.28 [134]	.86 [21.8]	3.23 [82]
MLHSBD 160	5.20 [132]	5.51 [140]	1.09 [27.8]	3.47 [88]
MLHSBD 200	5.47 [139]	5.79 [147]	1.37 [34.8]	3.74 [95]
MLHSBD 250	5.83 [148]	6.14 [156]	1.71 [43.5]	4.33 [110]
MLHSBD 315	6.26 [159]	6.57 [167]	2.16 [54.8]	4.53 [115]
MLHSBD 400	6.85 [174]	7.17 [182]	2.73 [69.4]	5.12 [130]
MLHSBD 475	7.40 [188]	7.72 [196]	3.25 [82.6]	5.63 [143]
MLHSBD 525	7.09 [180]	7.40 [188]	2.93 [74.5]	5.32 [135]
MLHSBD 565	7.32 [186]	7.56 [192]	3.16 [80.2]	5.55 [141]

Standard Rotation Viewed from Shaft End
Port A Pressurized - **CW** Port A Pressurized - **CCW**
Port B Pressurized - **CCW** Port B Pressurized - **CW**


	Versions			
	2,6	3,9	4,7	5,8
C	2xM10	2xM10	2x ³ / ₈ -16UNC	2x ³ / ₈ -16UNC
P_(A,B)	2xG ¹ / ₂	2xM22x1,5	2x ⁷ / ₈ -14UNF	2x ¹ / ₂ -14NPTF
T	G ¹ /4	M14x1,5	7/16-20UNF	7/16-20UNF
F	Inspection hole for checking brake lining			




in [mm]

SHAFT EXTENSIONS


C
1 1/4" [31,75] straight, Parallel key 5/16" x 5/16" x 1 1/4" BS46
Max. Torque 6815 lb-in [77 daNm]

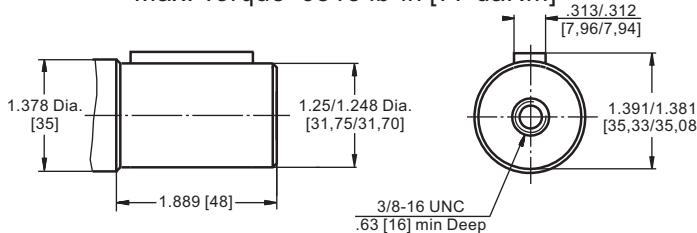


D
1" [25,4] straight, Parallel key 1/4"x 1/4"x 1" BS46
Max. Torque 3900 lb-in [44 daNm]

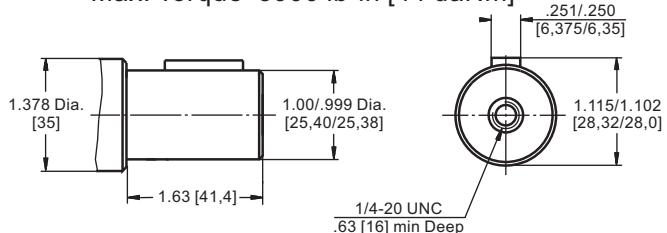


G
14T Splined, 1 1/4" [31,75], ANS B92.1-1976
Max. Torque 8400 lb-in [95 daNm]

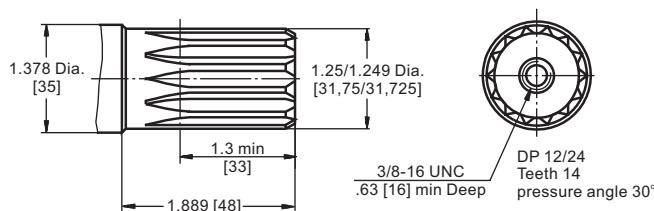


M
ø32 straight, Parallel key A10x8x45 DIN 6885
Max. Torque 6815 lb-in [77 daNm]

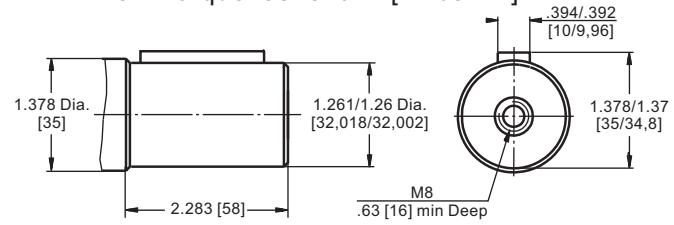


S
1" [25,4], SAE 6B Splined BS2059
Max. Torque 3900 lb-in [44 daNm]

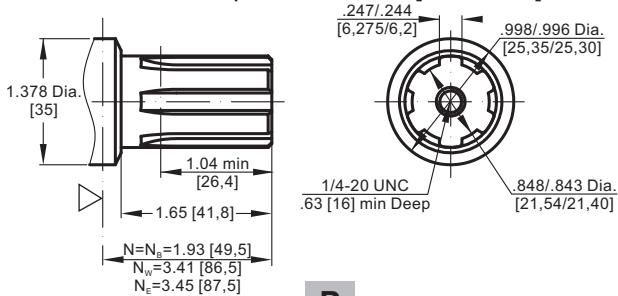


SW
1" [25,4], SAE 6B Splined BS2059
Max. Torque 3400 lb-in [38 daNm]

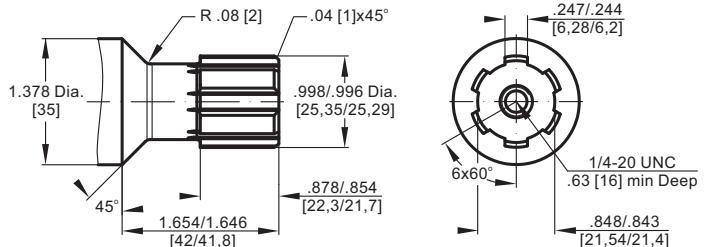



P
ø34,85, p.t.o., DIN 9611 Form 1
Max. Torque 6815 lb-in [77 daNm]

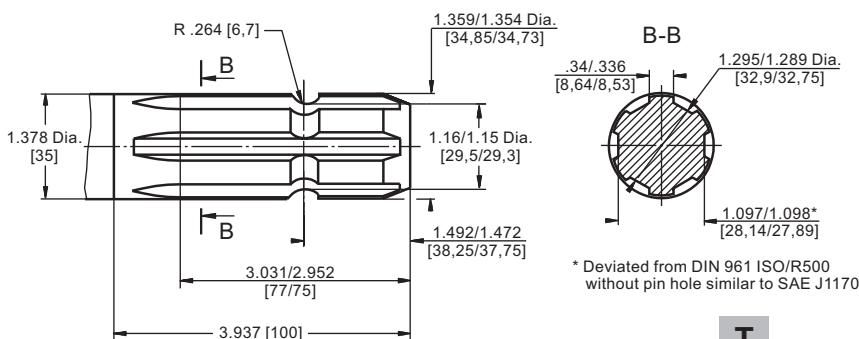

SA
7/8"-13T splined DP16/32 ANS B92.1-1970
Max. Torque 1770 lb-in [20 daNm]

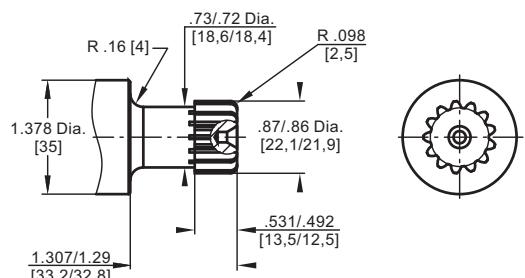


T
1 1/4" [31,75] SAE J501 Tapered, Parallel key 5/16"x 5/16"x 1" BS46
Max. Torque 8400 lb-in [95 daNm]

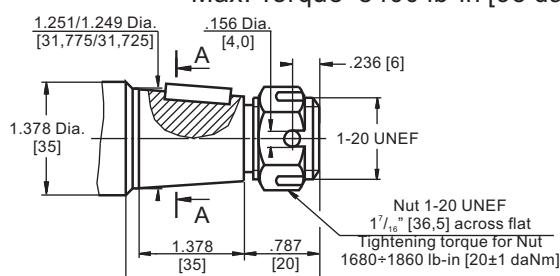

1.5 Taper per Foot
[cone 1:8]


Requirement max. Torque
must not be exceeded.




PERMISSIBLE SHAFT LOADS

The output shaft runs in tapered bearings that permit high axial and radial forces. The permissible radial load on the shaft is shown for an axial load of 0 N as function of the distance from the mounting flange to the point of load application. The curves apply to a B10 bearing life of 2000 hours at 100 RPM.

Curve "1" shows max. radial shaft load. Any shaft load exceeding the values shown by the curve will seriously reduce motor life.

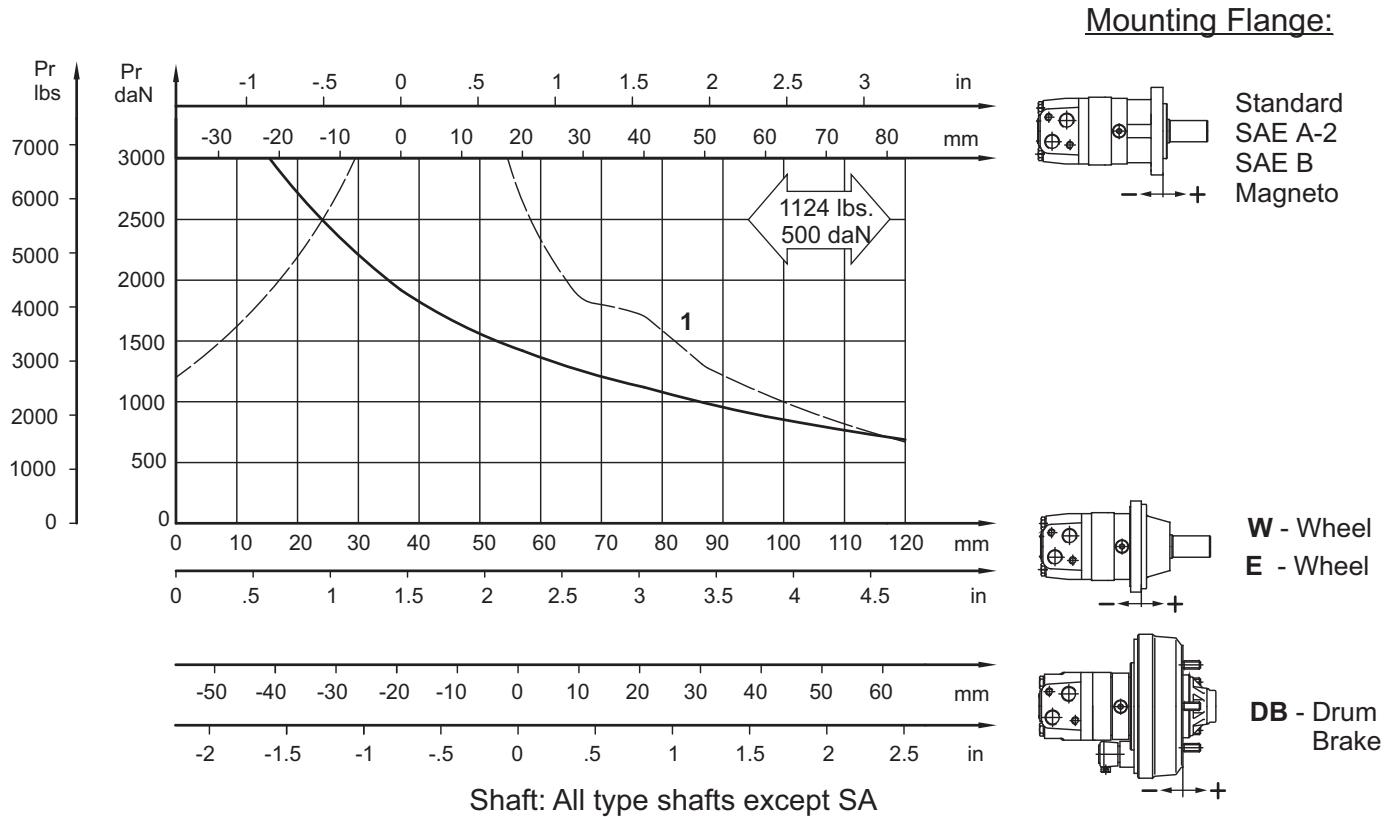



FUNCTION DIAGRAM MLHSBD

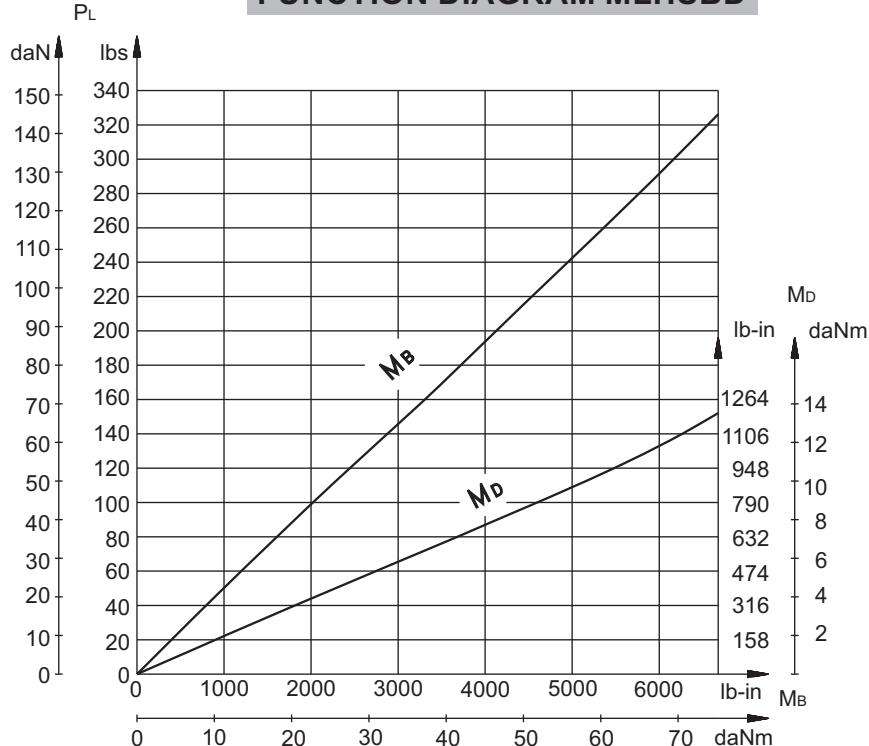


P_L - Brake Lever Load
 M_B - Brake Torque
 M_D - Brake Lever Torque

DIMENSIONS AND MOUNTING DATA - MLHSS and MLHSZ

S Short Mount

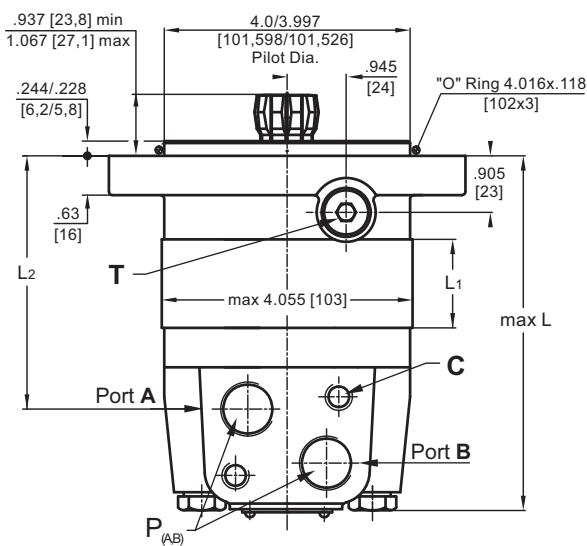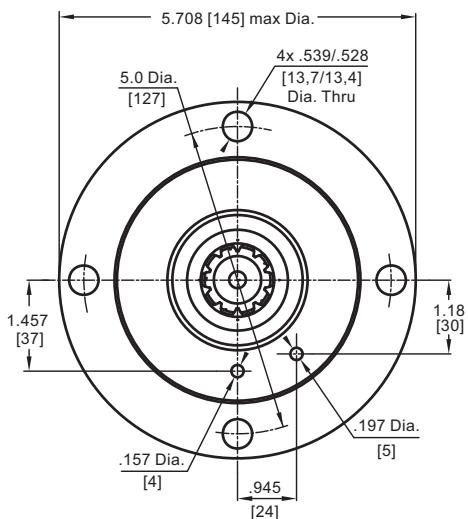

Versions **6** **7** **8** **9**

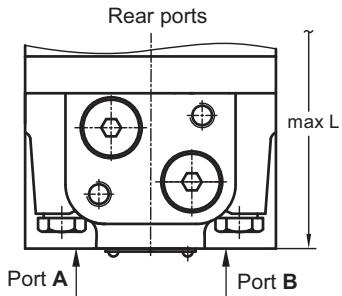

Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End



Port A Pressurized - CCW

Port B Pressurized - CW


	Versions			
	2,6	3,9	4,7	5,8
C	2xM10	2xM10	2x $\frac{3}{8}$ -16UNC	2x $\frac{3}{8}$ -16UNC
P_(AB)	2xG $\frac{1}{2}$	2xM22x1.5	2x $\frac{7}{8}$ -14UNF	2x $\frac{1}{2}$ -14NPTF
T	G $\frac{1}{4}$	M14x1.5	$\frac{7}{16}$ -20UNF	$\frac{7}{16}$ -20UNF

Z Short Mount

(with place for needle bearing)

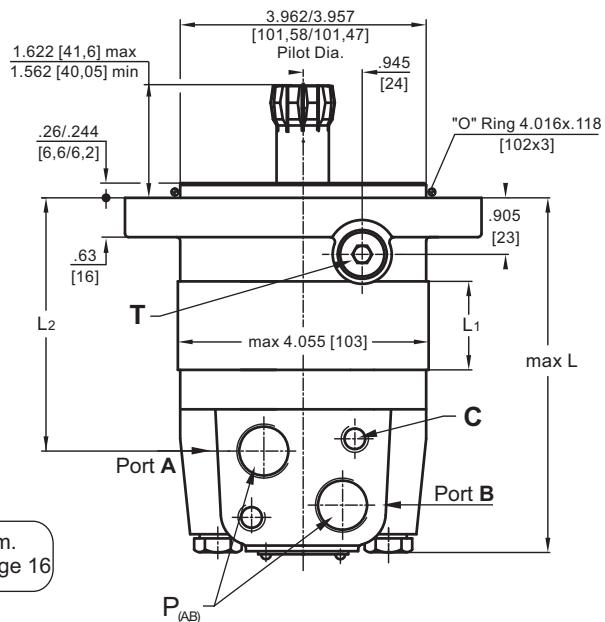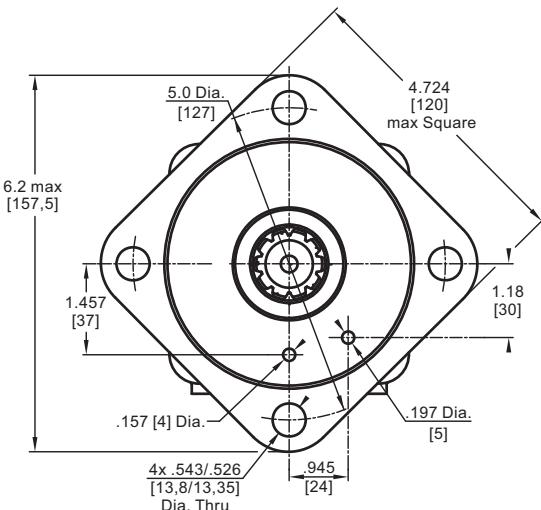

Port Dim.
See Page 16




in [mm]

Type	L max, in [mm]		L ₁ , in [mm]	L ₂ , in [mm]
	Versions 2,3,4,5	*Versions 6,7,8,9		
MLHSS(Z) 80	4.92 [125]	5.28 [134]	.55 [14,0]	3.27 [83]
MLHSS(Z) 100	5.08 [129]	5.43 [138]	.69 [17,4]	3.43 [87]
MLHSS(Z) 125	5.24 [133]	5.55 [141]	.86 [21,8]	3.54 [90]
MLHSS(Z) 160	5.47 [139]	5.79 [147]	1.09 [27,8]	3.78 [96]
MLHSS(Z) 200	5.75 [146]	6.06 [154]	1.37 [34,8]	4.05 [103]
MLHSS(Z) 250	6.10 [155]	6.42 [163]	1.71 [43,5]	4.41 [112]
MLHSS(Z) 315	6.54 [166]	6.85 [174]	2.16 [54,8]	4.84 [123]
MLHSS(Z) 400	7.13 [181]	7.44 [189]	2.73 [69,4]	5.43 [138]
MLHSS(Z) 475	7.64 [194]	7.99 [203]	3.25 [82,6]	5.98 [152]
MLHSS(Z) 525	7.32 [186]	7.68 [195]	2.93 [74,5]	5.67 [144]
MLHSS(Z) 565	7.56 [192]	7.91 [201]	3.16 [80,2]	5.91 [150]


* - For Rear Ported Motors.

DIMENSIONS AND MOUNTING DATA - MLHSV and MLHSU

V Very Short Mount

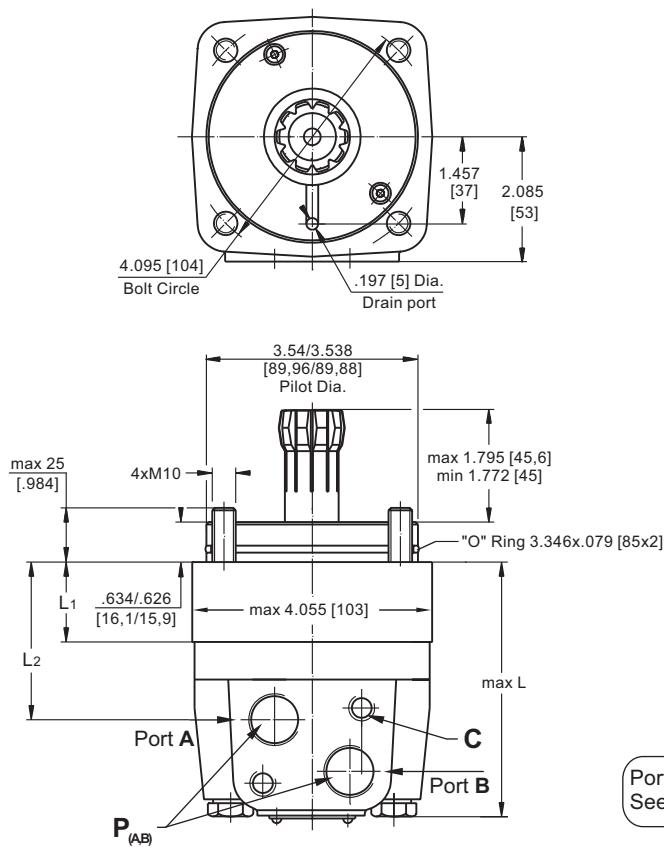


Versions **6 7 8 9**

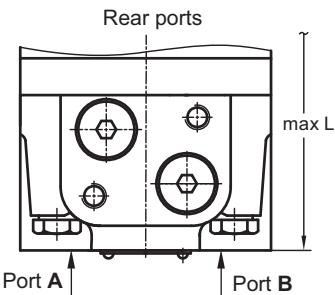

Port Dim.
See Page 16



U Ultra Short Mount

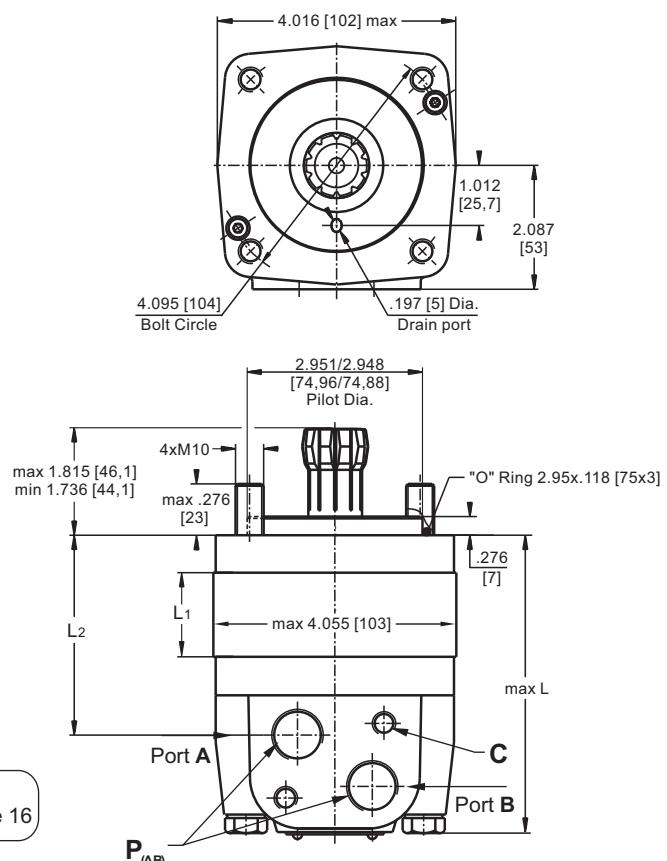

Standard Rotation

Viewed from Shaft End

Port A Pressurized - **CW**

Port B Pressurized - **CCW**

Reverse Rotation

Viewed from Shaft End

Port A Pressurized - **CCW**

Port B Pressurized - **CW**



	Versions			
	2,6	3,9	4,7	5,8
C	2xM10	2xM10	2x $\frac{3}{8}$ -16UNC	2x $\frac{3}{8}$ -16UNC
P_(A,B)	2xG $\frac{1}{2}$	2xM22x1,5	2x $\frac{7}{8}$ -14UNF	2x $\frac{1}{2}$ -14NPTF

Type	L max, in [mm]		L ₂ , in [mm]	Type	L max, in [mm]		L ₂ , in [mm]	L ₁ , in [mm]
	Versions 2,3,4,5	*Versions 6,7,8,9			Versions 2,3,4,5	*Versions 6,7,8,9		
MLHSV 80	3.58 [91]	3.82 [97]	1.85 [47]	MLHSU 80	4.15 [105,5]	4.39 [111,5]	2.48 [63]	.55 [14,0]
MLHSV 100	3.70 [94]	3.94 [100]	1.99 [50,5]	MLHSU100	4.29 [109]	4.53 [115]	2.62 [66,5]	.69 [17,4]
MLHSV 125	3.90 [99]	4.13 [105]	2.17 [55]	MLHSU 125	4.45 [113]	4.69 [119]	2.80 [71]	.86 [21,8]
MLHSV 160	4.13 [105]	4.37 [111]	2.40 [61]	MLHSU 160	4.69 [119]	4.92 [125]	3.03 [77]	1.09 [27,8]
MLHSV 200	4.41 [112]	4.64 [118]	2.78 [68]	MLHSU 200	4.96 [126]	5.20 [132]	3.31 [84]	1.37 [34,8]
MLHSV 250	4.72 [120]	4.96 [126]	3.01 [76,5]	MLHSU 250	5.32 [135]	5.55 [141]	3.64 [92,5]	1.71 [43,5]
MLHSV 315	5.20 [132]	5.43 [138]	3.46 [88]	MLHSU 315	5.75 [146]	5.98 [152]	4.09 [104]	2.16 [54,8]
MLHSV 400	5.75 [146]	6.02 [153]	4.05 [103]	MLHSU 400	6.30 [160]	6.58 [167]	4.69 [119]	2.73 [69,4]
MLHSV 475	6.30 [160]	6.54 [166]	4.57 [116]	MLHSU 475	6.85 [174]	7.09 [180]	5.20 [132]	3.25 [82,6]
MLHSV 525	5.98 [152]	6.22 [158]	4.25 [108]	MLHSU 525	6.54 [166]	6.77 [172]	4.88 [124]	2.93 [74,5]
MLHSV 565	6.22 [158]	6.46 [164]	4.49 [114]	MLHSU 565	6.77 [172]	7.01 [178]	5.12 [130]	3.16 [80,2]



* - For Rear Ported Motors.

DIMENSIONS OF THE ATTACHED COMPONENT

For MLHSS

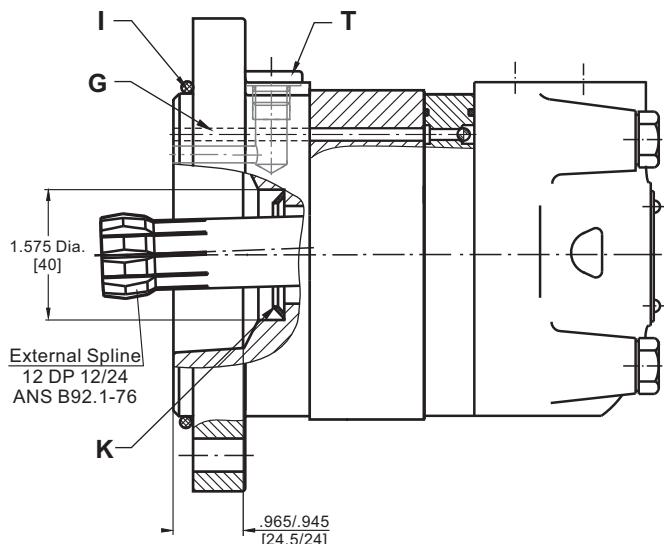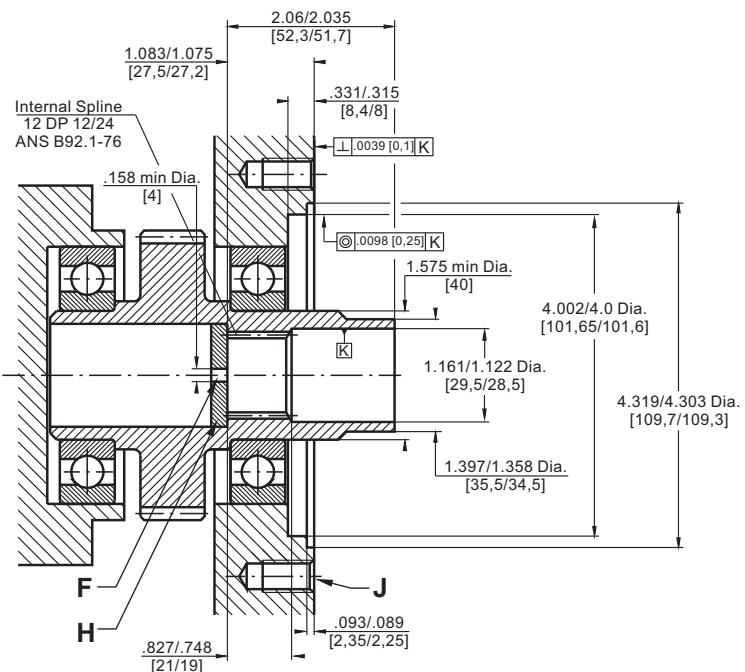

For MLHSZ

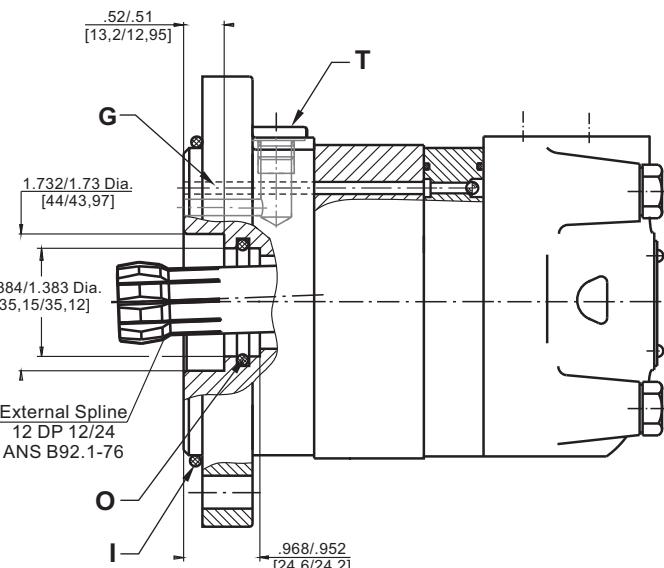
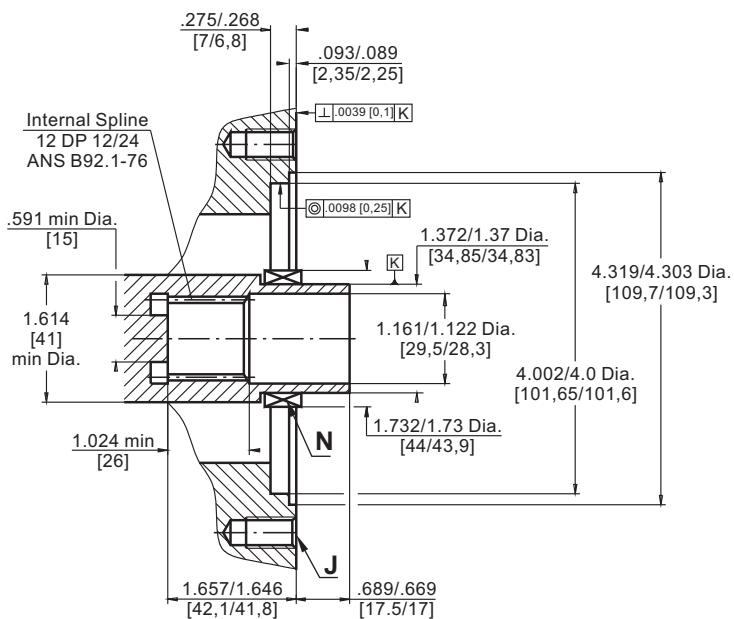


F: Oil circulation hole
H: Hardened stop plate
I : "O"- Ring 4.016x .118 [102x3]
K: Conical seal ring

G: Internal drain channel
J : 4x $\frac{1}{2}$ UN- min .61 [15] Deep, 90°, 5.00[127] Dia. B.C.
N: Needle bearing $1\frac{1}{8}'' \times 1\frac{1}{4}''$
O: "O"- Ring 1.358x .104 [34,5x2,65]
T : Drain connection G1/4, M14x1,5 or $\frac{1}{8}$ -20UNF

DIMENSIONS OF THE ATTACHED COMPONENT (continued)

For MLHSV

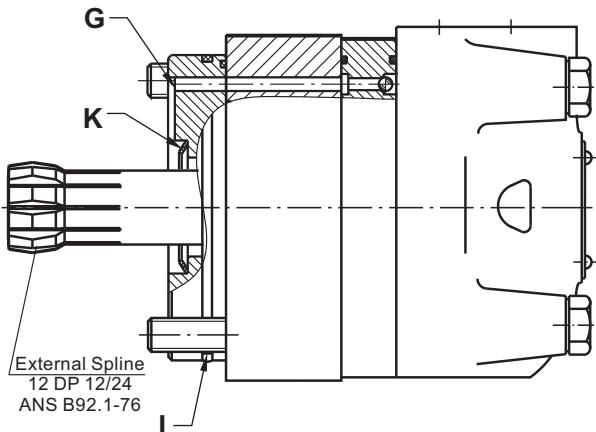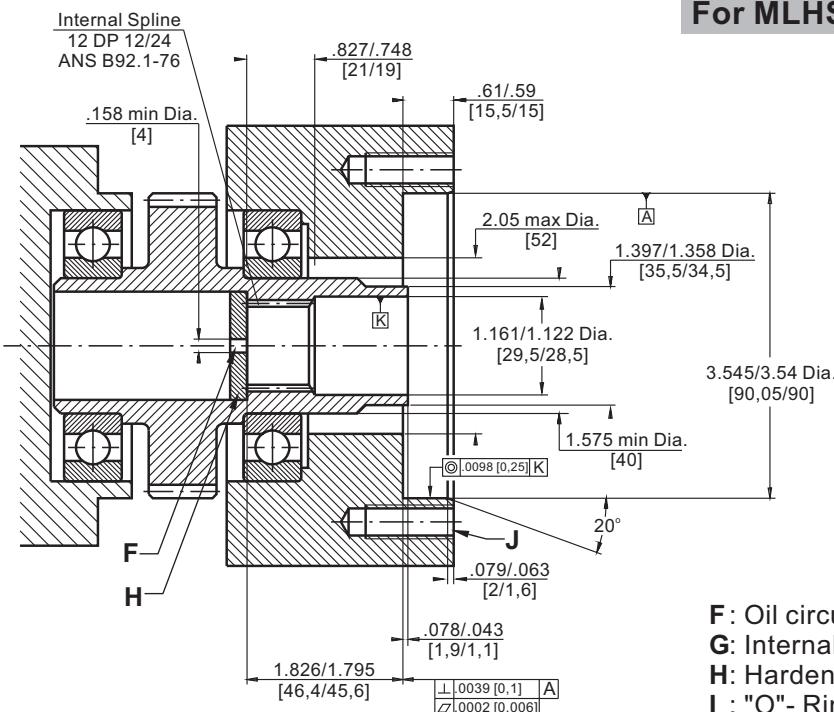

F: Oil circulation hole

G: Internal drain channel



H: Hardened stop plate

I : "O"- Ring 3.346x .079 [85x2]

J : 4xM10 - min 1.024 [26] Deep, 90°, 4.095[104] Dia. B.C.

K: Conical seal ring

For MLHSU

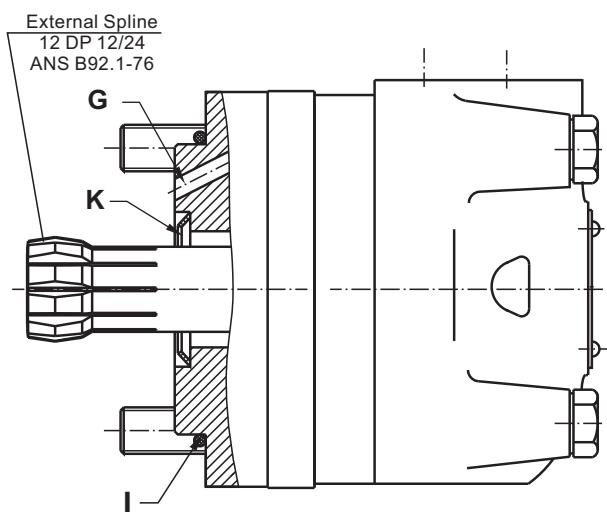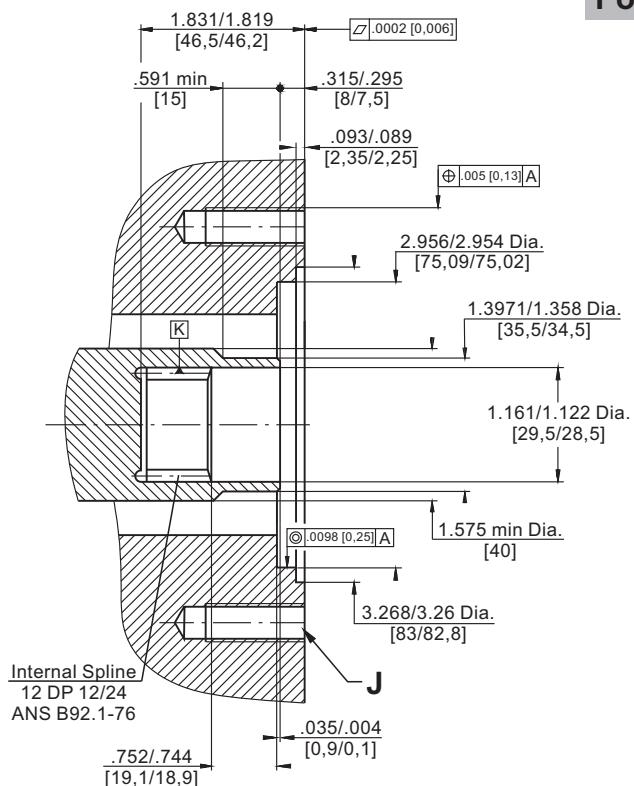

I : "O" - Ring 2.95x .118 [75x3]

J : 4xM10 - min 1.024 [26] Deep, 90°, 4.095[104] Dia. B.C.

G: Internal drain channel

K: Conical seal ring

DRAIN CONNECTION

A drain line has to be used when pressure in the return line can exceed the permissible pressure. It can be connected:


- For MLHSS, MLHSZ at the drain port of the motor;
- For MLHSV, MLHSU at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANS B92.1-1976, class 5
[m=2.1166; corrected x.m=0.8]

Flat Root Side Fit	inch	mm
Number of Teeth z	12	12
Diametral Pitch DP	12/24	12/24
Pressure Angle	30°	30°
Pitch Dia. D	1	25,4
Major Dia. Dri	1.1 ± 1.098	28,0 _{-0,1}
Minor Dia. Di	.907 ± .905	23,0 _{+0,033}
Space Width [Circular] Lo	.1704 ± .1688	4,308±0,020
Fillet Radius R	.008	0,2
Max. Measurement L between Pins	.699 ± .694	17,62 _{+0,15}
Pin Dia. d	.19039±.19031	4,835±0,001

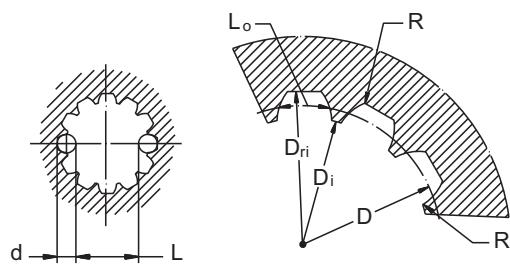

Hardening Specification:
HV=750±50 on the surface.
HV=560 at .035±.019 [0,7±0,2] case depth.
Material: 20 MoCr4 DIN 17210 or SAE8620.

ORDER CODE

1 2 3 4 5 6 7 8

M L H S

Pos.1 - Mounting Flange

- omit - SAE A-4, four holes
- A** - SAE A-2, two holes
- B** - SAE B, two holes
- E** - Wheel mount, 4.25 Pilot Dia.**
- F** - Magneto, four holes (six holes at customer's request)
- S** - Short
- V** - Very short
- U** - Ultra short
- W** - Wheel mount, 5.00 Pilot Dia.
- Z***** - Short, with place for needle bearing
- BD** - With drum brake

Pos.2 - Displacement code

- 80** - 4.91 in³/rev [80,5 cm³/rev]
- 100** - 6.10 in³/rev [100,0 cm³/rev]
- 125** - 7.67 in³/rev [125,7 cm³/rev]
- 160** - 9.74 in³/rev [159,7 cm³/rev]
- 200** - 12.20 in³/rev [200,0 cm³/rev]
- 250** - 15.30 in³/rev [250,0 cm³/rev]
- 315** - 19.20 in³/rev [314,9 cm³/rev]
- 400** - 24.20 in³/rev [397,0 cm³/rev]
- 475** - 28.96 in³/rev [474,6 cm³/rev]
- 525** - 31.88 in³/rev [522,7 cm³/rev]
- 565** - 34.47 in³/rev [564,9 cm³/rev]

NOTES:

- * The permissible output torque for shafts must not be exceeded!
- ** The motor MLHSE is not available with shafts **D, P, SW, SA** and **S**.
- *** MLHSZ is available to max 400 displacement.

The hydraulic motors are mangano-phosphatized as standard.

Pos. 3 - Shaft Extensions*

- omit - for **BD, S, Z, V** and **U** mounting flange
- C** - 1 1/4" [31,75] straight, Parallel key
- D** - 1" [25,4] straight, Parallel key
- G** - 1 1/4" [31,75] 14T Splined
- M** - 32 mm straight, Parallel key
- P** - 34,85 mm Splined, p.t.o. DIN 9611 Form 1
- S** - 1" [25,4] SAE 6B Splined
[Max. Torque 3900 in-lb [44 daNm]]
- SW** - 1" [25,4] SAE 6B Splined
[Max. Torque 3400 in-lb [38 daNm]]
- SA** - 7/8"-13T splined ANS B92.1-1970
- T** - 1 1/4" [31,75] J501 Tapered

Pos. 4 - Actuating Direction [for MLHSBD only]

- /R** - right
- /L** - left

Pos. 5 - Port Size/Type [standard manifold to each]

- 2** - side ports, 2xG1/2, G1/4, BSP thread, ISO 228
- 3** - side ports, 2xM22x1,5; M14x1,5; metric thread, ISO 262
- 4** - side ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF
- 5** - side ports, 2x1/2-14 NPTF, 7/16-20 UNF
- 6** - rear ports, 2xG1/2; G1/4; BSP thread, ISO 228
- 7** - rear ports, 2x7/8-14 UNF, O-ring, 7/16-20 UNF
- 8** - rear ports, 2x1/2-14 NPTF, 7/16-20 UNF
- 9** - rear ports, 2xM22x1,5, M14x1,5; metric thread, ISO 262

Pos. 6 - Shaft Seal Version [see page 12]


- omit - Low pressure seal
- U** - High pressure seal

Pos. 7 - Special Features [see page 58]

Pos. 8 - Design Series



- omit - Factory specified

HYDRAULIC MOTORS MLHT

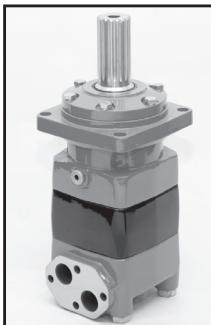

APPLICATION

- » Conveyors
- » Metal working machines
- » Agricultural machines
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles etc.

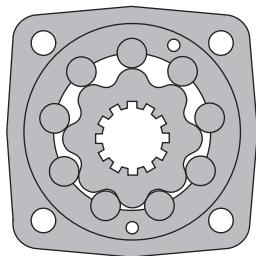

CONTENTS

Specification data	26÷27
Performance data	28÷31
Dimensions and mounting	32÷33
Shaft extensions	34
Permissible shaft seal pressure	34
Dimensions and mounting- MLHTS, V	35
Dimensions of the attached component	36
Internal Spline data	37
Permissible shaft loads	37
Tacho connection.....	38
Order code	38

OPTIONS

- » Model - Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Tacho connection
- » Speed sensoring
- » Side and rear ports
- » Shafts- straight, splined and tapered
- » SAE, Metric and BSPP ports
- » Other special features


GENERAL

Max. Displacement,	in ³ /rev [cm ³ /rev]	44.2 [724,3]
Max. Speed,	[RPM]	775
Max. Torque,	lb-in [daNm]	cont.: 11500 [130] int.: 13100 [148]
Max. Output,	HP [kW]	54 [40]
Max. Pressure Drop,	PSI [bar]	cont.: 2900 [200] int. 3480 [240]
Max. Oil Flow,	GPM [lpm]	39.6 [150]
Min. Speed,	[RPM]	5
Permissible Shaft Loads,	lbs [daN]	P _a =2250 [1000]
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	°F [°C]	-40÷284 [-40÷140]
Optimal Viscosity range,	SUS [mm ² /s]	98÷347 [20÷75]
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm ² /s]	Oil flow in drain line GPM [lpm]
2030 [140]	98 [20]	.660 [2,5]
	164 [35]	.396 [1,5]
3045 [210]	98 [20]	1.321 [5]
	164 [35]	.793 [3]

Pressure Losses

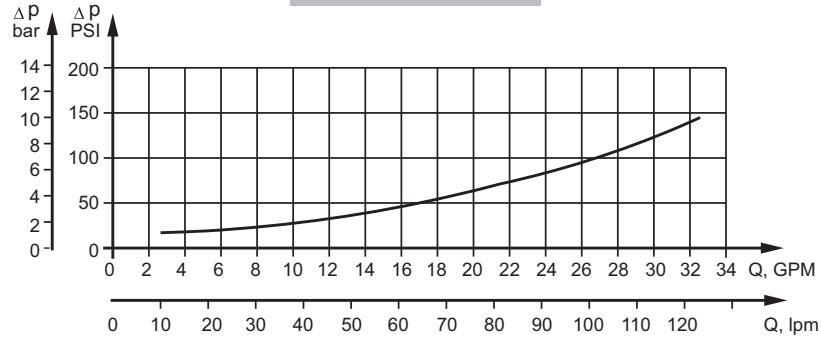

SPECIFICATION DATA

Type	MLHT 160	MLHT 200	MLHT 250	MLHT 315
Displacement, in³/rev [cm³/rev]	9.83 [161,1]	12.29 [201,4]	15.36 [251,8]	19.90 [326,3]
Max. Speed, [RPM]	Cont. Int.*	622 775	620 752	496 601
Max. Torque lb-in [daNm]	Cont. Int.* Peak**	4160 [47] 4960 [56] 5840 [66]	5220 [59] 6285 [71] 7260 [82]	6460 [73] 7790 [88] 9030 [102]
Max. Output HP [kW]	Cont. Int.*	36 [26,5] 43 [32]	45 [33,5] 54 [40]	45 [33,5] 54 [40]
Max. Pressure Drop PSI [bar]	Cont. Int.* Peak**	2900 [200] 3450 [240] 4050 [280]	2900 [200] 3450 [240] 4050 [280]	2900 [200] 3450 [240] 4050 [280]
Max. Oil Flow GPM [lpm]	Cont. Int.*	26.4 [100] 33 [125]	33 [125] 39.6 [150]	33 [125] 39.6 [150]
Max. Inlet Pressure PSI [bar]	Cont. Int.* Peak**	3050 [210] 3600 [250] 4350 [300]	3050 [210] 3600 [250] 4350 [300]	3050 [210] 3600 [250] 4350 [300]
Max. Return Pressure with Drain Line PSI [bar]	Cont. Int.* Peak**	2030 [140] 2540 [175] 3050 [210]	2030 [140] 2540 [175] 3050 [210]	2030 [140] 2540 [175] 3000 [210]
Max. Starting Pressure with Unloaded Shaft, PSI [bar]		150 [10]	150 [10]	150 [10]
Min. Starting Torque lb-in [daNm]	At max. press. drop Cont. At max. press. drop Int.*	3010 [34] 3630 [41]	3800 [43] 4600 [52]	4690 [53] 5580 [63]
Min. Speed***, [RPM]		10	9	8
Weight, lb [kg]	MLHT	44.1 [20]	47.4 [21,5]	46.3 [21]
For Rear Ports +0,450 [.992]	MLHTW MLHTS MLHTV	48.5 [22] 33.1 [15] 24.3 [11]	49.6 [22,5] 34.2 [15,5] 25.4 [11,5]	50.7 [23] 35.3 [16] 26.5 [12]
				48.5 [22] 52.9 [24] 37.5 [17] 28.7 [13]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA (continued)

Type	MLHT 400	MLHT 500	MLHT 630	MLHT 725
Displacement, in³/rev [cm³/rev]	25.06 [410,9]	31.95 [523,6]	38.52 [631,2]	44.2 [724,3]
Max. Speed, [RPM]	Cont. Int.*	304 368	238 289	197 234
Max. Torque lb-in [daNm]	Cont. Int.* Peak**	9560 [108] 11150 [126] 12745 [144]	10800 [122] 12125 [137] 14160 [160]	11500 [130] 13100 [148] 15580 [176]
Max. Output HP [kW]	Cont. Int.*	40 [30] 47 [35]	36 [26,5] 40 [30]	33 [24,3] 37 [27,5]
Max. Pressure Drop PSI [bar]	Cont. Int.* Peak**	2600 [180] 3050 [210] 3450 [240]	2300 [160] 2600 [180] 3050 [210]	2010 [140] 2310 [160] 2760 [190]
Max. Oil Flow GPM [lpm]	Cont. Int.*	33 [125] 39.6 [150]	33 [125] 39.6 [150]	33 [125] 39.6 [150]
Max. Inlet Pressure PSI [bar]	Cont. Int.* Peak**	3050 [210] 3600 [250] 4350 [300]	3050 [210] 3600 [250] 4350 [300]	3050 [210] 3600 [250] 4350 [300]
Max. Return Pressure with Drain Line PSI [bar]	Cont. Int.* Peak**	2000 [140] 2500 [175] 3000 [210]	2000 [140] 2500 [175] 3000 [210]	2000 [140] 2500 [175] 3000 [210]
Max. Starting Pressure with Unloaded Shaft, PSI [bar]		150 [10]	150 [10]	150 [10]
Min. Starting Torque lb-in [daNm]	At max. press. drop Cont. At max. press. drop Int.*	7435 [84] 8585 [97]	8410 [95] 9380 [106]	8410 [95] 9740 [110]
Min. Speed***, [RPM]		6	5	5
Weight, lb [kg]	MLHT	50.7 [23]	52.9 [24]	51.8 [23,5]
For Rear Ports +0,450[.992]	MLHTW MLHTS MLHTV	55.1 [25] 39.7 [18] 30.9 [14]	57.3 [26] 41.9 [19] 33.1 [15]	56.2 [25,5] 40.8 [18,5] 32.0 [14,5]
				54.0 [24,5] 58.4 [26,5] 43.0 [19,5] 34.2 [15,5]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

MLHT 160

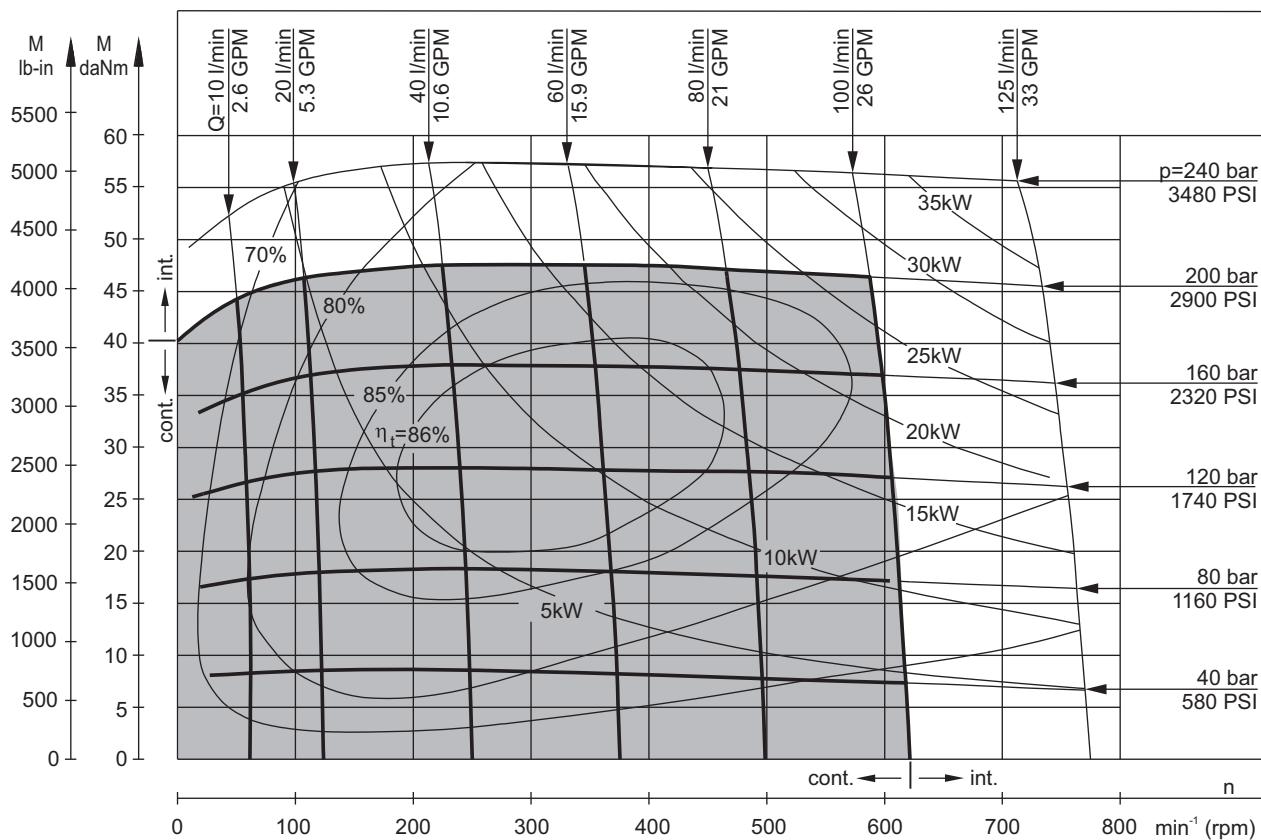


MLHT 200

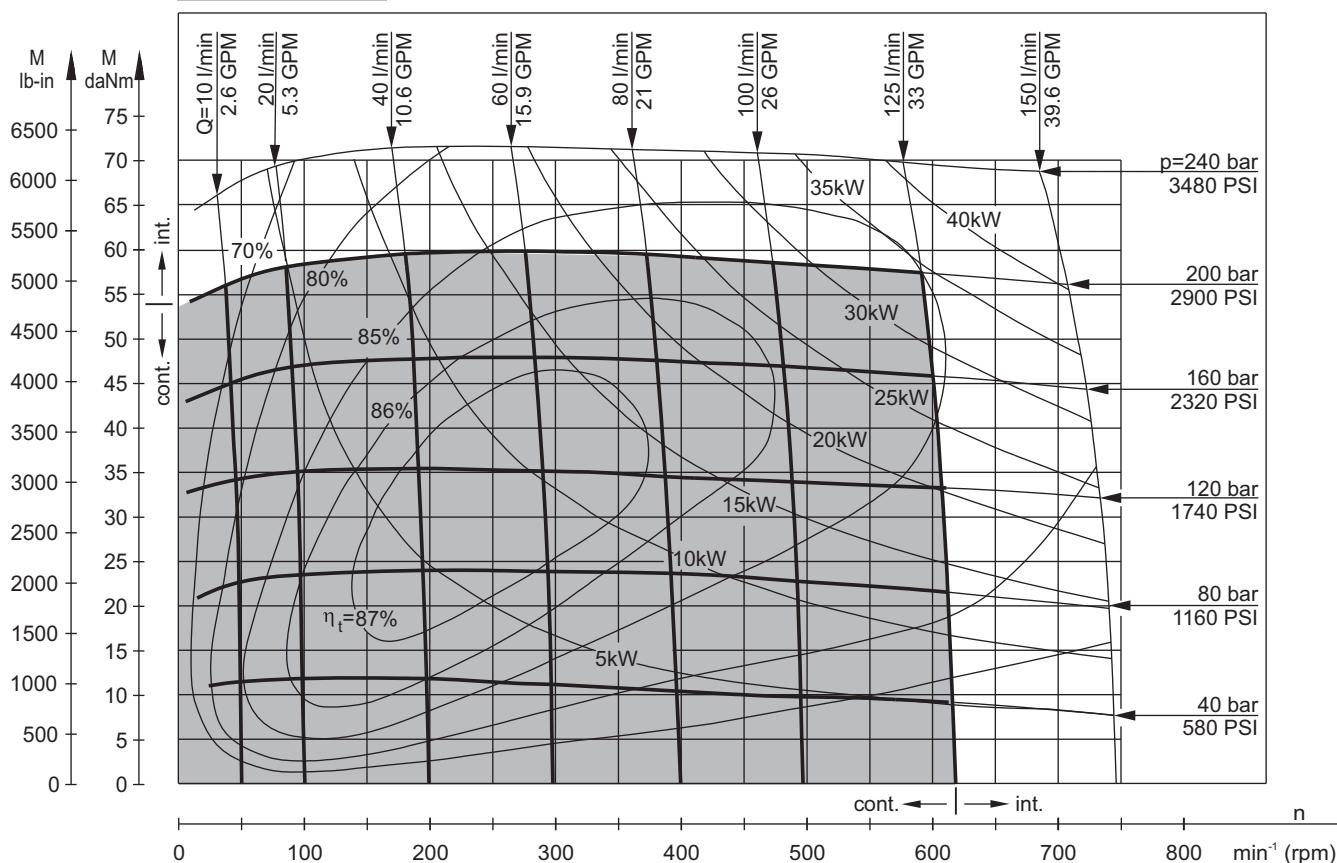


The function diagrams data is for average performance of randomly selected motors at back pressure 5±10 bar [72.5±145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

FUNCTION DIAGRAMS

MLHT 250

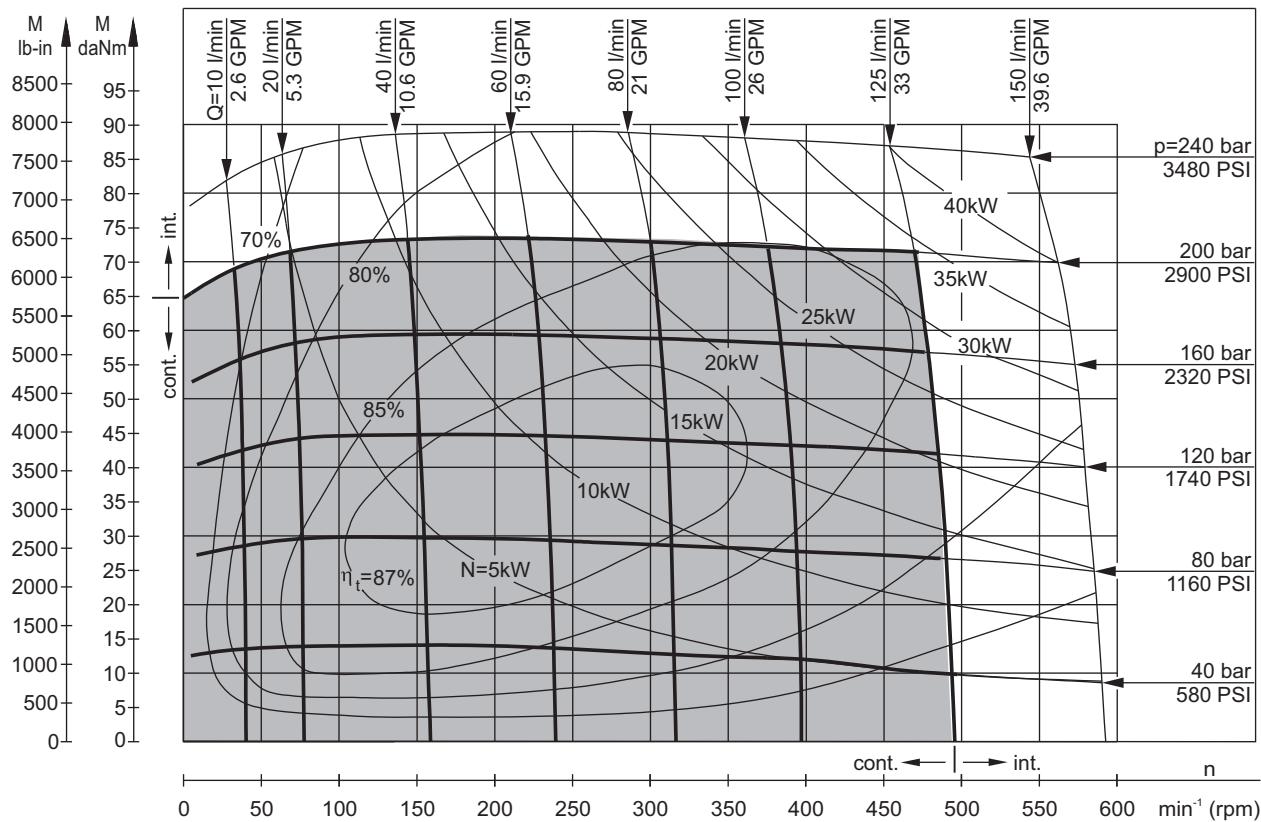


MLHT 315

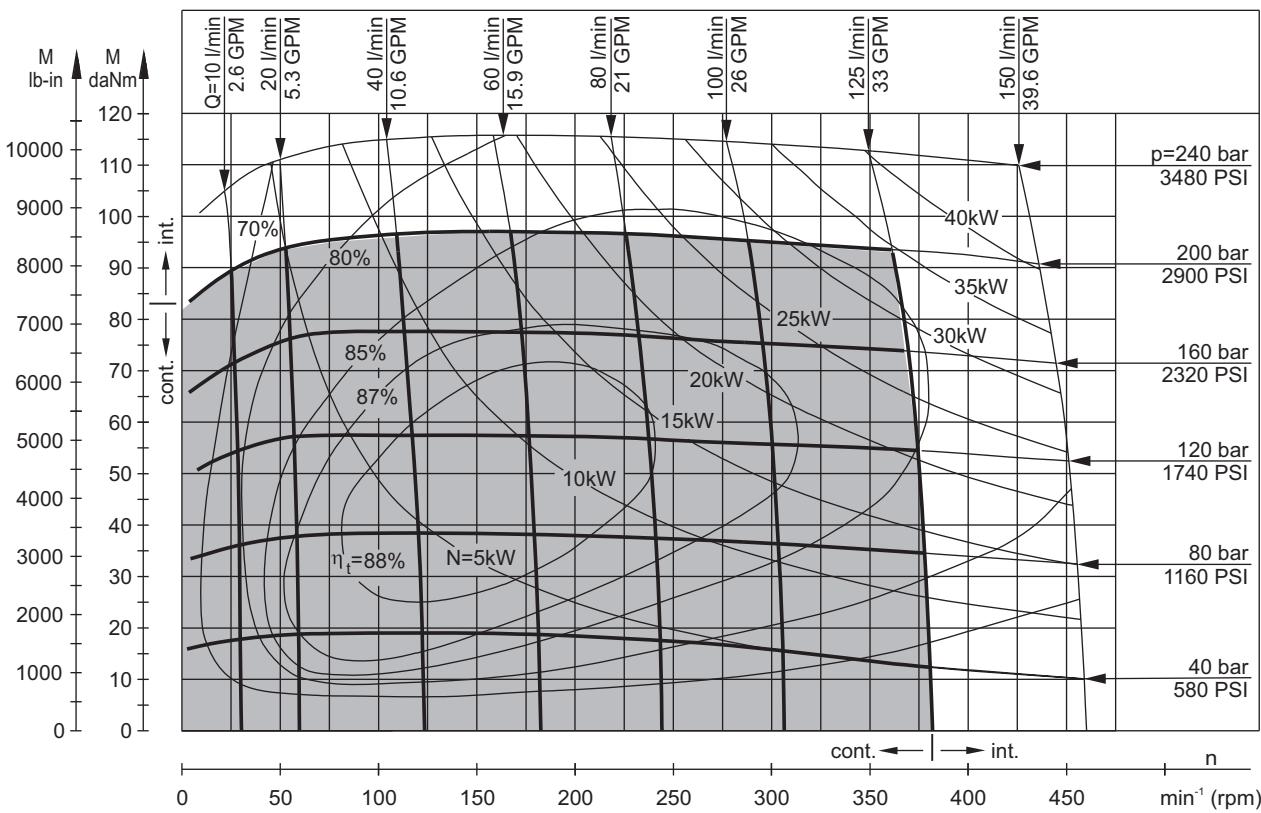


The function diagrams data is for average performance of randomly selected motors at back pressure 5±10 bar [72.5±145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

FUNCTION DIAGRAMS

MLHT 400

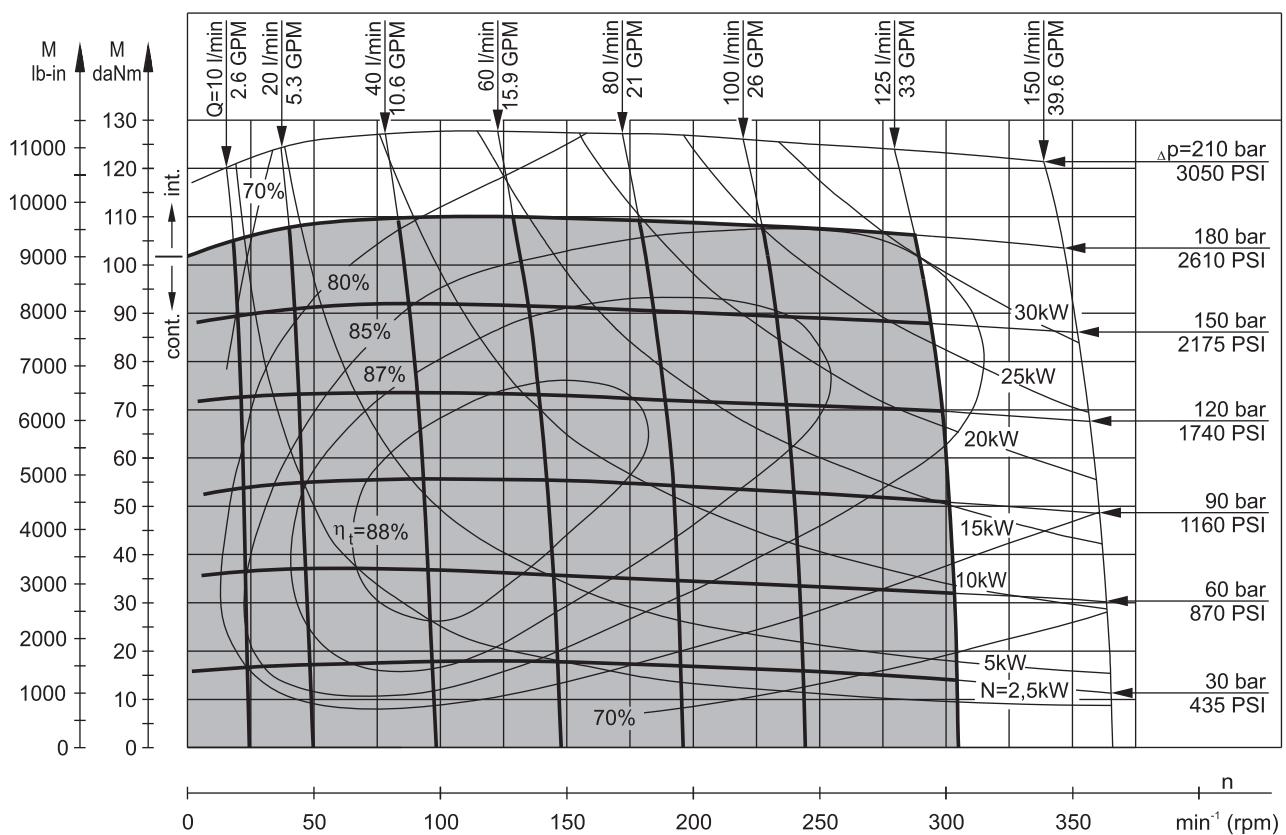


MLHT 500

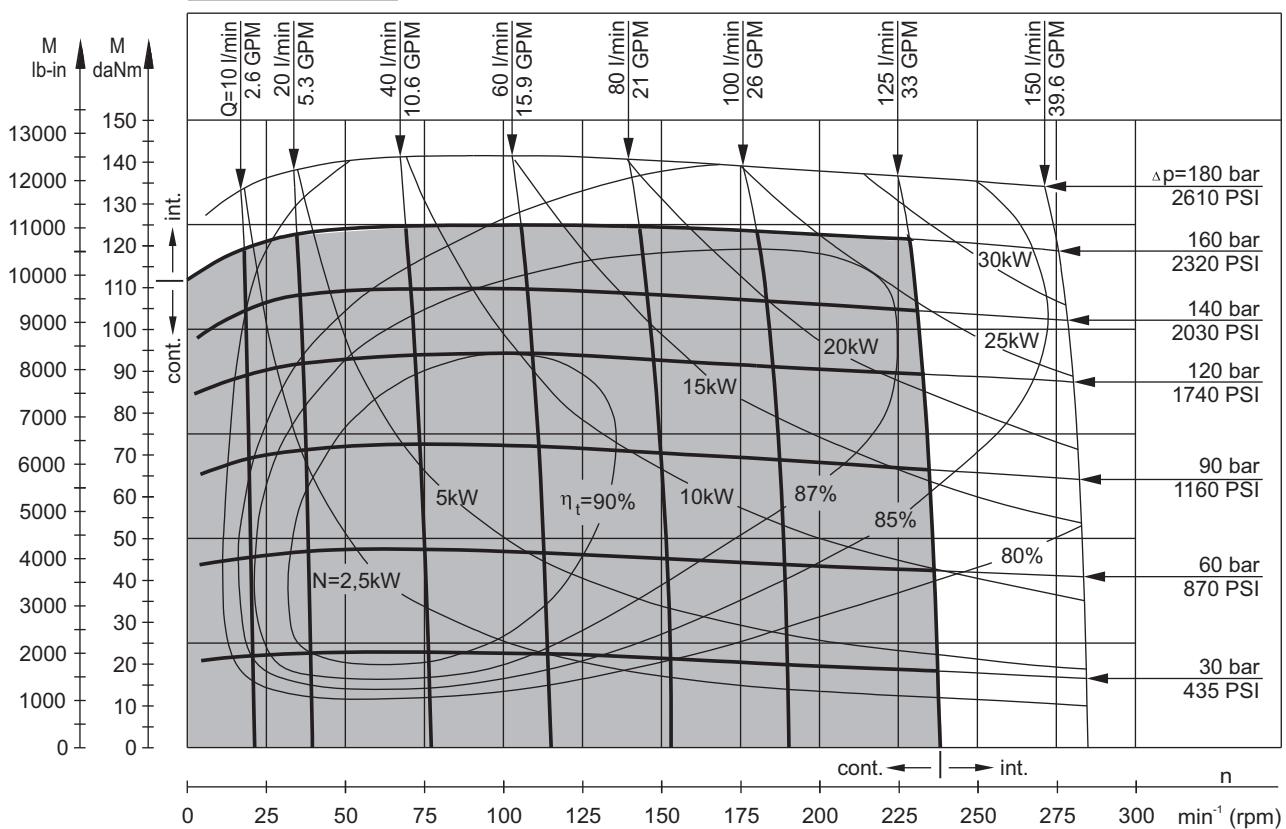


The function diagrams data is for average performance of randomly selected motors at back pressure 5±10 bar [72.5±145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

FUNCTION DIAGRAMS

MLHT 630

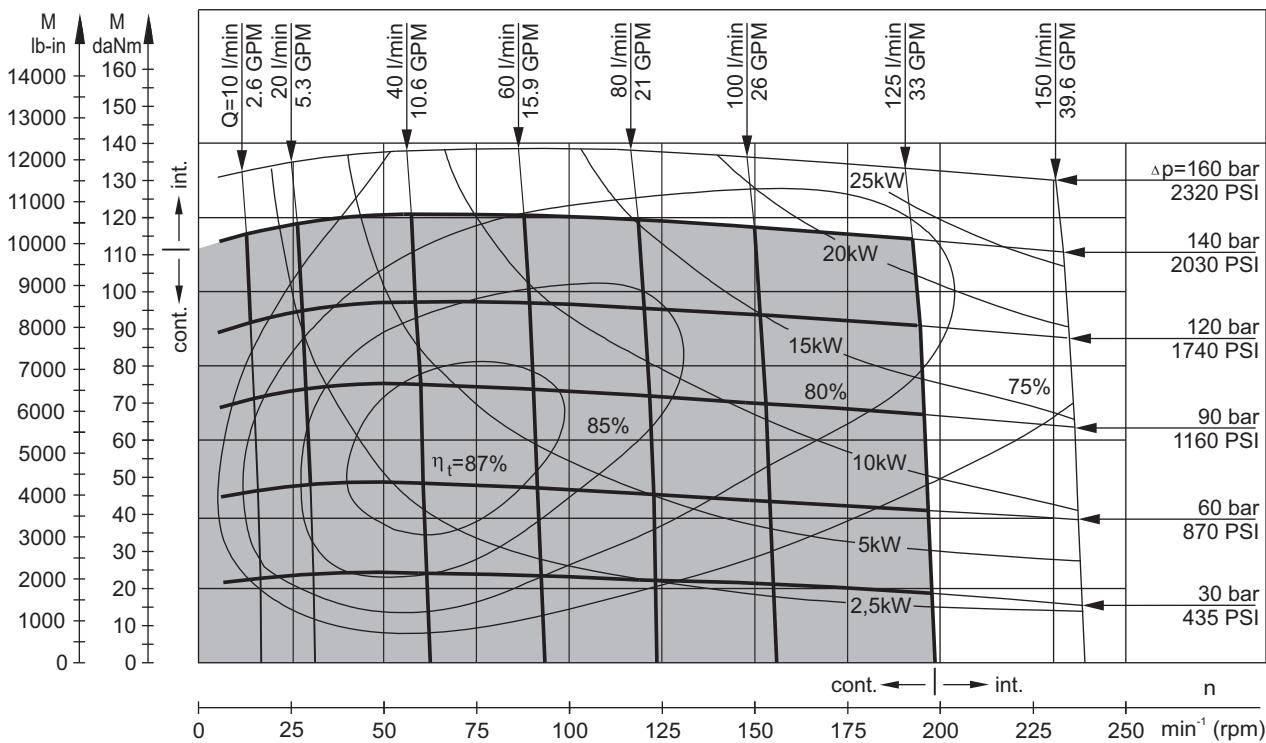


MLHT 725

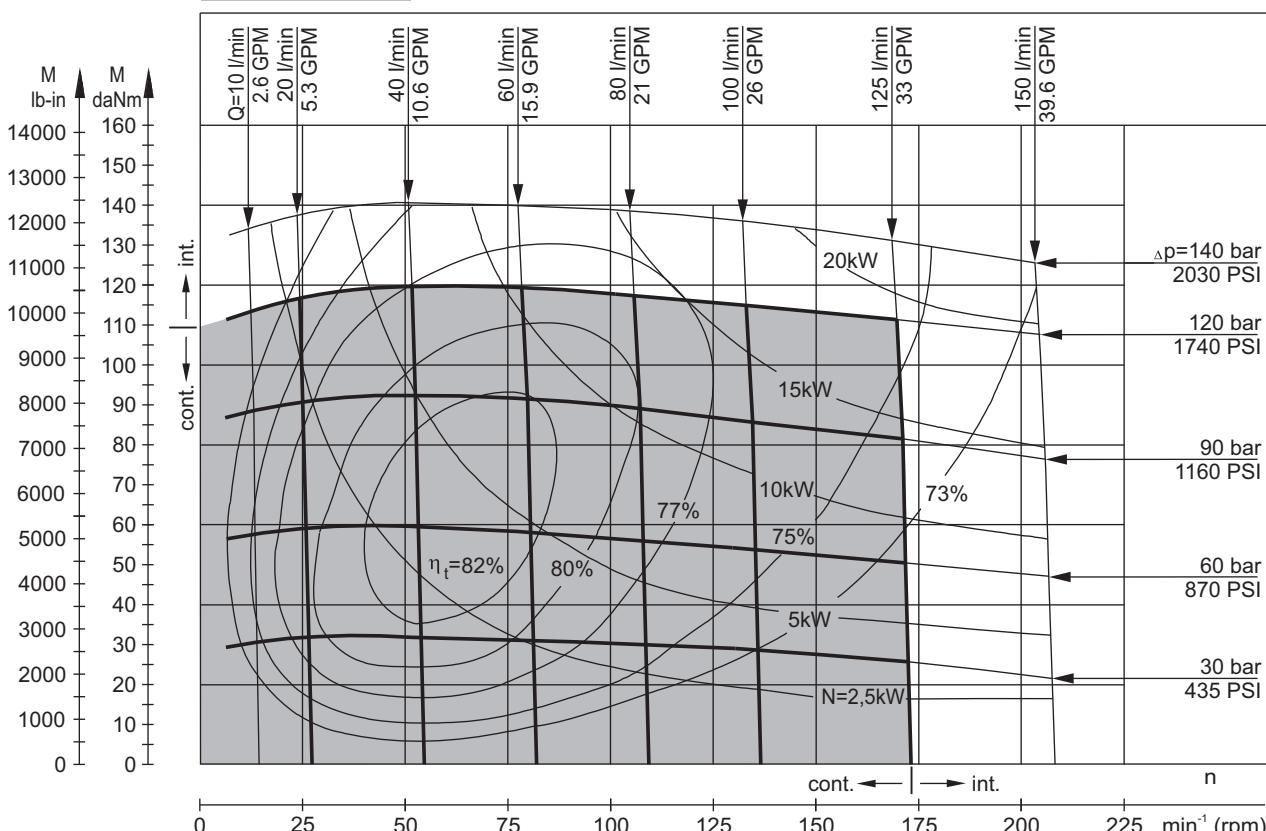


The function diagrams data is for average performance of randomly selected motors at back pressure 5±10 bar [72.5±145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

DIMENSIONS AND MOUNTING DATA

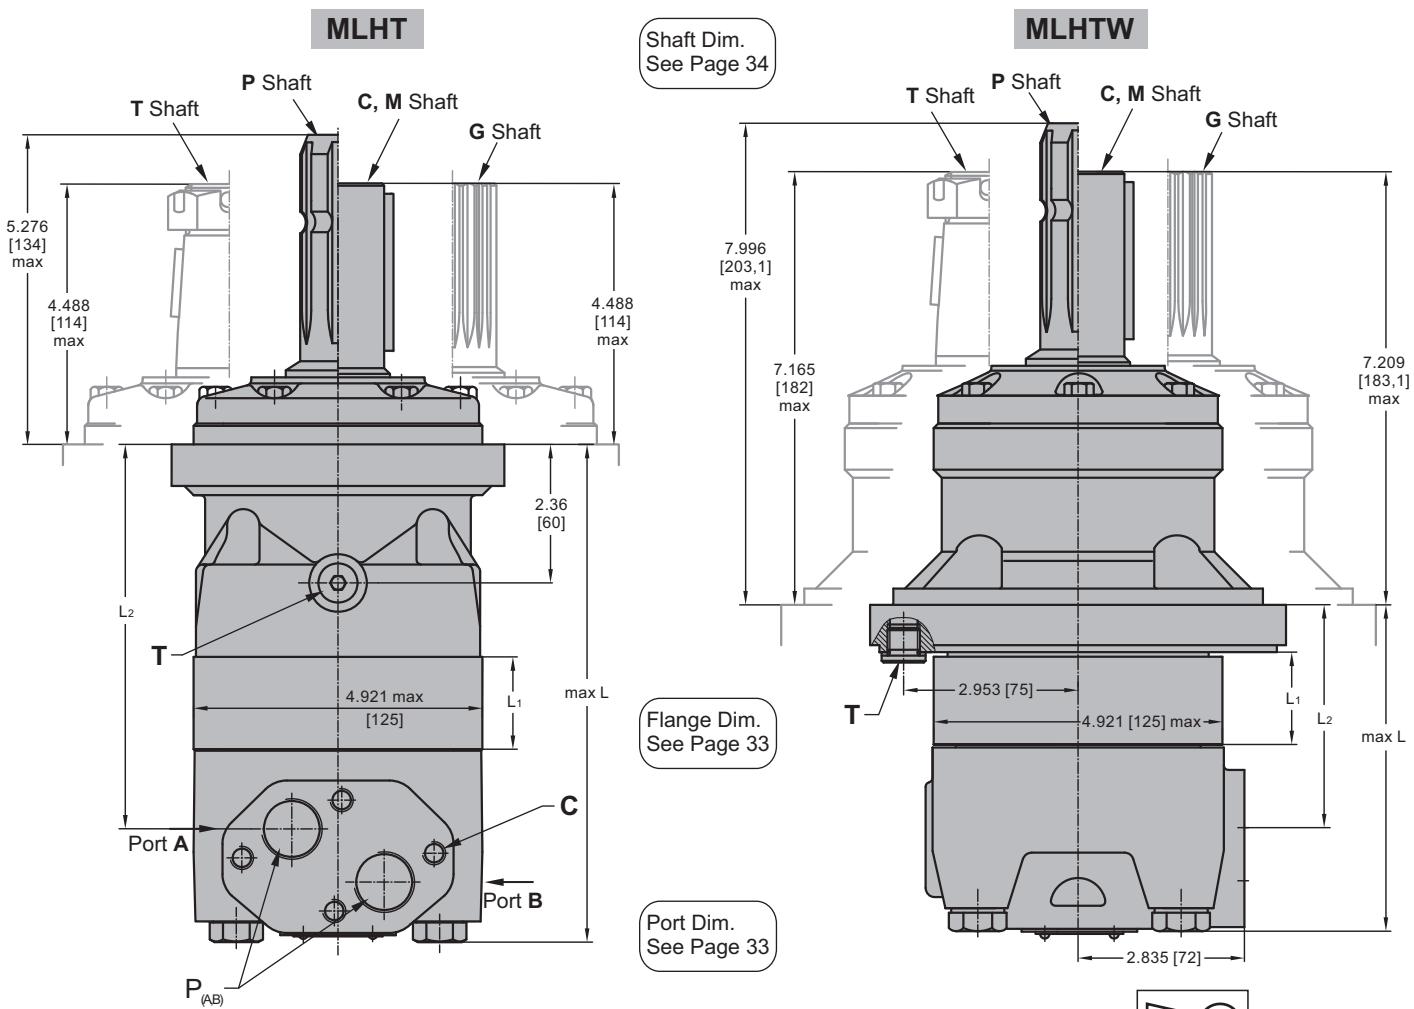

Versions **6 7 9**

Rear ports

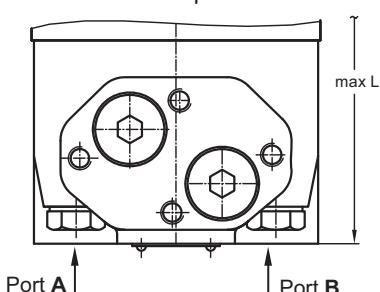

in [mm]

	Versions		
	2,6	3,9	4,7
C	4xM10	4xM10	-
P_(A,B)	2xG ³ / ₄	2xM27x2	2x1 ¹ ₁₆ -12UN
T	G ¹ / ₄	M14x1,5	⁹ ₁₆ -18UNF

Standard Rotation

Viewed from Shaft End

Port **A** Pressurized - **CW**

Port **B** Pressurized - **CCW**

Reverse Rotation

Viewed from Shaft End

Port **A** Pressurized - **CCW**

Port **B** Pressurized - **CW**



Type	L _{max} , in [mm]		L ₂ , in [mm]	Type	L _{max} , in [mm]		L ₂ , in [mm]	**L ₁ , in [mm]
	Versions 2, 3, 4	*Versions 6, 7, 9			Versions 2, 3, 4	*Versions 6, 7, 9		
MLHT 160	7.60 [193,1]	8.00 [203,1]	5.65 [143,5]	MLHTW 160	4.89 [124,1]	5.28 [134,1]	2.93 [74,3]	.65 [16,5]
MLHT 200	7.80 [198,1]	8.19 [208,1]	5.85 [148,5]	MLHTW 200	5.08 [129,1]	5.48 [139,1]	3.12 [79,3]	.85 [21,5]
MLHT 250	8.05 [204,4]	8.44 [214,4]	6.09 [154,8]	MLHTW 250	5.33 [135,4]	5.72 [145,4]	3.37 [85,6]	1.09 [27,8]
MLHT 315	8.41 [213,6]	8.80 [223,6]	6.46 [164,0]	MLHTW 315	5.69 [144,6]	6.09 [154,6]	3.73 [94,8]	1.46 [37,0]
MLHT 400	8.82 [224,1]	9.22 [234,1]	6.87 [174,5]	MLHTW 400	6.11 [155,1]	6.50 [165,1]	4.15 [105,3]	1.87 [47,5]
MLHT 500	9.37 [238,1]	9.77 [248,1]	7.42 [188,5]	MLHTW 500	6.66 [169,1]	7.05 [179,1]	4.70 [119,3]	2.42 [61,5]
MLHT 630	9.22 [234,1]	9.61 [244,1]	7.26 [184,5]	MLHTW 630	6.50 [165,1]	6.89 [175,1]	4.54 [115,3]	2.26 [57,5]
MLHT 725	9.57 [243,1]	9.96 [253,1]	7.62 [193,5]	MLHTW 725	6.85 [174,1]	7.25 [184,1]	4.89 [124,3]	2.62 [66,5]

* - For Rear Ported Motors.



** - The width of the roll-gerotor is .138 in [3,5 mm] greater than L₁.

MOUNTING

SAE C Flange

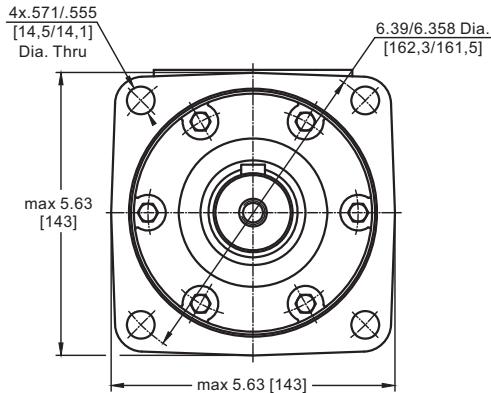
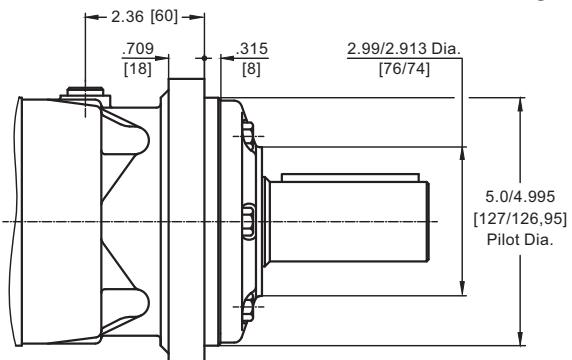


W Wheel Mount

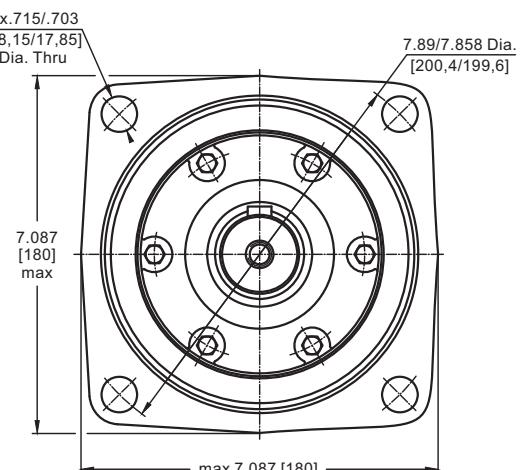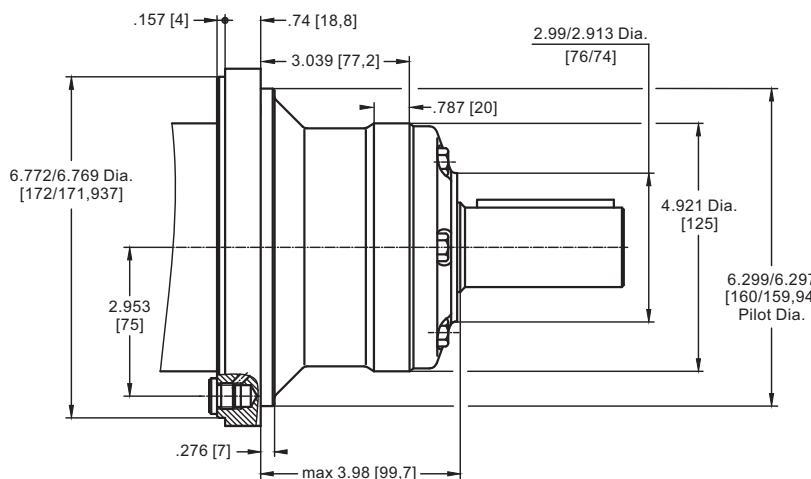


PORTS

Versions **2** **3** **4**
Side ports

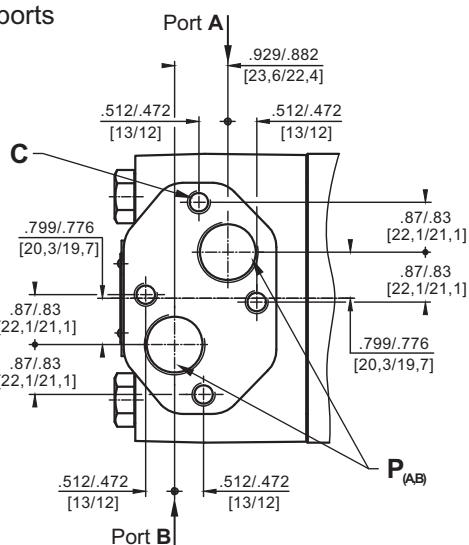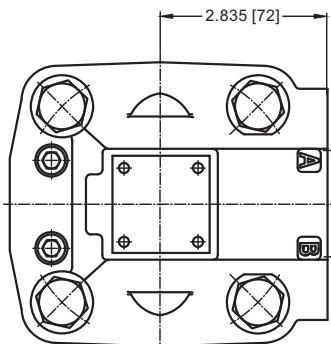

Versions **6** **7** **9**
Rear ports

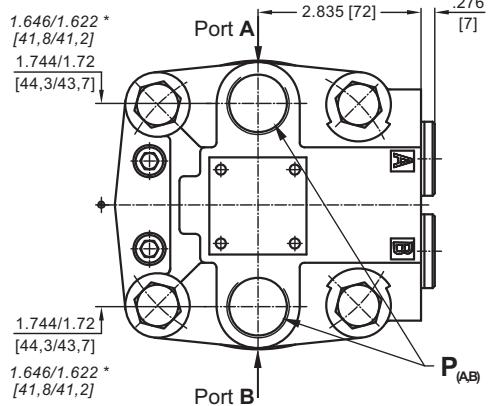

* For Version 7 only!

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

	Versions		
	2,6	3,9	4,7
C	4xM10	4xM10	-
P _(A,B)	2xG ³ / ₄	2xM27x2	2x1 ¹ / ₁₆ -12UN
T	G ¹ / ₄	M14x1,5	⁹ / ₁₆ -18UNF


in [mm]



SHAFT EXTENSIONS


C

1½" [38,1] straight, Parallel key ¾"x ¾"x 2¼" BS46
Max. Torque 11750 lb-in [133 daNm]

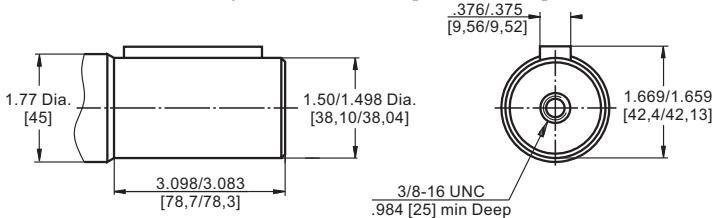


G

17T Splined, 1½" [38,1] ANS B92.1-1976
Max. Torque 11750 lb-in [133 daNm]

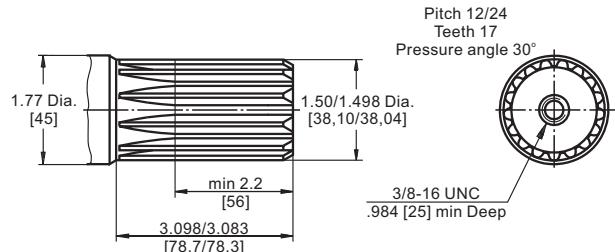


M

ø40 straight, Parallel key A12x8x70 DIN 6885
Max. Torque 11750 lb-in [133 daNm]

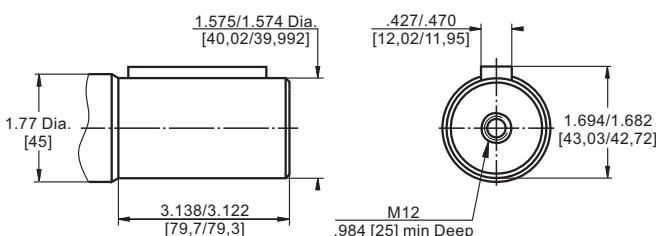


T

SAE J501 Tapered 1:8
Parallel key 7/16"x7/16"x 1¼ " BS46
Max. Torque 18650 lb-in [210 daNm]

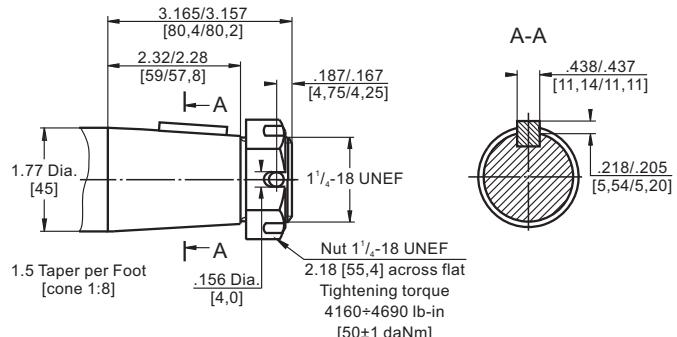

P


ø34,85 p.t.o. DIN 9611 Form 1
Max. Torque 6815 lb-in [77 daNm]

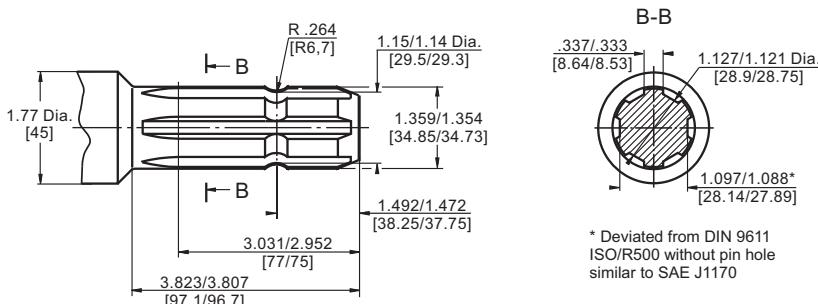

Required max. Torque
must not be exceeded.

MAX. PERMISSIBLE SHAFT SEAL PRESSURE

Max. return pressure without drain line or
max. pressure in the drain line

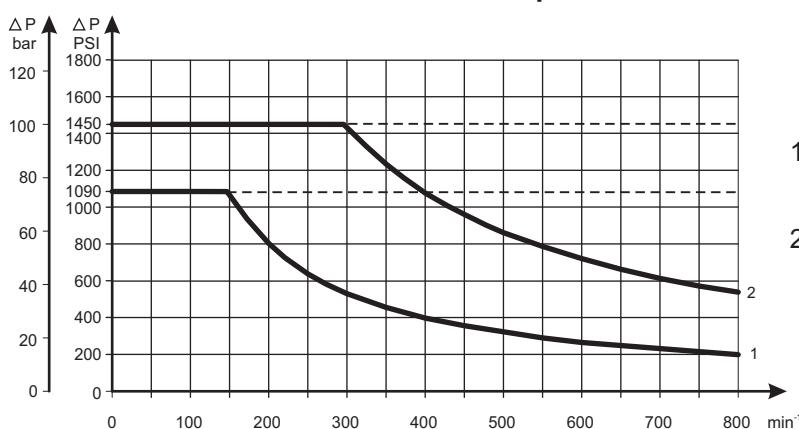


1: Drawing for Standard Shaft Seal

2: Drawing for High Pressure Seal ("U" Seal)


— continuous operations
- - - - - intermittent operations

DIMENSIONS AND MOUNTING DATA - MLHTS and MLHTV




S Short Mount

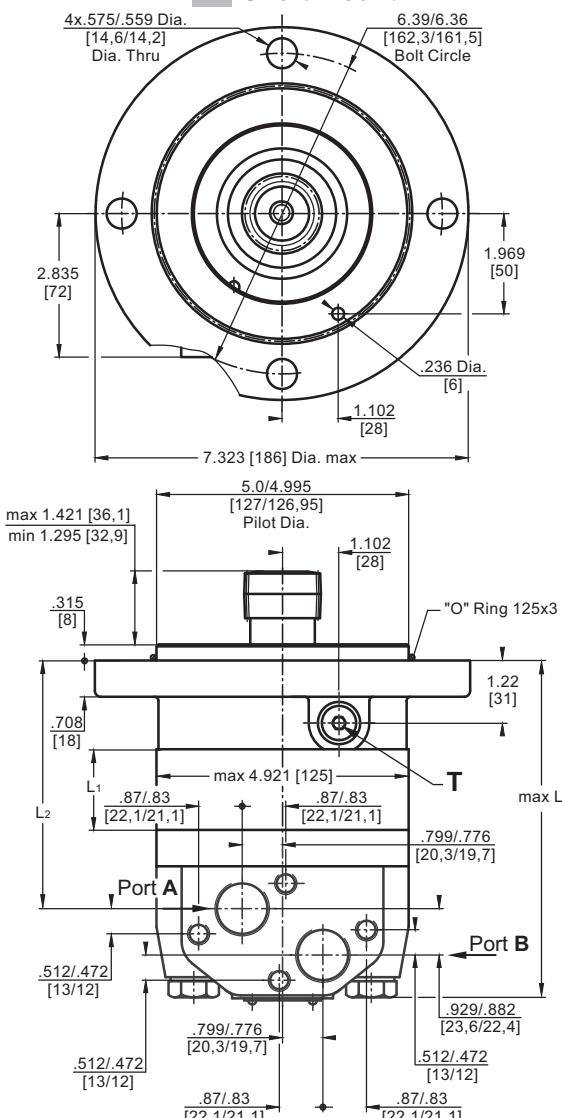

Versions **6 7 9**

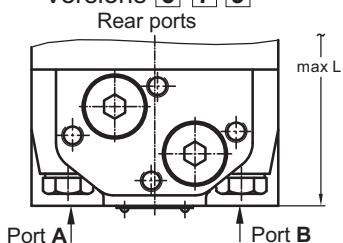

V Very Short Mount

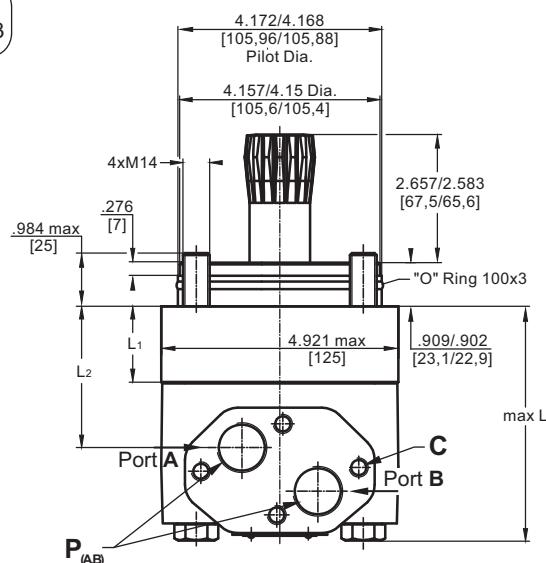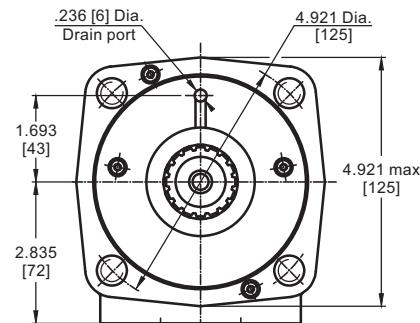

in [mm]

Standard Rotation

Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

	Versions		
	2, 6	3, 9	4, 7
C	4xM10	4xM10	-
P (A,B)	2xG ³ / ₄	2xM27x2	2x1 ¹ ₁₆ -12UN
T	G ¹ / ₄	M14x1,5	⁹ ₁₆ -18UNF

Type	L max, in [mm]			Type	L max, in [mm]				
	Versions 2, 3, 4	*Versions 6, 7, 9	L ₂ , in [mm]		**L ₁ , in [mm]	Versions 2, 3, 4	*Versions 6, 7, 9	L ₂ , in [mm]	**L ₁ , in [mm]
MLHTS 160	5.90 [150]	6.10 [155]	4.07 [103,6]	.79 [20,0]	MLHTV 160	3.97 [100,8]	4.36 [110,8]	2.02 [51,5]	.65 [16,5]
MLHTS 200	6.10 [155]	6.30 [160]	4.27 [108,5]	.98 [25,0]	MLHTV 200	4.17 [105,8]	4.56 [115,8]	2.22 [56,5]	.85 [21,5]
MLHTS 250	6.34 [161]	6.57 [167]	4.52 [114,8]	1.23 [31,3]	MLHTV 250	4.41 [112,1]	4.81 [122,1]	2.47 [62,8]	1.09 [27,8]
MLHTS 315	6.69 [170]	6.93 [176]	4.88 [124,0]	1.59 [40,5]	MLHTV 315	4.76 [121,3]	5.17 [131,3]	2.83 [72,0]	1.46 [37,0]
MLHTS 400	7.13 [181]	7.32 [186]	5.30 [134,5]	2.01 [51,0]	MLHTV 400	5.19 [131,8]	5.58 [141,8]	3.25 [82,5]	1.87 [47,5]
MLHTS 500	7.68 [195]	7.87 [200]	5.85 [148,5]	2.56 [65,0]	MLHTV 500	5.74 [145,8]	6.13 [155,8]	3.80 [96,5]	2.42 [61,5]
MLHTS 630	7.52 [191]	7.72 [196]	5.69 [144,5]	2.40 [61,0]	MLHTV 630	5.58 [141,8]	5.98 [151,8]	3.64 [92,5]	2.26 [57,5]
MLHTS 725	7.87 [200]	8.07 [205]	6.04 [153,5]	2.76 [70,0]	MLHTV 725	5.94 [150,8]	6.33 [160,8]	4.00 [101,5]	2.62 [66,5]


* - For Rear Ported Motors.

** - The width of the roll-gerotor is .138 in. [3.5 mm] greater than L₁.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANS B92.1-1976, class 5
[$m=2.1166$; corrected $x.m=1$]

Flat Root Side Fit	inch	mm
Number of Teeth z	16	16
Diametral Pitch DP	12/24	12/24
Pressure Angle	30°	30°
Pitch Dia. D	1.3333	33,8656
Major Dia. Dri	$1.5118 \div 1.5275$	$38,4^{+0,4}$
Minor Dia. Di	$1.2657 \div 1.2673$	$32,15^{+0,04}$
Space Width [Circular] Lo	$.1763 \div .1791$	$4,516 \pm 0,037$
Fillet Radius R	.02	0,5
Max. Measurement between Pins L	$1.063 \div 1.059$	$26,9^{+0,10}$
Pin Dia. d	$.19026 \div .19034$	$4,835 \pm 0,001$

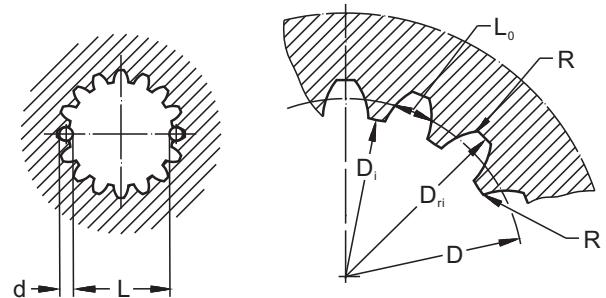


Hardening Specification:
HV=750±50 on the surface.
HV=560 at .035÷.019 [0,7±0,2] case depth
Material: 20 MoCr4 EN 10084 or SAE8620.


PERMISSIBLE SHAFT LOADS

The output shaft runs in tapered bearings that permit high axial and radial forces. The permissible radial load on the shaft is shown for an axial load of 0 N as function of the distance from the mounting flange to the point of load application. The curves apply to a B10 bearing life of 2000 hours at 100 RPM.

Curve "1" shows max. radial shaft load. Any shaft load exceeding the values shown by the curve will seriously reduce motor life.

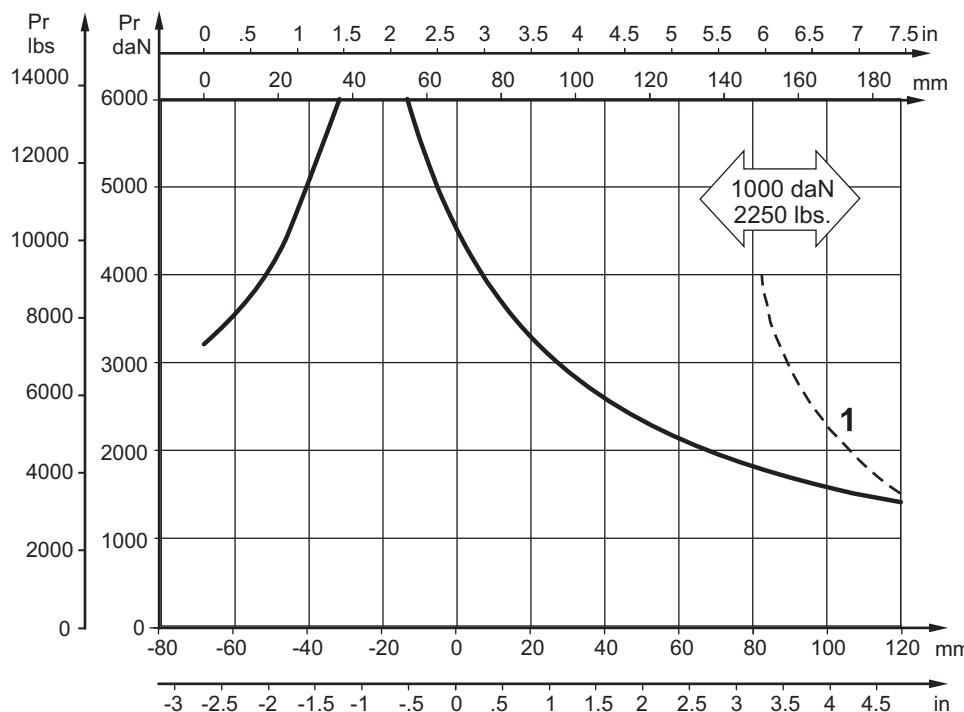


Mounting Flange:

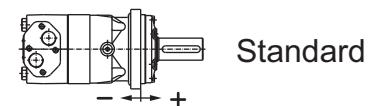

DIMENSIONS OF THE ATTACHED COMPONENT

For MLHTS

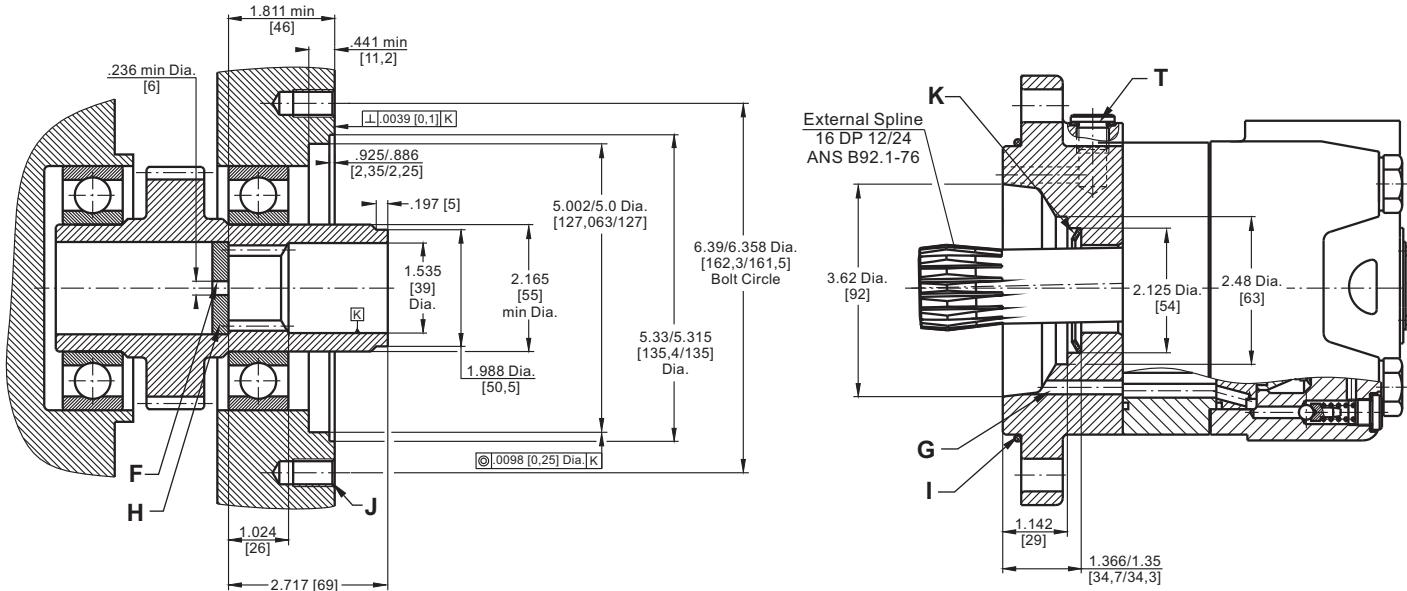

F: Oil circulation hole

G: Internal drain channel

H: Hardened stop plate


I : O-ring 4.921x.118 [125x3]

J : 4x1/2 UN; .71 [18] deep, 90°, 6.375 [162] Dia. B.C.

K: Conical seal ring

T: Drain connection G1/4. M14x1,5 or 9/16-18 UNF

For MLHTV

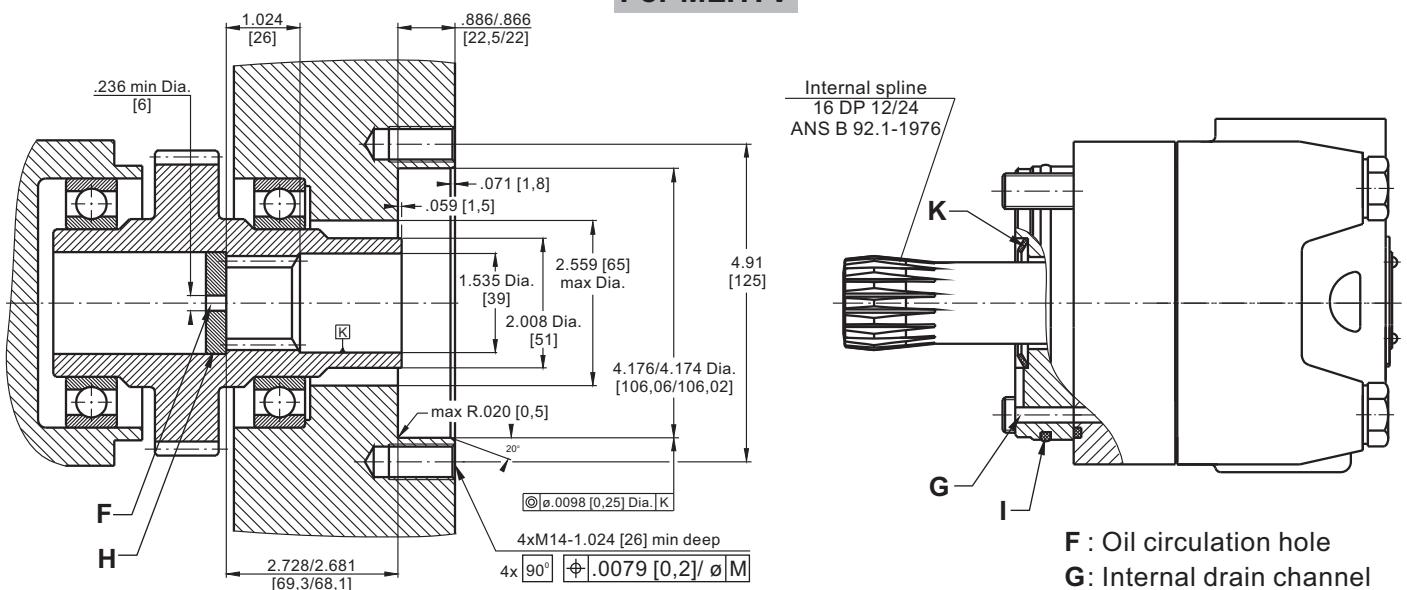

F : Oil circulation hole

G: Internal drain channel

H: Hardened stop plate

I : O-ring 3.94x.118 [100x3]

K: Conical seal ring


DRAIN CONNECTION

A drain line has to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For MLHTS at the drain port of the motor;
- For MLHTV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

MOTORS WITH TACHO CONNECTION

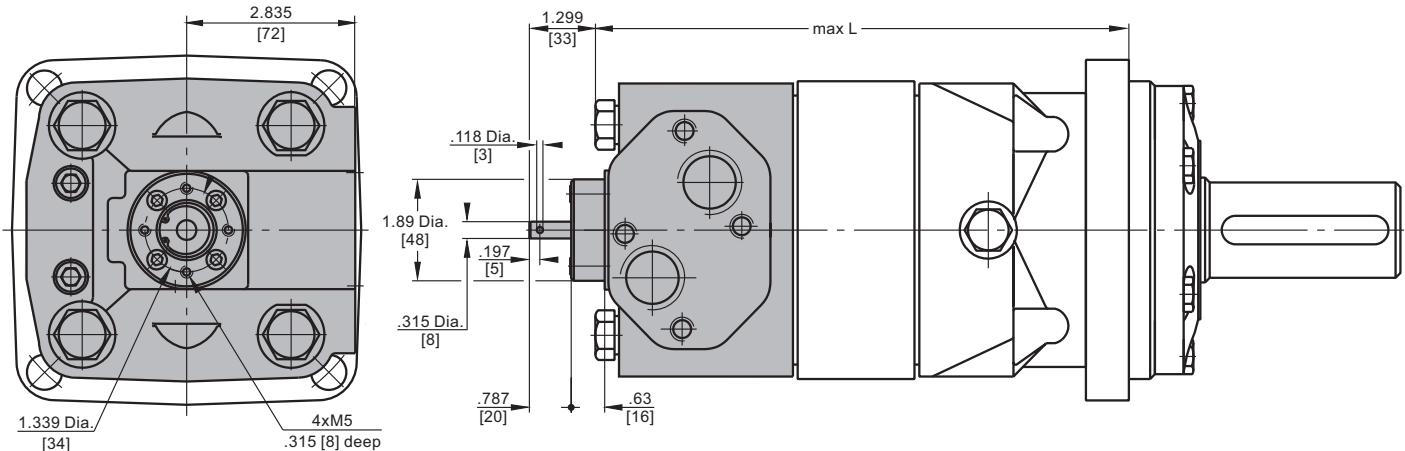

ORDER CODE

M	L	H	T	1	2	3	4	5	6	7
----------	----------	----------	----------	---	---	---	---	---	---	---

Pos.1 - Mounting Flange

omit - SAE C, four holes

S - Short

V - Very short

W - Wheel mount

Pos.2 - Displacement code

160 - 9.83 in³/rev [61,6 cm³/rev]

200 - 12.29 in³/rev [201,4 cm³/rev]

250 - 15.36 in³/rev [251,8 cm³/rev]

315 - 19.90 in³/rev [326,3 cm³/rev]

400 - 25.06 in³/rev [410,9 cm³/rev]

500 - 31.95 in³/rev [523,6 cm³/rev]

630 - 38.52 in³/rev [631,2 cm³/rev]

725 - 44.20 in³/rev [724,3 cm³/rev]

Pos.3 - Shaft Extensions*

omit - for **S** and **V** mounting flange

C - 1 1/2" [38,10] straight, Parallel key

G - 1 1/2" [38,10] 17T Splined

M - 40 mm straight, Parallel key

P - 34,85 mm Splined, p.t.o. DIN 9611 Form 1

T - 1 3/4" [44,50] J501 Tapered

Pos.4 - Port Size/Type [standard manifold to each]

2 - side ports, 2xG 3/4, G 1/4, BSP thread, ISO 228

3 - side ports, 2xM27x2; M14x1,5; metric thread, ISO 262

4 - side ports, 2x 1 1/16 12 UN, O-ring, 1/16-18 UNF

6 - rear ports, 2xG 3/4, G 1/4; BSP thread, ISO 228

7 - rear ports, 2x 1 1/16 12 UN, O-ring, 1/16-18 UNF

9 - rear ports, 2xM27x2; M14x1,5; metric thread, ISO 262

Pos.5 - Shaft Seal Version [see page 34]

omit - Low pressure seal

U - High pressure seal

Pos.6 - Special Features [see page 58]

Pos.7 - Design Series

omit - Factory specified

NOTES:

* The permissible output torque for shafts must not be exceeded!

Version 7 is not applicable at S (Short) motors.



The hydraulic motors are mangano-phosphatized as standard.

HYDRAULIC MOTORS MLHV



APPLICATION

- » Conveyors
- » Metal working machines
- » Agricultural machines
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles
- » Plastic and rubber machinery etc.

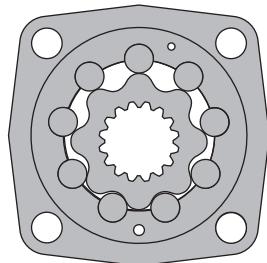

CONTENTS

Specification data	40
Performance data	41÷43
Permissible shaft loads	43
Dimensions and mounting MLHV, C, W.....	44÷46
Dimensions and mounting- MLHVS.....	47
Dimensions and mounting- MLHVV.....	48
Internal Spline data	49
Tacho connection.....	49
Shaft extensions	50
Order code	50

OPTIONS

- » Model - Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Tacho connection
- » Speed sensoring
- » Side ports
- » Shafts - straight, splined and tapered
- » SAE and BSPP ports
- » Other special features


GENERAL

Max. Displacement,	in ³ /rev [cm ³ /rev]	48.91 [801,8]
Max. Speed,	[RPM]	630
Max. Torque,	lb-in [daNm]	cont.: 16650 [188] int.: 18650 [211]
Max. Output,	HP [kW]	85,8 [64]
Max. Pressure Drop,	PSI [bar]	cont.: 2900 [200] int.: 3480 [240]
Max. Oil Flow,	GPM [lpm]	63.4 [240]
Min. Speed,	[RPM]	5
Permissible Shaft Loads	lbs [daN]	P _a =3300 [1500]
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	°F [°C]	-40÷284 [-40÷140]
Optimal Viscosity range, SUS	[mm ² /s]	98÷347 [20÷75]
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm ² /s]	Oil flow in drain line GPM [lpm]
2030 [140]	98 [20]	.793 [3]
	164 [35]	.528 [2]
3045 [210]	98 [20]	.1.585 [6]
	164 [35]	1.057 [4]

Pressure Losses

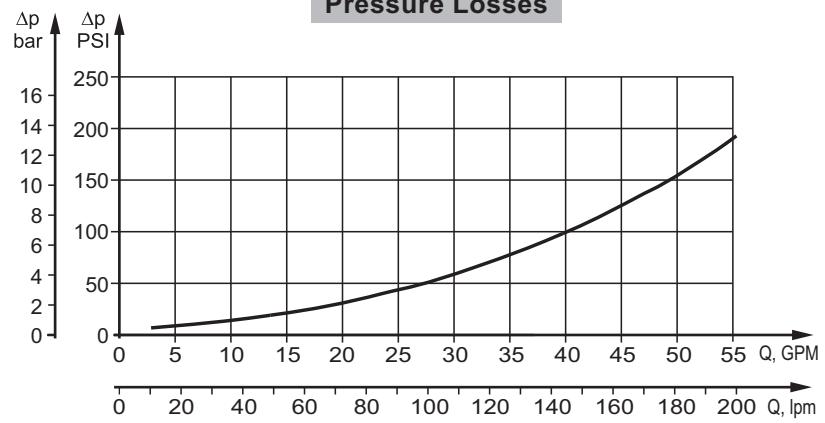

SPECIFICATION DATA

Type	MLHV 315	MLHV 400	MLHV 500	MLHV 630	MLHV 800
Displacement, in³/rev [cm³/rev]	19.18 [314,5]	24.45 [400,9]	30.48 [499,6]	38.38 [629,1]	48.91 [801,8]
Max. Speed, [RPM]	Cont. Int.*	510 630	500 600	400 480	320 380
Max. Torque lb-in [daNm]	Cont. Int.* Peak**	8150 [92] 9800 [111] 11400 [129]	10450 [118] 12500 [141] 14500 [164]	12950 [146] 15550 [176] 18150 [205]	14700 [166] 17150 [194] 19550 [221]
Max. Output HP [kW]	Cont. Int.*	57 [42,5] 68,4 [51]	71.7 [53,5] 85.8 [64]	71.7 [53,5] 85.8 [64]	64.4 [48] 75 [56]
Max. Pressure Drop PSI [bar]	Cont. Int.* Peak**	2900 [200] 3480 [240] 4060 [280]	2900 [200] 3480 [240] 4060 [280]	2900 [200] 3480 [240] 4060 [280]	2600 [180] 3050 [210] 3480 [240]
Max. Oil Flow GPM [lpm]	Cont. Int.*	42.3 [160] 52.8 [200]	52.8 [200] 63.4 [240]	52.8 [200] 63.4 [240]	52.8 [200] 63.4 [240]
Max. Inlet Pressure PSI [bar]	Cont. Int.* Peak**	3050 [210] 3620 [250] 4350 [300]			
Max. Return Pressure with Drain Line PSI [bar]	Cont. Int.* Peak**	2040 [140] 2540 [175] 3050 [210]			
Max. Starting Pressure with Unloaded Shaft, PSI [bar]		120 [8]	120 [8]	120 [8]	120 [8]
Min. Starting Torque lb-in [daNm]	At max. press. drop Cont. At max. press. drop Int.*	6300 [71] 7500 [85]	8100 [91] 9600 [109]	10000 [113] 12000 [136]	11800 [133] 13700 [155]
Min. Speed***, [RPM]		10	10	10	10
Weight, lb [kg]	MLHV MLHVV MLHVS	67.7 [30,7] 69.2 [31,4] 49.2 [22,3]	69.5 [31,5] 71.0 [32,2] 50.9 [23,1]	71.4 [32,4] 73.0 [33,1] 52.9 [24,0]	74.1 [33,6] 75.6 [34,3] 55.6 [25,2]
					77.6 [35,2] 79.2 [35,9] 59.1 [26,8]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

MLHV 315

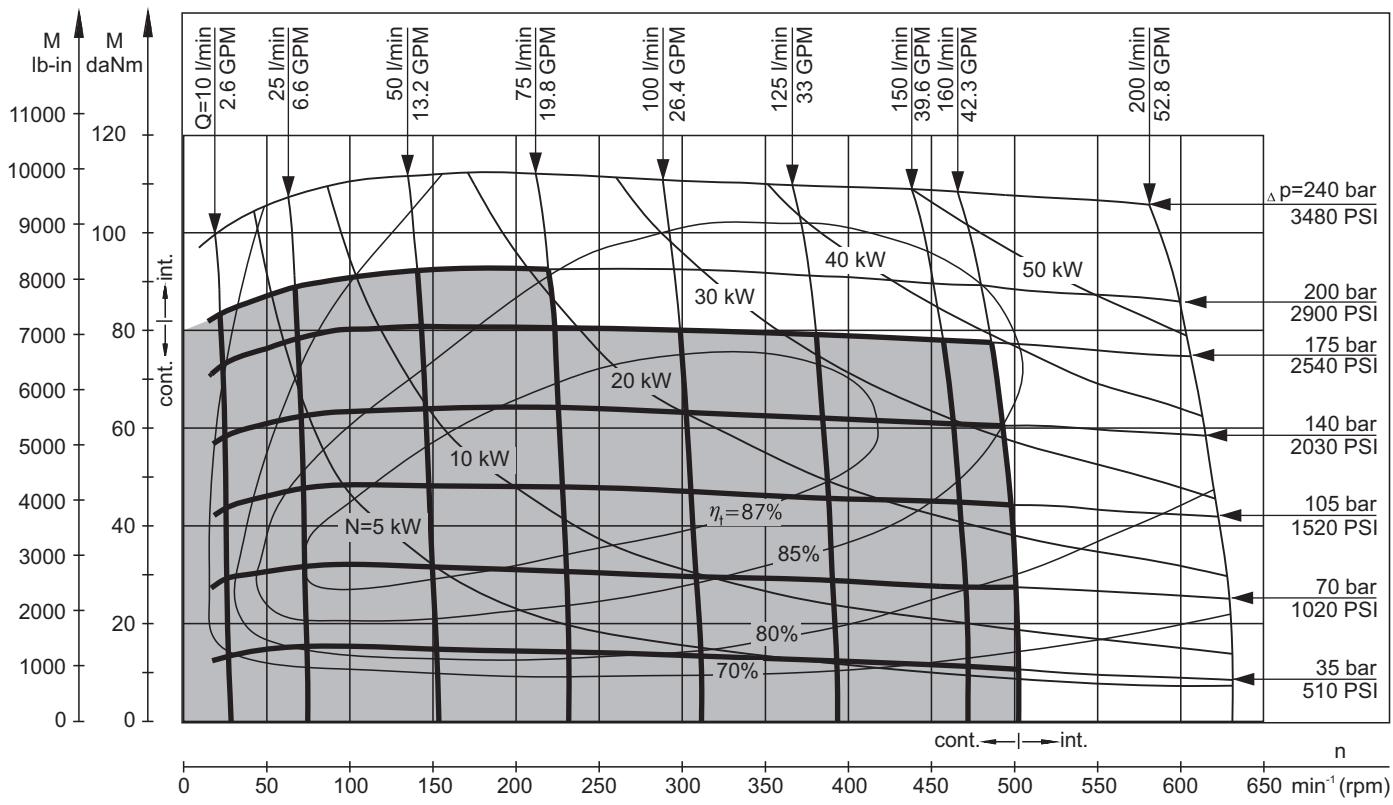


MLHV 400

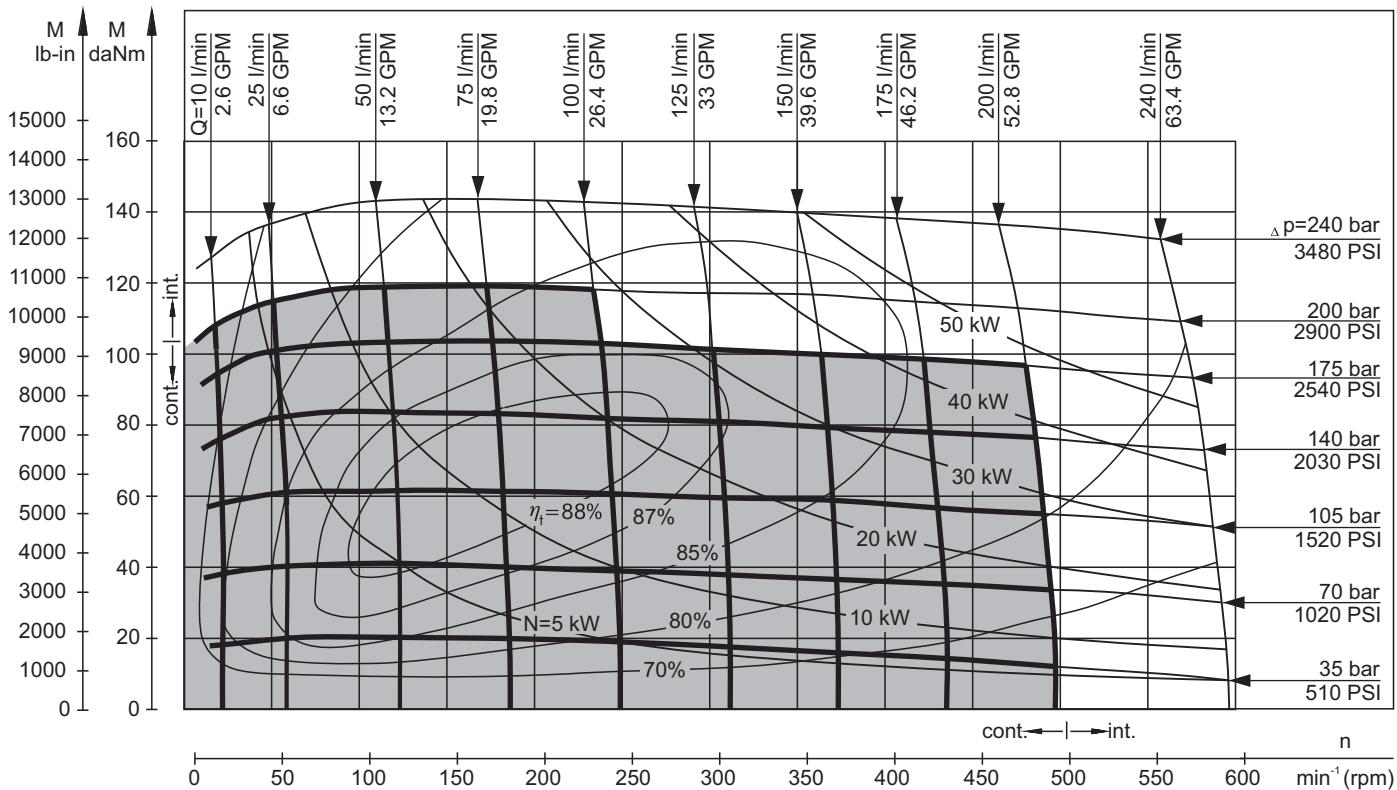


The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHV 500

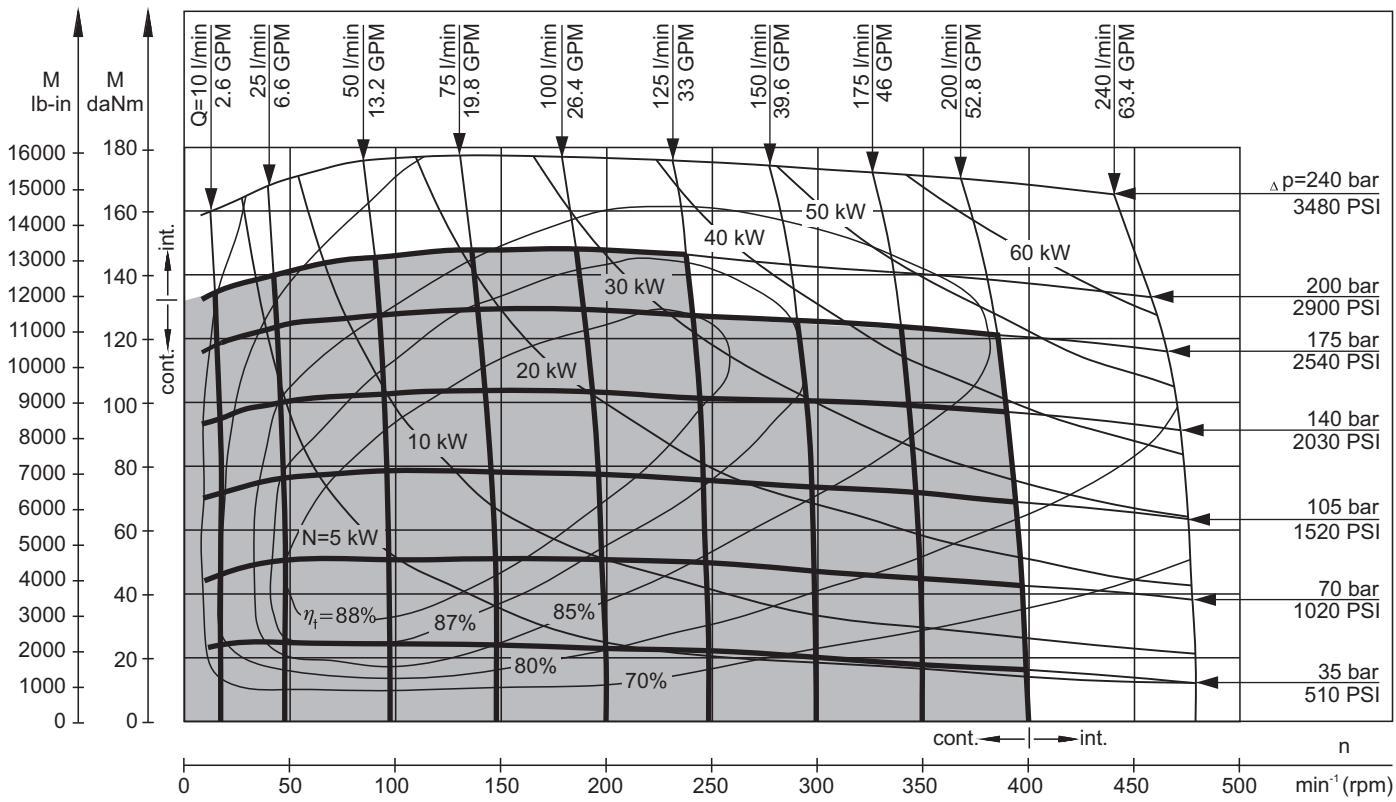


MLHV 630

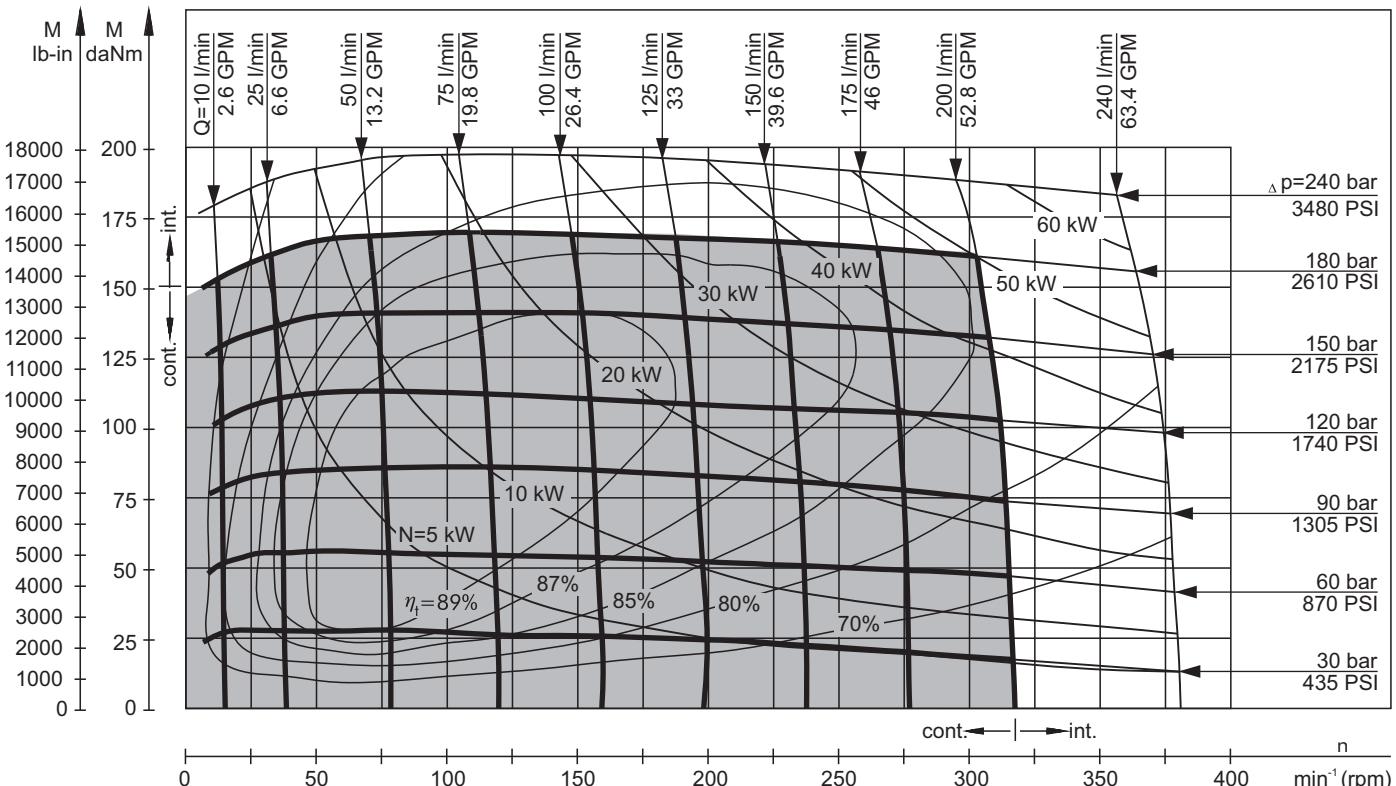

The function diagrams data is for average performance of randomly selected motors at back pressure 72.5÷145 PSI [5÷10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

FUNCTION DIAGRAMS

MLHV 800

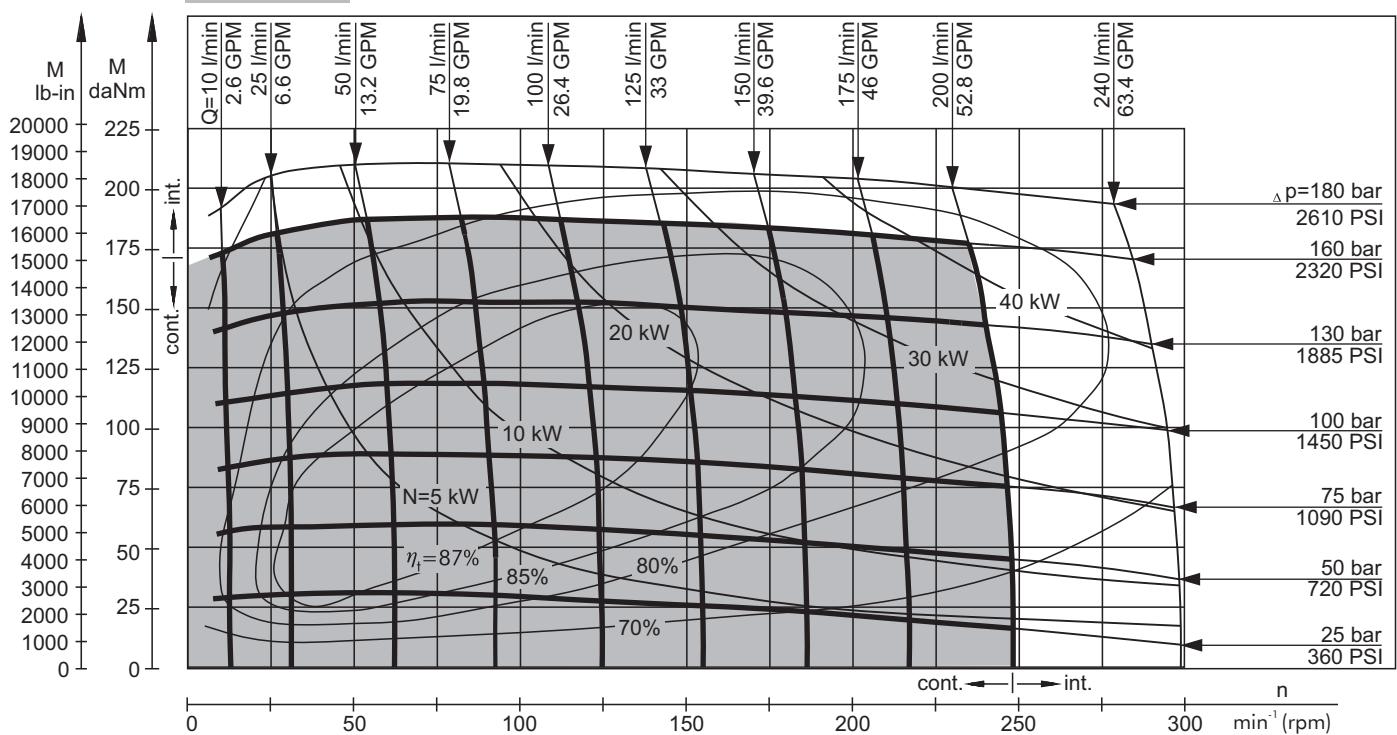



The function diagrams data is for average performance of randomly selected motors at back pressure 72.5±145 PSI [5±10 bar] and oil with viscosity of 150 SUS [32 mm²/s] at 122°F [50°C].

PERMISSIBLE SHAFT LOADS


The output shaft runs in tapered bearings that permit high axial and radial forces. The permissible radial load on the shaft is shown for an axial load of 0 N as function of the distance from the mounting flange to the point of load application. The curves apply to a B10 bearing life of 2000 hours at 100 RPM.

Curve "1" shows max. radial shaft load. Any shaft load exceeding the values shown by the curve will seriously reduce motor life.


Mounting Flange:

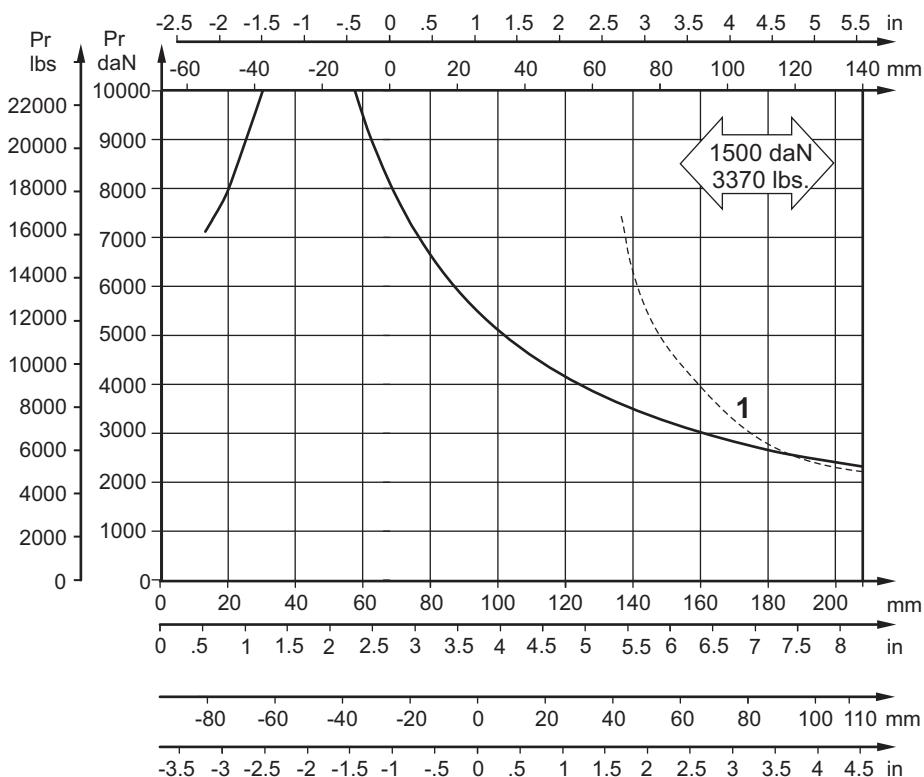

Standard




W - Wheel



C - Flange

DIMENSIONS AND MOUNTING DATA - MLHV

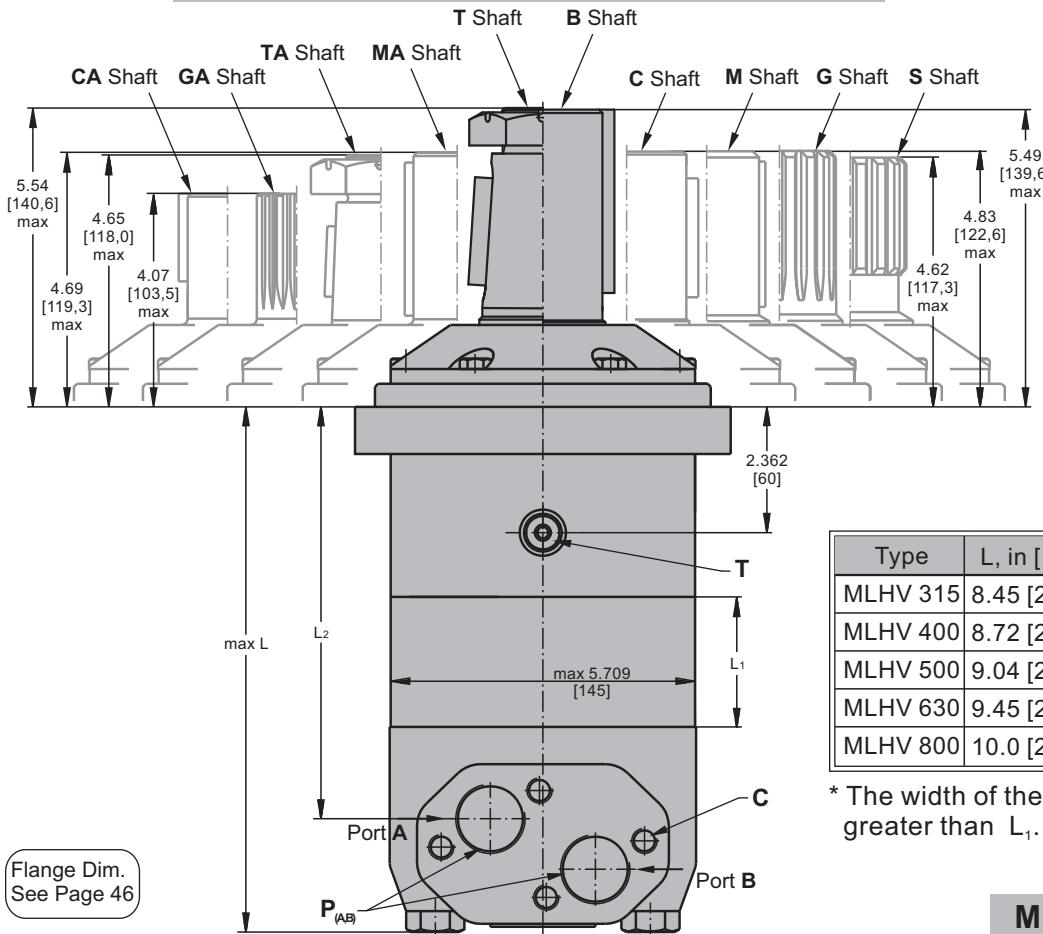

Flange Dim.
See Page 46

Port Dim.
See Page 46

Shaft Dim.
See Page 50

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW


Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

	Versions	
	[2]	[4]
C	4xM12	-
P (A,B)	2xG1	2x1 ⁵ / ₁₆ -12UN
T	G ¹ / ₄	% ₁₆ -18UNF


in [mm]

Type	L, in [mm]	L2, in [mm]	*L1, in [mm]
MLHVC 315	9.41 [239,0]	7.30 [185,5]	.87 [22,0]
MLHVC 400	9.68 [246,0]	7.58 [192,5]	1.14 [29,0]
MLHVC 500	10.0 [254,0]	7.89 [200,5]	1.46 [37,0]
MLHVC 630	10.41 [264,5]	8.31 [211,0]	1.87 [47,5]
MLHVC 800	10.96 [278,5]	8.86 [225,0]	2.42 [61,5]

* The width of the gerolor is .157 in [4 mm] greater than L₁.

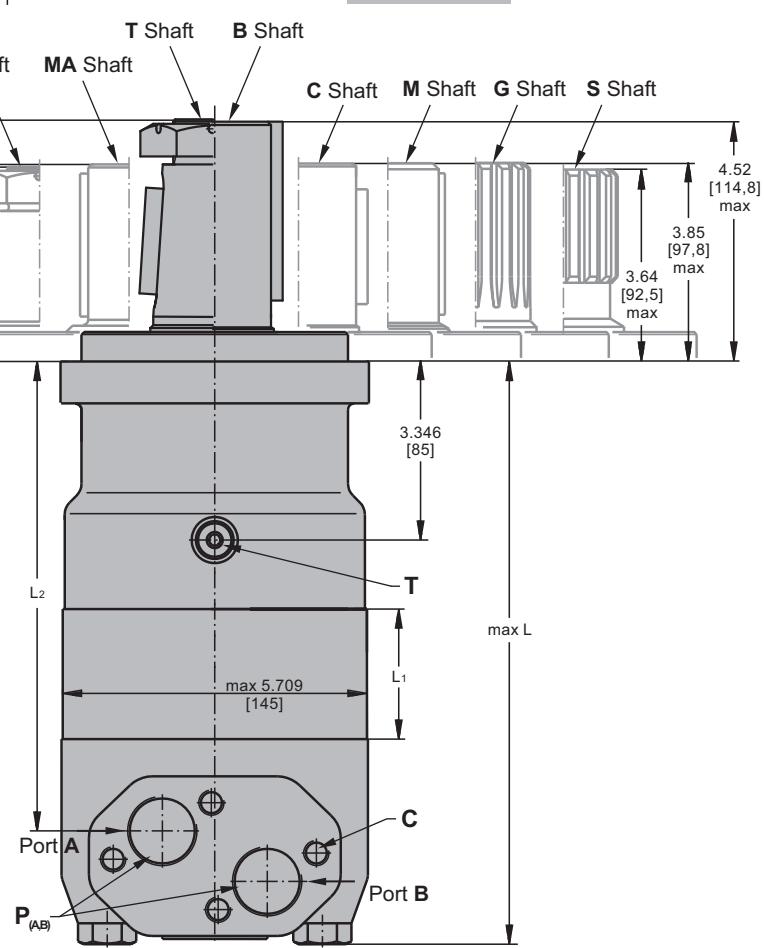


DIMENSIONS AND MOUNTING DATA - MLHVVW

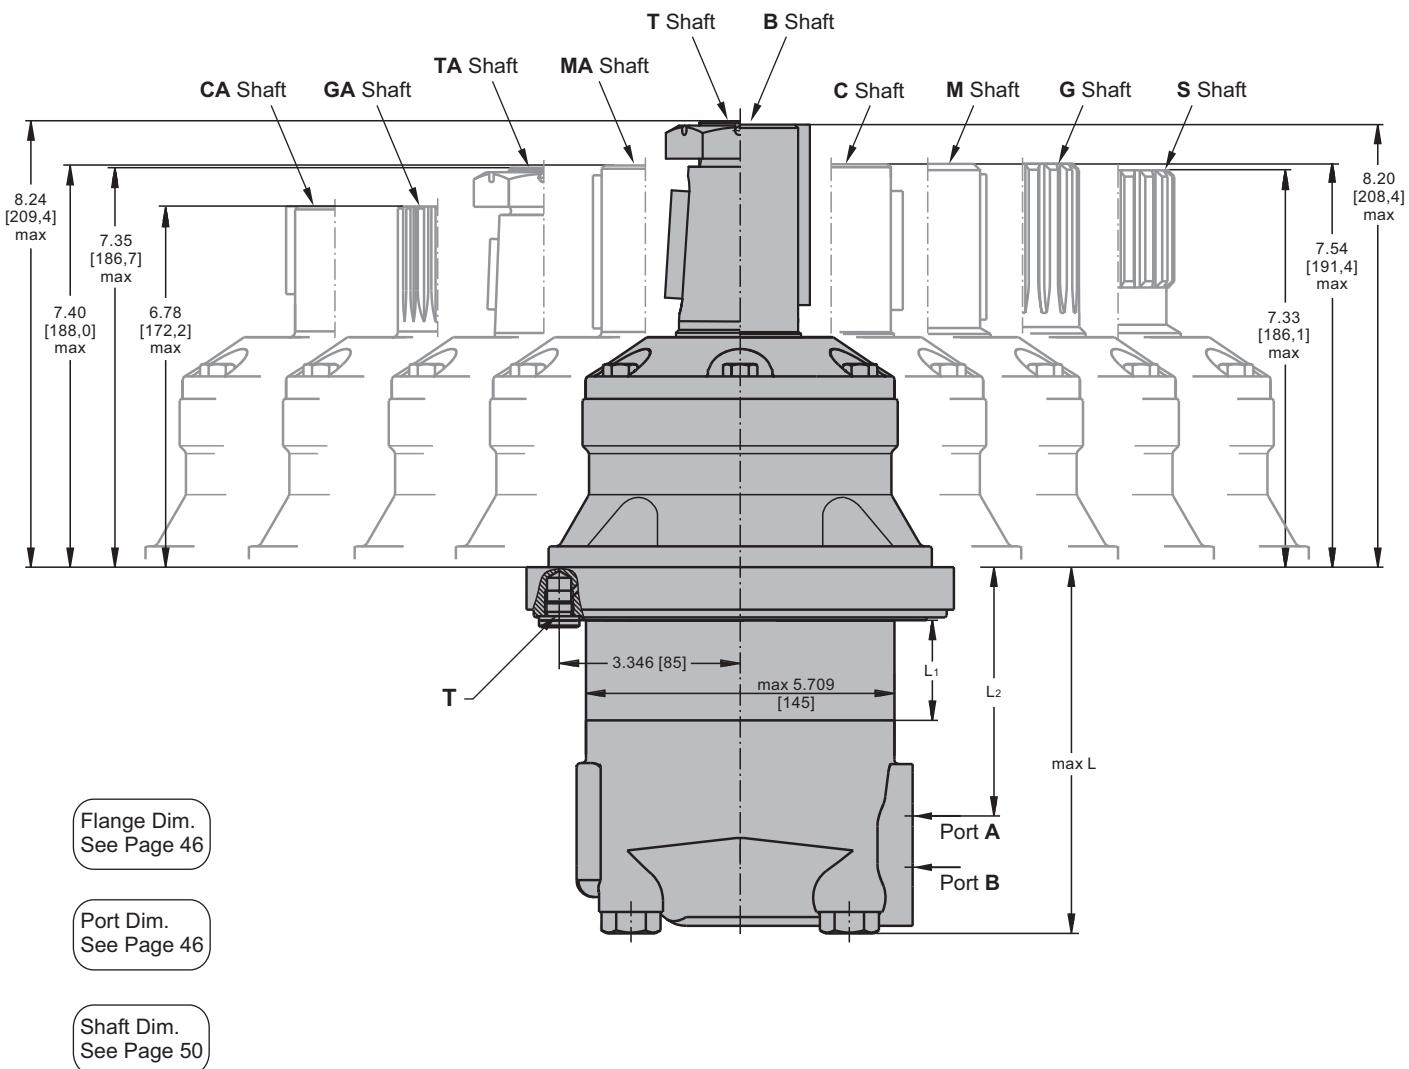

Standard Rotation
Viewed from Shaft End
Port A Pressurized - **CW**
Port B Pressurized - **CCW**

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - **CCW**
Port B Pressurized - **CW**

	Versions	
	[2]	[4]
C	4xM12	-
P (A,B)	2xG1	2x $\frac{1}{16}$ -12UN
T	G $\frac{1}{4}$	$\frac{9}{16}$ -18UNF




in [mm]

Type	L, in [mm]	L ₂ , in [mm]	*L ₁ , in [mm]
MLHVVW 315	5.75 [146]	3.62 [92]	.87 [22,0]
MLHVVW 400	6.02 [153]	3.90 [99]	1.14 [29,0]
MLHVVW 500	6.34 [161]	4.21 [107]	1.46 [37,0]
MLHVVW 630	6.77 [172]	4.65 [118]	1.87 [47,5]
MLHVVW 800	7.28 [185]	5.20 [132]	2.42 [61,5]


* The width of the gerotor is .157 in. [4 mm] greater than L₁.

MOUNTING


Square Mount (4 Holes)

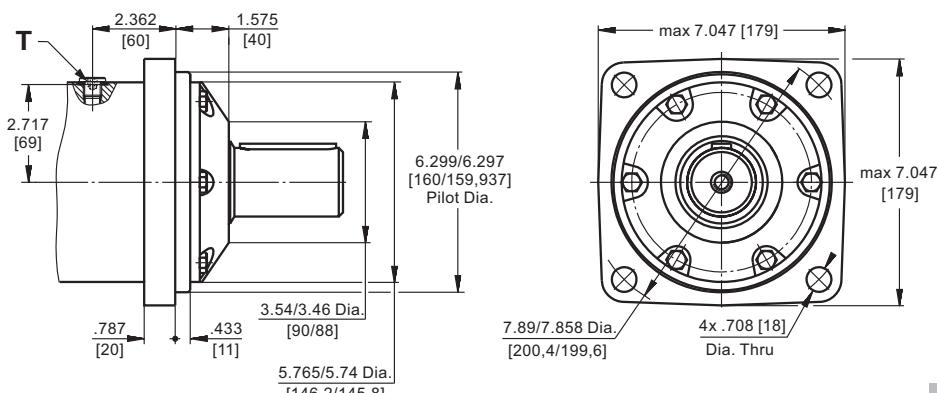

C Mount

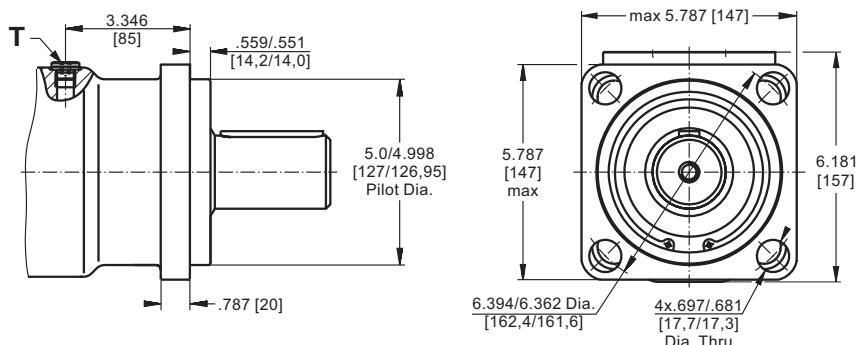



W Wheel Mount

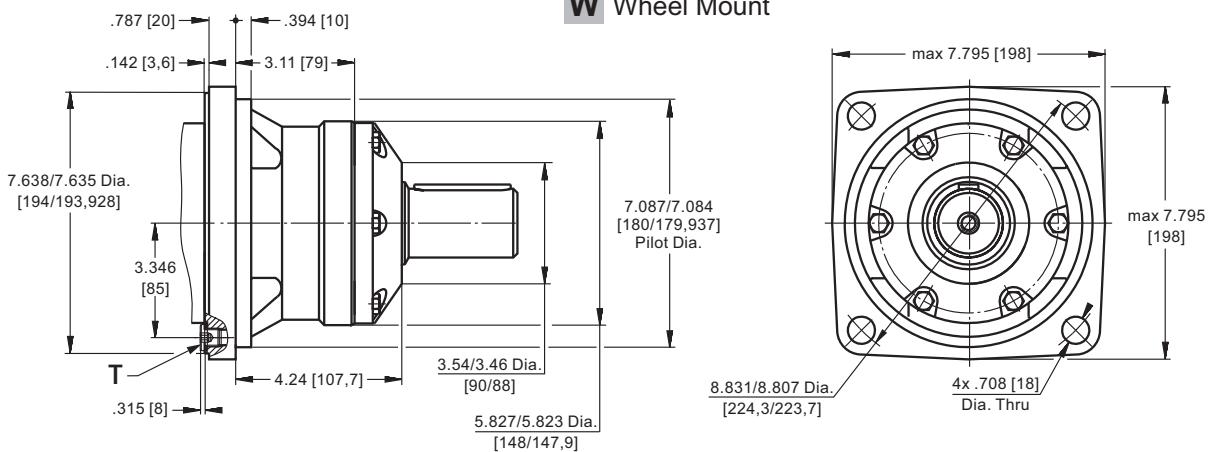

PORTS

Version **2**

Version **4**

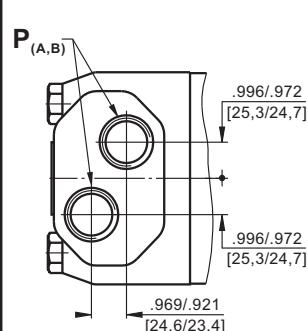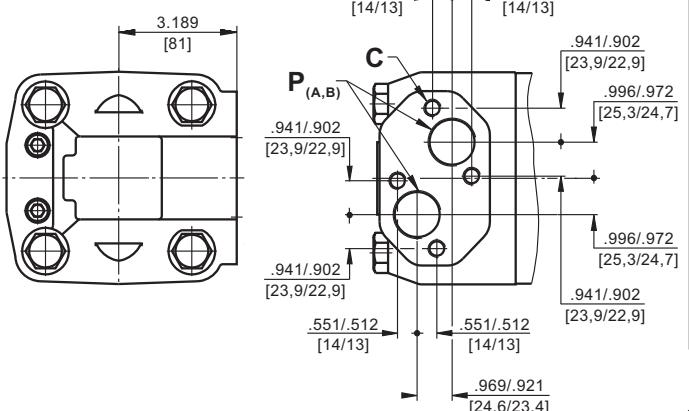


Standard Rotation

Viewed from Shaft End
Port A Pressurized - **CW**
Port B Pressurized - **CCW**

Reverse Rotation



Viewed from Shaft End
Port A Pressurized - **CCW**
Port B Pressurized - **CW**

	Versions	
	2	4
C	4xM12	-
P (A,B)	2xG1	2x1½-12UN
T	G1¼	¾-18UNF



in [mm]

DIMENSIONS AND MOUNTING DATA

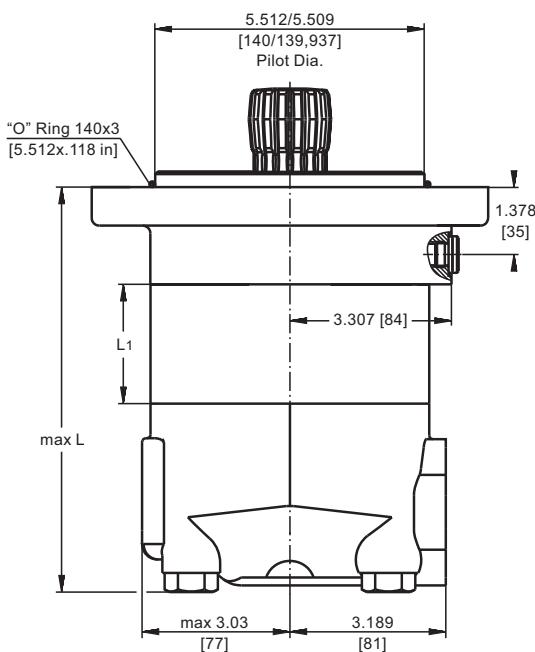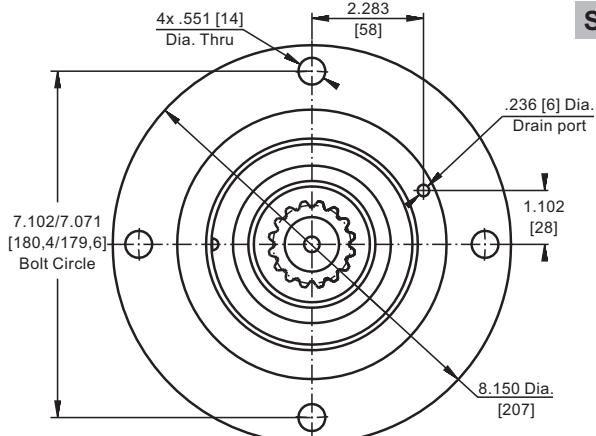

S Short Mount

Type	L, in [mm]	L ₂ , in [mm]	*L ₁ , in [mm]
MLHVS 315	6.73[171]	4.61 [117]	.87 [22,0]
MLHVS 400	7.05[179]	4.88 [124]	1.14 [29,0]
MLHVS 500	7.32[186]	5.20 [132]	1.46 [37,0]
MLHVS 630	7.76[197]	5.63 [143]	1.87 [47,5]
MLHVS 800	8.31[211]	6.18 [157]	2.42 [61,5]

* The width of the gerotor is .157 in [4 mm] greater than L₁


Type	Versions	
	2	4
C	4xM12	-
P (A,B)	2xG1	2x1½-12UN
T	G1/4	9/16-18UNF

Standard Rotation


Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation



Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

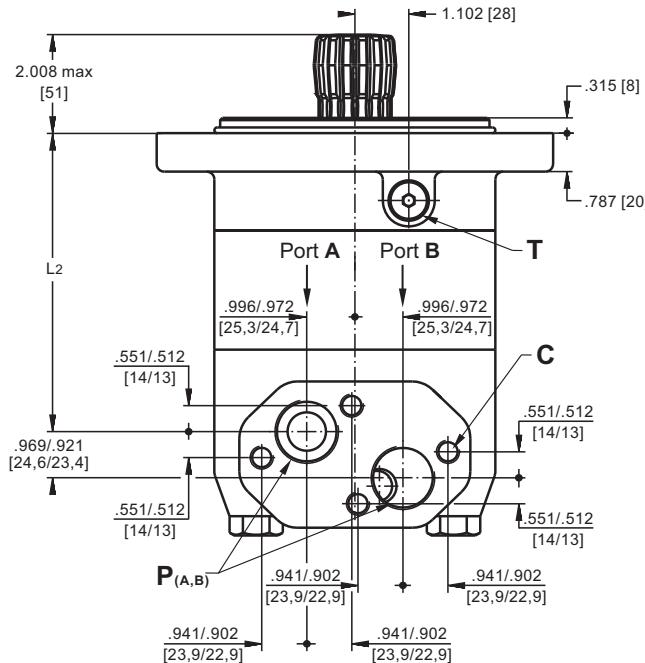

DIMENSIONS OF THE ATTACHED COMPONENT

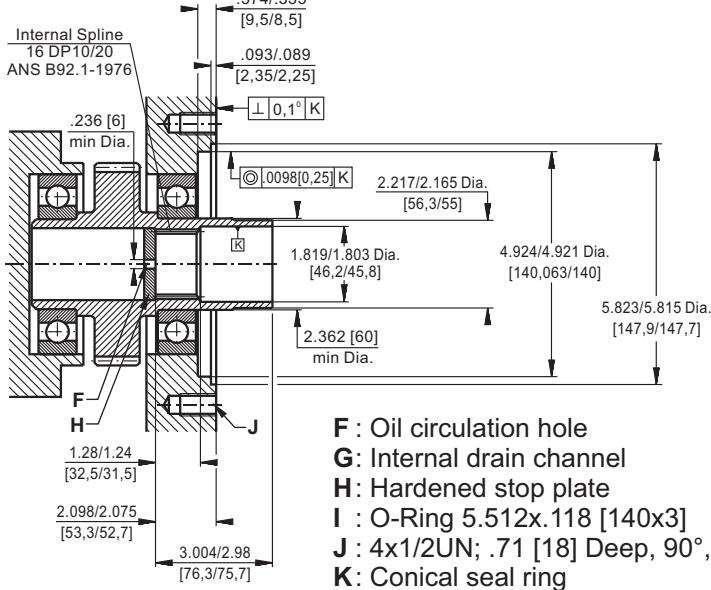


- F : Oil circulation hole
- G : Internal drain channel
- H : Hardened stop plate
- I : O-Ring 5.512x.118 [140x3]
- J : 4x1/2UN; .71 [18] Deep, 90°, 7.087 [180] Dia. B. C.
- K : Conical seal ring
- T : Drain connection G1/4 or 9/16 - 18UNF

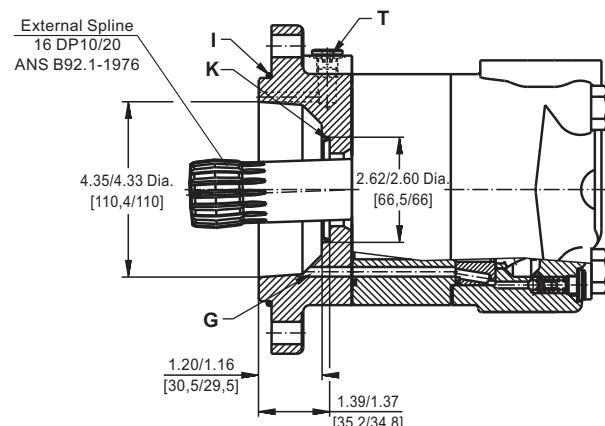

in [mm]



DIMENSIONS AND MOUNTING DATA

V Very Short Mount

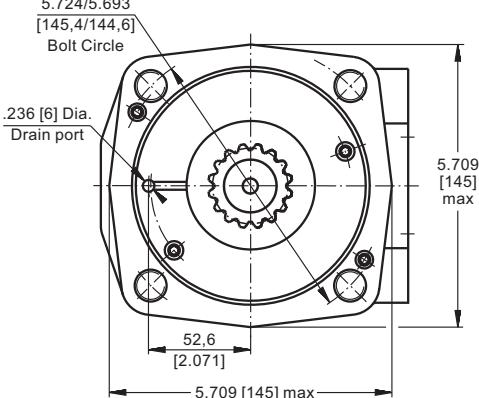

Type	L, in [mm]	L ₂ , in [mm]	L ₃ , in [mm]	*L ₁ , in [mm]
MLHVV 315	4.78 [121,5]	2.68 [68]	1.16 [29,5]	.87 [22,0]
MLHVV 400	5.06 [128,5]	2.95 [75]	1.28 [32,5]	1.14 [29,0]
MLHVV 500	5.37 [136,5]	3.27 [83]	1.36 [34,5]	1.46 [37,0]
MLHVV 630	5.79 [147,0]	3.66 [93]	1.34 [34,0]	1.87 [47,5]
MLHVV 800	6.34 [161,0]	4.23 [107,5]	1.18 [30,0]	2.42 [61,5]

* The width of the gerotor is .157 in [4 mm] greater than L₁.

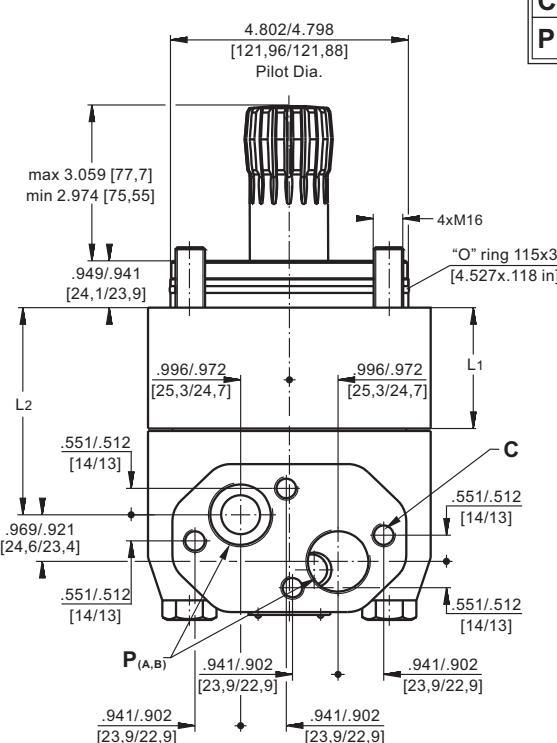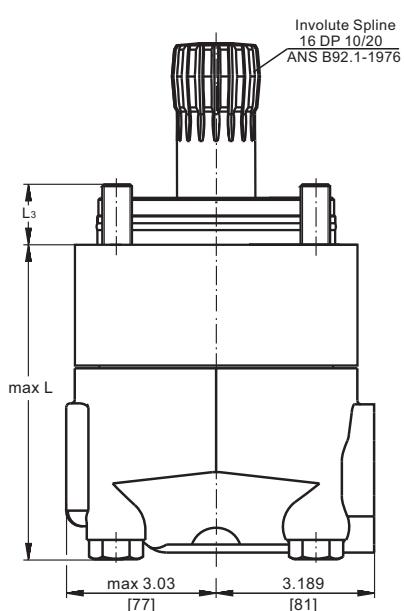


Standard Rotation
Viewed from Shaft End
Port A Pressurized - **CW**
Port B Pressurized - **CCW**


Reverse Rotation
Viewed from Shaft End
Port A Pressurized - **CCW**
Port B Pressurized - **CW**



DIMENSIONS OF THE ATTACHED COMPONENT

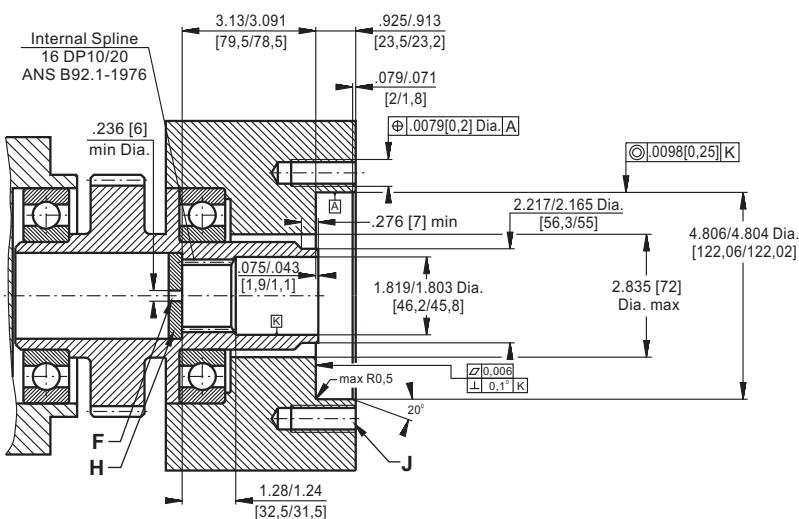

F : Oil circulation hole
G : Internal drain channel
H : Hardened stop plate

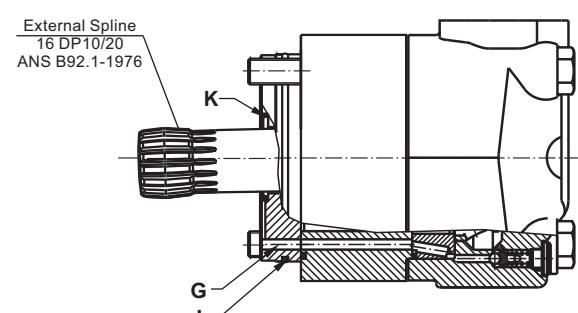

I : O- Ring 4.528x.118 in [115x3 mm]
J : 4xM16; 1.42 [36] Deep, 90°, 5.709 [145] Dia. B. C.
K: Conical seal ring

DRAIN CONNECTION

A drain line has to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For MLHVS at the drain port of the motor;
- For MLHVV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANS B92.1-1976, class 5


[$m=2.54$; corrected $x.m=1$]

Flat Root Side Fit	inch	mm
Number of Teeth z	16	16
Diametral Pitch DP	10/20	10/20
Pressure Angle	30°	30°
Pitch Dia. D	1.6	40,640
Major Dia. D_{ri}	1.796 ± 1.780	$45,2^{+0,4}$
Minor Dia. D_i	1.5175 ± 1.516	$38,5^{+0,039}$
Space Width [Circular] L_0	$.2055 \pm .2025$	$5,18 \pm 0,037$
Fillet Radius R	.015	0,4
Max. Measurement between Pins L	1.284 ± 1.278	$32,47^{+0,15}$
Pin Dia. d	$.22051 \pm .22043$	$5,6 \pm 0,001$

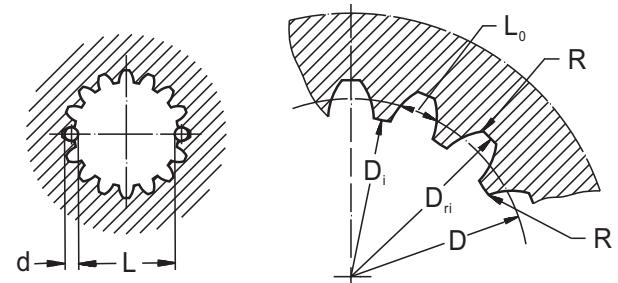


Hardening Specification:
HV=750±50 on the surface.
HV=560 at .035-.019 [0,7±0,2] case depth
Material: 20 MoCr4 DIN 17210 or SAE8620.

MOTOR WITH TACHO CONNECTION

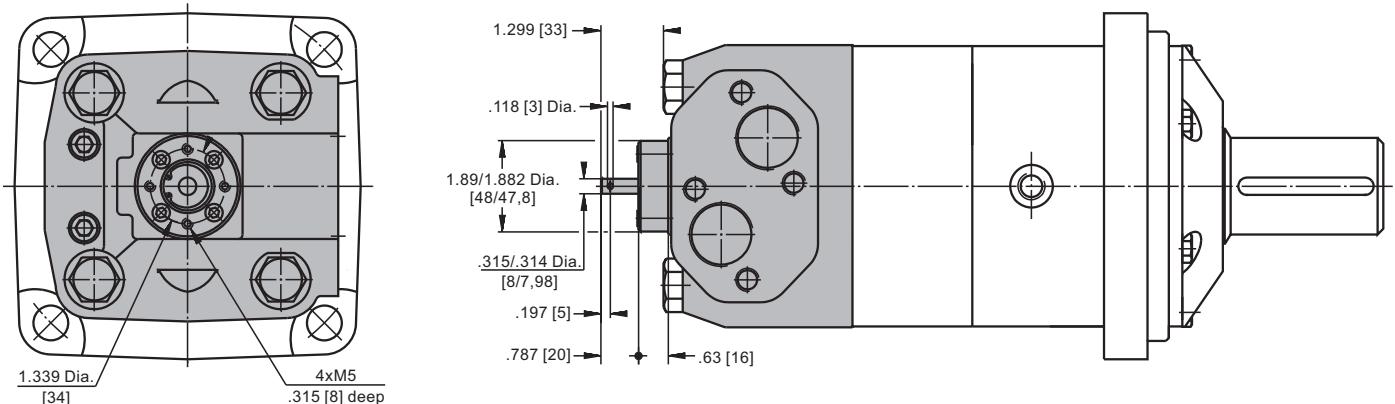

MAX. PERMISSIBLE SHAFT SEAL PRESSURE

Max. return pressure without drain line or
max. pressure in the drain line

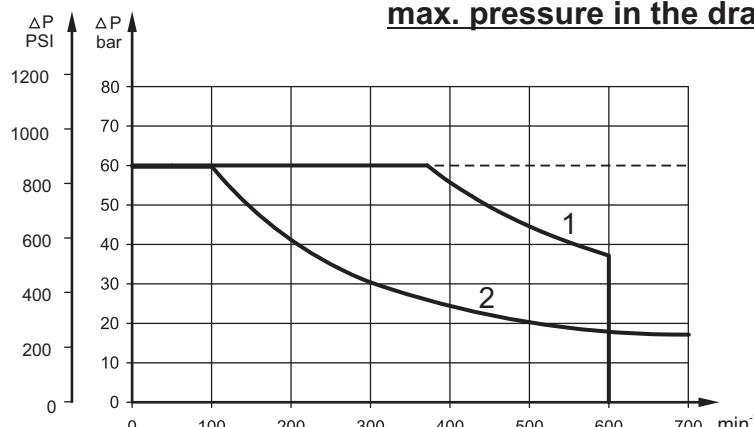


1: Drawing for High Pressure Seal ("U" Seal)

2: Drawing for Standard Shaft Seal


— continuous operations
- - - - - intermittent operations

SHAFT EXTENSIONS


C - 2 1/4" [57,15] straight, Parallel key 1/2"x1/2"x 2 1/4" BS46
Max. Torque 24000 lb-in [271,2 daNm]

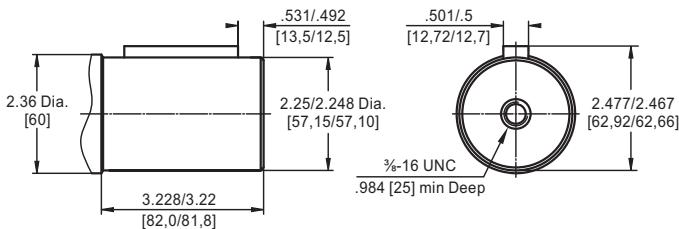


B - 2 1/4" [57,15] straight, Parallel key 1/2"x1/2"x 2 1/4" BS46
Max. Torque 24000 lb-in [271,2 daNm]

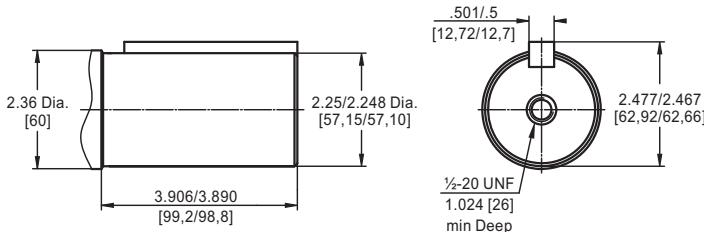


M - ø50 straight, Parallel key A14x9x70 DIN 6885
Max. Torque 24000 lb-in [271,2 daNm]

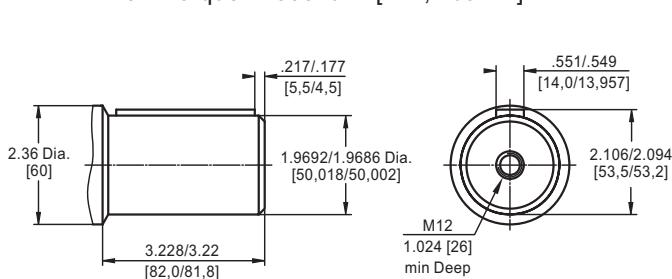

MA - ø40 straight, Parallel key A12x8x70 DIN 6885
Max. Torque 11755 lb-in [132,8 daNm]

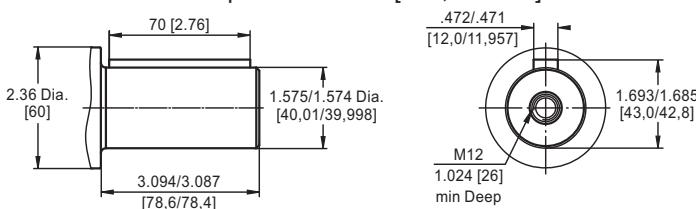


GA - ø1 1/2" splined 17T, DP 12/24 ANSI B92.1-1976
Max. Torque 11755 lb-in [132,8 daNm]

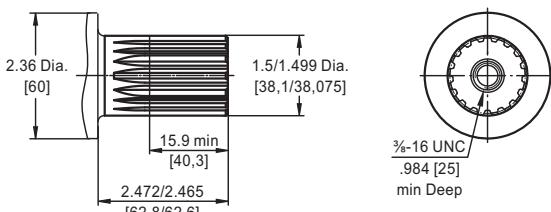


in [mm]


G - 16T Splined, 2 1/8" [53,975] ANS B92.1-1976
Max. Torque 24000 lb-in [271,2 daNm]

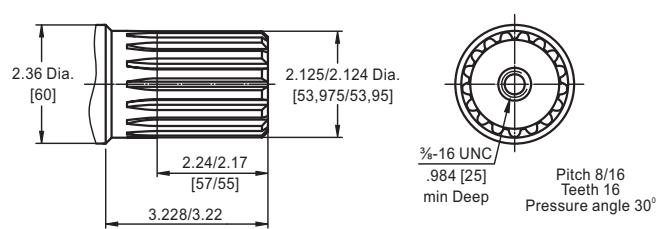


S - 16T Splined, 2 1/8" [53,975] ANS B92.1-1976
Max. Torque 24000 lb-in [271,2 daNm]

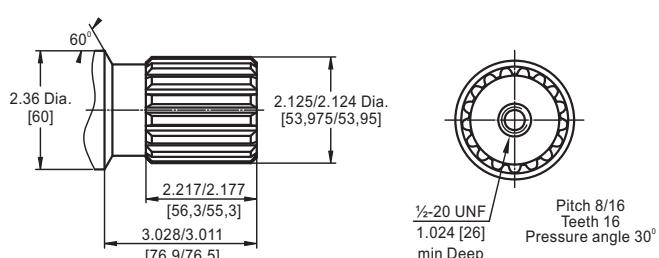


T - 2 1/4" [57,15] SAE J501 Tapered 1:8,
Parallel key 9/16"x9/16"x 2" BS46
Max. Torque 24000 lb-in [271,2 daNm]

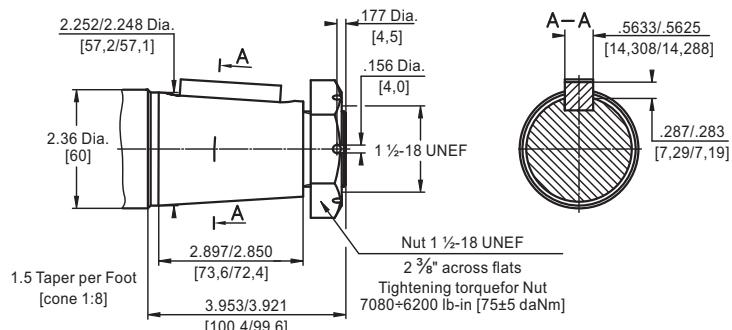

CA - ø1 1/2" straight, Parallel key 3/8"x 3/8"x 1 5/8" BS46
Max. Torque 11755 lb-in [132,8 daNm]

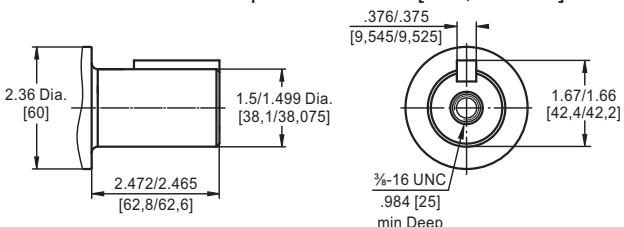

TA - SAE J501 Tapered 1:8 Parallel key 7/16"x 7/16"x 1 1/4" BS46
Max. Torque 18650 lb-in [210 daNm]

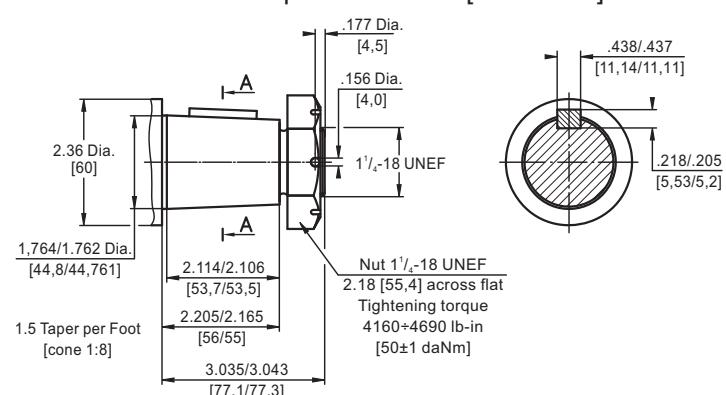

ORDER CODE

M L H V	1	2	3	4	5	6	7
----------------	---	---	---	---	---	---	---

Pos.1 - Mounting Flange

omit - Square, 4 holes

C - C Flange, 4 holes

W - Wheel mount

S - Short

V - Very short

Pos.2 - Displacement code

315 - 19.18 in³/rev [314,5 cm³/rev]

400 - 24.45 in³/rev [400,9 cm³/rev]

500 - 30.48 in³/rev [499,6 cm³/rev]

630 - 38.38 in³/rev [629,1 cm³/rev]

800 - 48.91 in³/rev [801,8 cm³/rev]

Pos.3 - Shaft Extensions

omit - for **S** and **V** mounting flange

C - 2½" [57,15] straight, Parallel key

B - 2½" [57,15] straight, Parallel key

M - 50 mm straight, Parallel key

G - 2⅛" [53,975] 16T Splined

S - 2⅛" [53,975] 16T Splined

T - 2¼" [57,15] SAE J501 Tapered

CA - 1½" straight, Parallel key

MA - 40 mm straight, Parallel key

GA - 1½" 17T Splined

TA - 1¾" [44,50] J501 Tapered

Pos.4 - Port Size/Type [standard manifold to each]

2 - side ports, 2xG1, G1¼, BSP thread, ISO 228

4 - side ports, 2x1½-12 UN, O-ring, ½-18 UNF

Pos.5 - Shaft Seal Version [see page 50]

omit - Low pressure shaft seal

U - High pressure shaft seal


Pos.6 - Special Features [see page 58]

Pos.7 - Design Series

omit - Factory specified



The hydraulic motors are mangano-phosphatized as standard.

HYDRAULIC MOTORS MLHHW

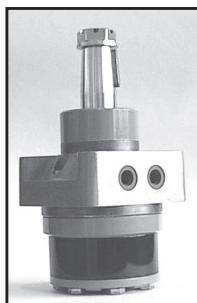

APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Machines for agriculture
- » Food industries
- » Mining machinery etc.

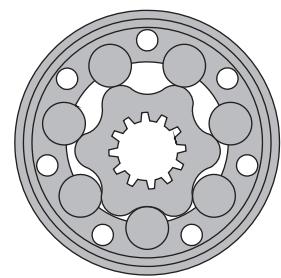

CONTENTS

Specification data	53÷54
Dimensions and mounting	55
Shaft extensions	56
Permissible shaft loads	57
Order code	57

OPTIONS

- » Model- Disk valve, roll-gerotor
- » Side port
- » Shaft - straight, splined and tapered
- » SAE and BSPP ports
- » Other special features


GENERAL

Max. Displacement,	in ³ /rev [cm ³ /rev]	33.55 [550]
Max. Speed,	[RPM]	475
Max. Torque,	lb-in [daNm]	cont.: 8700 [98,3] int.: 9450 [106,8]
Max. Output,	HP [kW]	29 [21,6]
Max. Pressure Drop,	PSI [bar]	cont.: 3000 [205] int. 3250 [225]
Max. Oil Flow,	GPM [lpm]	20 [75]
Min. Speed,	[RPM]	5
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	°F [°C]	-22÷194 [-30÷90]
Optimal Viscosity range,	SUS [mm ² /s]	98÷347 [20÷75]
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 microns)

Oil flow in drain line

Pressure drop PSI [bar]	Viscosity SUS [mm ² /s]	Oil flow in drain line GPM [lpm]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]

Pressure Losses

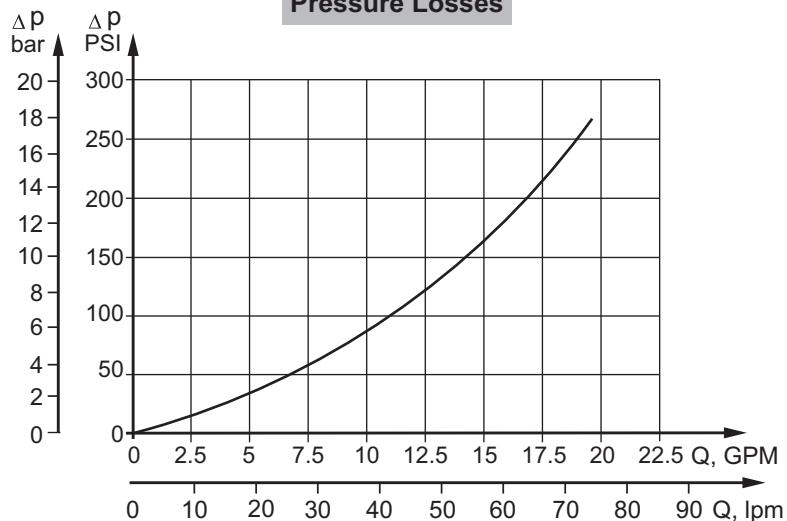

SPECIFICATION DATA

Type	MLHHW 125	MLHHW 160	MLHHW 200	MLHHW 235	MLHHW 250	MLHHW 300	MLHHW 315
Displacement, in³/rev [cm³/rev]	7.69 [126]	9.64 [157,8]	12.28 [201,3]	14.33 [235,3]	15.37 [252]	18.3 [300]	19.21 [314,9]
Max. Speed, [RPM]	Cont. for LL/LSV version Int.* for LL/LSV version	475/200 600/225	375/200 470/250	300/200 375/275	255/200 320/250	240/200 300/250	200 250
Max. Torque lb-in [daNm]	Cont. Int.*	2980 [33,7] 3290 [37,2]	3760 [42,5] 4130 [46,7]	4744 [53,6] 5186 [58,6]	5580 [63] 6150 [69,5]	5974 [67,5] 6514 [73,6]	7151 [80,8] 7753 [87,6]
Max. Output HP [kW]	Cont. for LL version Cont. for LSV version Int.* for LL version Int.* for LSV version	18.8 [14,0] 6.8 [5,1] 25.5 [19,8] 9.1 [6,8]	20.8 [15,5] 11 [8,2] 29 [21,6] 14.5 [10,8]	19.2 [14,3] 12.7 [9,5] 26.3 [19,6] 17 [12,7]	18.2 [13,6] 14.5 [10,8] 25.7 [19,2] 18.9 [14,1]	18.9 [14,1] 15.3 [11,4] 25.1 [18,7] 20.9 [15,6]	18.5 [13,8] 18.5 [13,8] 25.5 [19] 25.5 [19]
Max. Pressure Drop, PSI [bar]	Cont. Int.*	3000 [205]	3000 [205]	3000 [205]	3000 [205]	3000 [205]	3000 [205]
Max. Oil Flow GPM [lpm]	Cont. for LL Version Cont. for LSV Version Int.* for LL Version Int.* for LSV Version	16 [60] 6.6 [25] 20 [75] 8.5 [32]	16 [60] 8.5 [32] 20 [75] 10.5 [40]	16 [60] 10.5 [40] 20 [75] 13.2 [50]	16 [60] 12.4 [47] 20 [75] 15.3 [58]	16 [60] 13.2 [50] 20 [75] 16.5 [62,5]	16 [60] 16 [60] 20 [75] 20 [75]
Max. Inlet Pressure PSI [bar]	Cont. Int.*	3050 [210]	3050 [210]	3050 [210]	3050 [210]	3050 [210]	3050 [210]
Max. Return Pressure without Drain Line or	Cont. 0-100 RPM Cont. 100-200 RPM	1100 [75]	1100 [75]	1100 [75]	1100 [75]	1100 [75]	1100 [75]
Max. Pressure in Drain Line, PSI [bar]	Cont. 200-300 RPM Int.* 0-max. RPM	290 [20]	290 [20]	290 [20]	290 [20]	290 [20]	290 [20]
Max. Starting Pressure with Unloaded Shaft, PSI [bar]		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	145 [10]
Min. Starting Torque, lb-in [daNm]	At max.press.dropCont At max.press.drop Int.*	2442 [27,6] 2650 [29,9]	3080 [34,8] 3310 [37,4]	3900 [44] 4151 [46,9]	4575 [51,7] 4920 [55,6]	4870 [55] 5215 [58,9]	5840 [66] 6215 [70,2]
Min. Speed***, [RPM]		10	10	10	10	10	10
Weight, lb [kg]		20.9 [12,2]	27.6 [12,5]	28.7 [13]	29.5 [13,4]	30 [13,6]	30.9 [14]
							31.3 [14,2]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA

Type	MLHHW 350	MLHHW 370	MLHHW 400	MLHHW 470	MLHHW 500	MLHHW 535	MLHHW 550
Displacement, in³/rev [cm³/rev]	21.21 [347,8]	22.51 [369,2]	24.2 [396,8]	28.71 [470,6]	30.65 [502,4]	32.7 [535]	33.55 [550]
Max. Speed, [RPM]	Cont. Int.*	172 215	160 200	150 185	125 160	120 150	112 140
Max. Torque lb-in [daNm]	Cont. Int.*	8143 [92]	8640 [97,6]	8600 [97,2]	8355 [94,4]	8700 [98,3]	8140 [92]
Max. Output HP [kW]	Cont. Int.*	18.2 [13,6]	17.7 [13,2]	16.8 [12,5]	14.2 [10,6]	14.5 [10,8]	12.6 [9,4]
Max. Pressure Drop, PSI [bar]	Cont. Int.*	3000 [205]	3000 [205]	2685 [185]	2175 [150]	2175 [150]	1885 [130]
Max. Oil Flow GPM [lpm]	Cont. Int.*	16 [60]	16 [60]	16 [60]	16 [60]	16 [60]	16 [60]
Max. Inlet Pressure PSI [bar]	Cont. Int.*	3050 [210]	3050 [210]	3050 [210]	3050 [210]	3050 [210]	3050 [210]
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, PSI [bar]	Cont. 0-100 RPM Cont. 100-200 RPM Cont. 200-300 RPM Int.* 0-max. RPM	1100 [75]	1100 [75]	1100 [75]	1100 [75]	1100 [75]	1100 [75]
Max. Starting Pressure with Unloaded Shaft, PSI [bar]		145 [10]	145 [10]	145 [10]	145 [10]	145 [10]	145 [10]
Min. Starting Torque, Ib-in [daNm]	At max.press.drop Cont. At max.press.drop Int.*	6682 [75,5] 7090 [80,1]	7080 [80] 7523 [85,0]	6877 [77,7] 7531 [85,1]	6850 [77,4] 7364 [83,2]	6903 [78] 5678 [85,5]	6682 [75,5] 7470 [84,4]
Min. Speed***, [RPM]		8	8	8	8	8	5
Weight, lb [kg]		32.2 [14,6]	32.6 [14,8]	33.5 [15,2]	35.3 [16]	35.9 [16,3]	36.8 [16,7]
							37 [16,8]


* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 70 SUS [13 mm²/s] at 122°F [50°C].
5. Recommended maximum system operating temperature is 180°F [82°C].
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS AND MOUNTING DATA

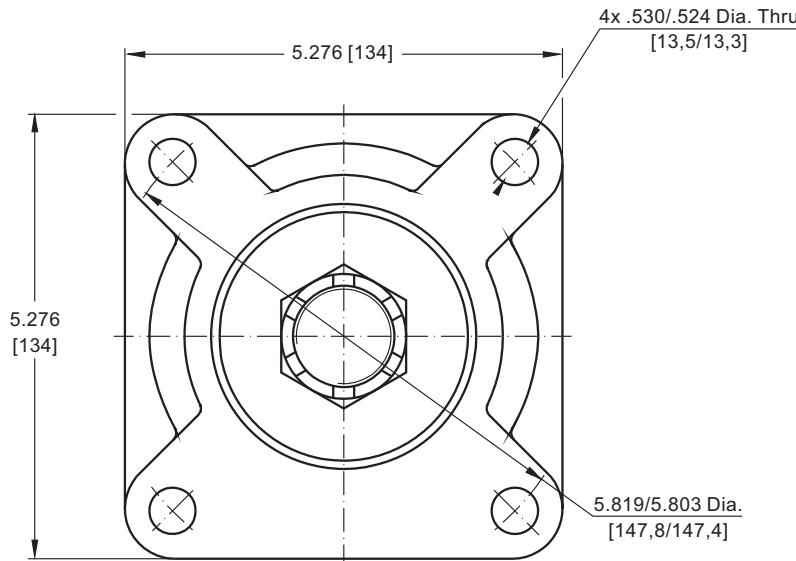

Standard Rotation
Viewed from Shaft End
Port **A** Pressurized - **CW**
Port **B** Pressurized - **CCW**

Reverse Rotation
Viewed from Shaft End
Port **A** Pressurized - **CCW**
Port **B** Pressurized - **CW**

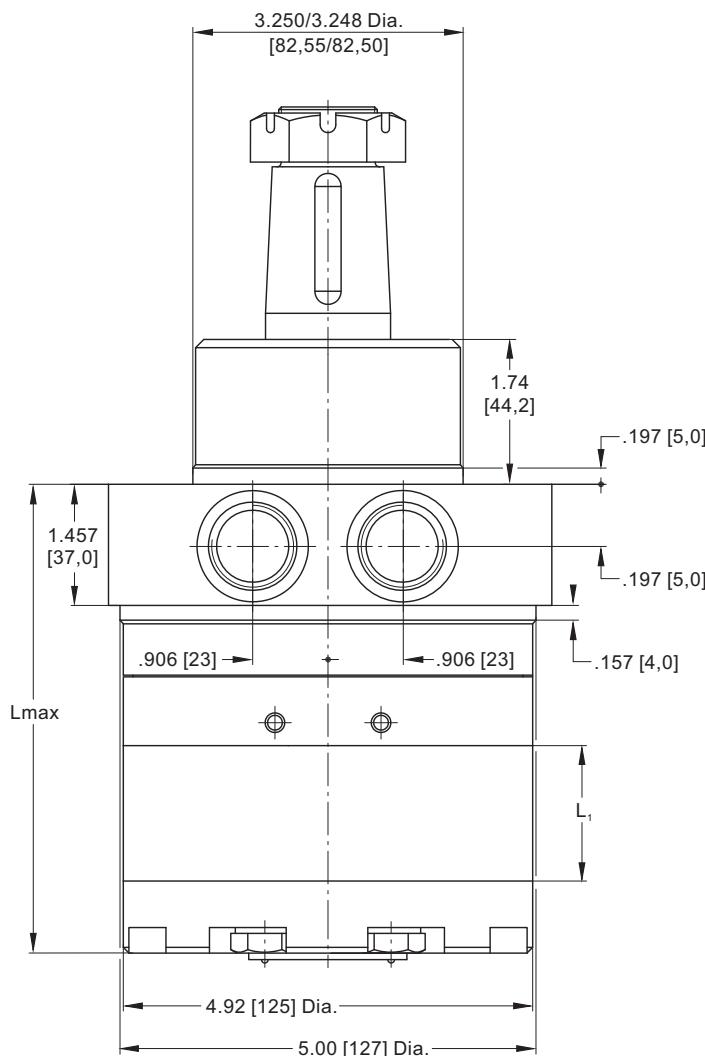


	Versions	
	2	4
P _(A,B)	2xG½	2x7/8-14UNF
T	G1/4	7/16-20UNF

Type	L _{max} , in [mm]	L ₁ , in [mm]
MLHHW 125	4.69 [119]	.68 [17,4]
MLHHW 160	4.84 [123]	.86 [21,8]
MLHHW 200	5.08 [129]	1.09 [27,8]
MLHHW 235	5.28 [134]	1.28 [32,5]
MLHHW 250	5.35 [136]	1.37 [34,8]
MLHHW 300	5.59 [142]	1.63 [41,4]
MLHHW 315	5.71 [145]	1.71 [43,5]
MLHHW 350	5.87 [149]	1.89 [48,0]
MLHHW 370	5.98 [152]	2.01 [51,0]
MLHHW 400	6.14 [156]	2.16 [54,8]
MLHHW 470	6.54 [166]	2.56 [65,0]
MLHHW 500	6.73 [171]	2.73 [69,4]
MLHHW 535	6.89 [175]	2.92 [74,1]
MLHHW 550	6.97 [177]	2.99 [76,0]

SHAFT EXTENSIONS


C

$\varnothing 38,1$ straight, Parallel key $\frac{3}{8}'' \times \frac{3}{8}'' \times 1\frac{1}{2}''$ BS46
Max. Torque 10630 lb-in [120 daNm]

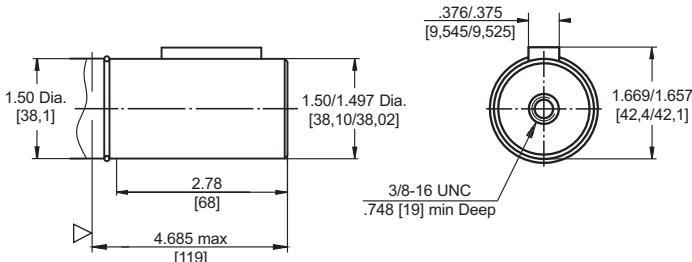


R

$1\frac{1}{4}''[31,75]$ SAE J501 Tapered, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1''$ BS46
Max. Torque 6815 lb-in [77 daNm]

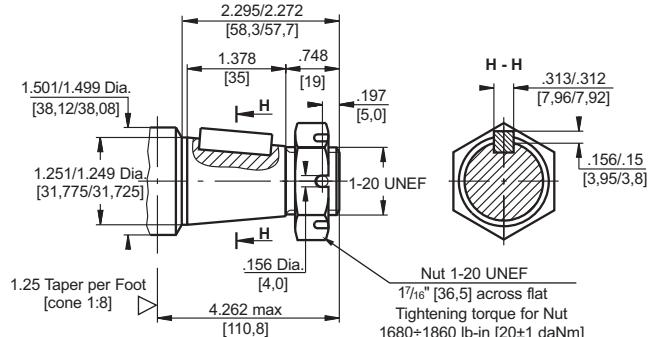


K

$1\frac{1}{4}''[31,75]$ straight, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{2}''$ BS46
Max. Torque 6815 lb-in [77 daNm]

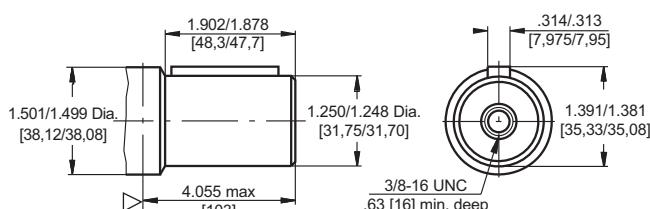


T

$1\frac{1}{2}''[38,1]$ Tapered, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46
Max. Torque 10630 lb-in [120 daNm]

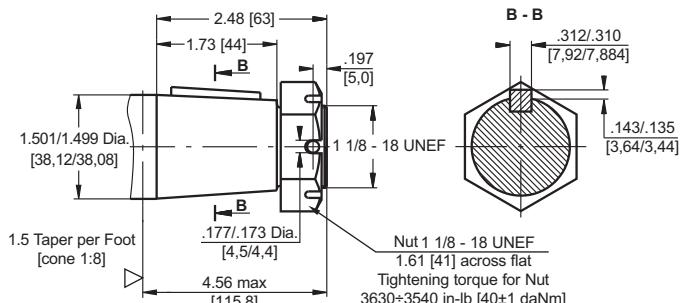


M

$\varnothing 32$ straight, Parallel key A10x8x32 DIN 6885
Max. Torque 6815 lb-in [77 daNm]

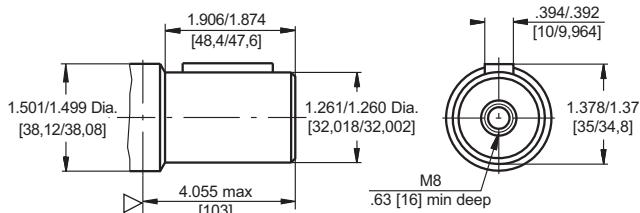


L

$1\frac{1}{4}''[31,75]$ splined 14T, ANSI B92.1-1976
Max. Torque 6815 lb-in [77 daNm]

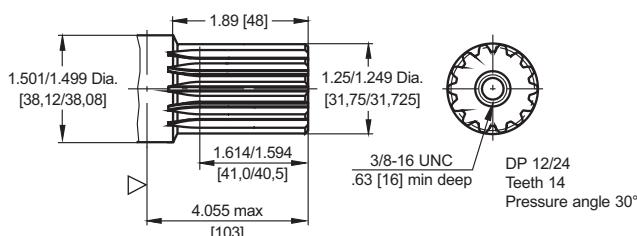


KB

$\varnothing 35$ tapered 1:10, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46
Max. Torque 8410 lb-in [95 daNm]

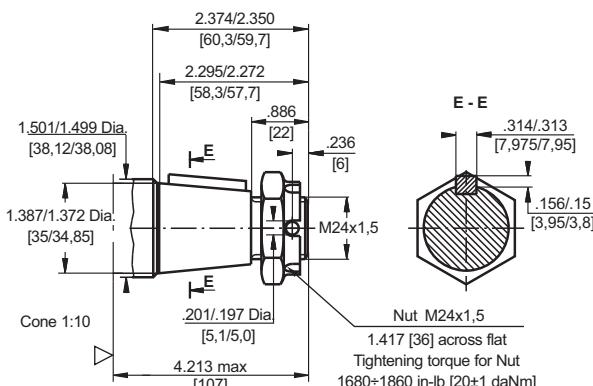

▽ - Motor Mounting Surface

PERMISSIBLE SHAFT LOADS

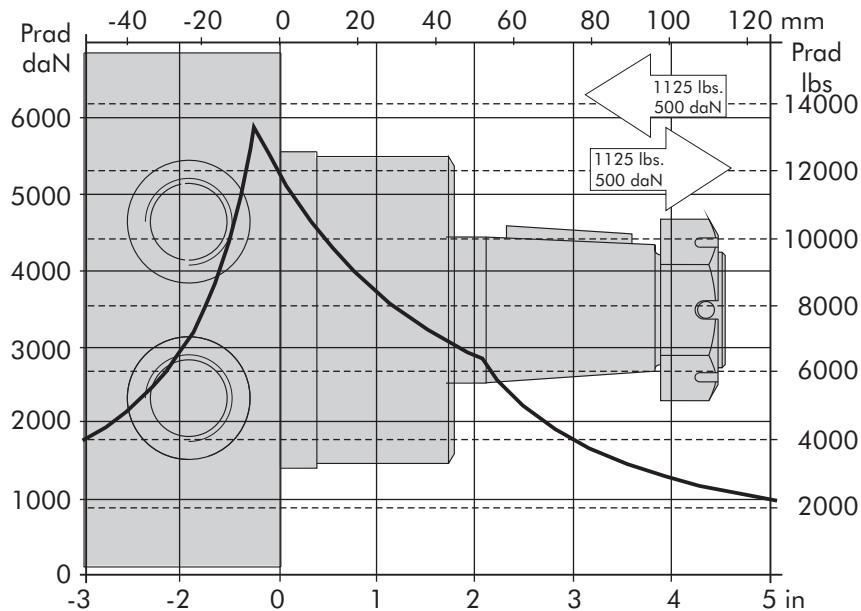

ORDER CODE

MLHHW	1	2	3	4	5
-------	---	---	---	---	---

Pos.1 - Displacement code

125	- 7.69 in ³ /rev [126,00 cm ³ /rev]
160	- 9.64 in ³ /rev [158,00 cm ³ /rev]
200	- 12.28 in ³ /rev [201,30 cm ³ /rev]
235	- 14.33 in ³ /rev [235,00 cm ³ /rev]
250	- 15.37 in ³ /rev [252,00 cm ³ /rev]
300	- 18.30 in ³ /rev [300,00 cm ³ /rev]
315	- 19.21 in ³ /rev [314,90 cm ³ /rev]
350	- 21.21 in ³ /rev [347,80 cm ³ /rev]
370	- 22.51 in ³ /rev [369,00 cm ³ /rev]
400	- 24.20 in ³ /rev [396,80 cm ³ /rev]
470	- 28.71 in ³ /rev [470,60 cm ³ /rev]
500	- 30.65 in ³ /rev [502,40 cm ³ /rev]
535	- 32.70 in ³ /rev [536,00 cm ³ /rev]
550	- 33.55 in ³ /rev [550,00 cm ³ /rev]

Pos.2 - Shaft Extensions*

C	- ø38,1 straight, Parallel key $\frac{3}{8}'' \times \frac{3}{8}'' \times 1\frac{1}{2}''$ BS46
K	- 1 $\frac{1}{16}$ [31,75] straight, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46
KB	- ø35 tapered 1:10, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46
L	- 1 $\frac{1}{4}''$ [31,75] splined 14T, ANSI B92.1-1976
M	- ø32 straight, Parallel key A10x8x32 DIN 6885
R	- 1 $\frac{1}{4}''$ [31,75] Tapered, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46
T	- 1 $\frac{1}{2}''$ [38,1] Tapered, Parallel key $\frac{5}{16}'' \times \frac{5}{16}'' \times 1\frac{1}{4}''$ BS46

Pos.3 - Ports

2	- BSPP (ISO 228)
4	- SAE (ANSI B1.1-1982)

Pos.4 - Special Features [see page 58]
Pos.5 - Design Series

omit - Factory specified

NOTES:

- * The permissible output torque for shafts must not be exceeded!
- ** Color at customer's request.

The hydraulic motors are mangano-phosphatized as standard.

MOTOR SPECIAL FEATURES

Special Feature Description	Order Code	Motor type			
		MLHS	MLHT	MLHV	MLHHW
Speed Sensor*	RS	O	O	O	-
Tacho Connection**	T	O	O	O	-
Reinforced motor	HD	-	O	O	-
Low Leakage	LL	O	O	O	O
Low Speed Valving	LSV	O	O	O	O
Reverse Rotation	R	O	O	O	O
Paint***	P	O	O	O	O
Corrosion Protected Paint***	PC	O	O	O	O
Special Paint****	PS	O	O	O	O
	PCS				
Check Valves		S	S*****	S*****	S

O	Optional
-	Not applicable
S	Standard

* For sensor ordering see pages 59÷60.

** For side ports only!

*** Colour at customer's request.


**** Non painted feeding surfaces, colour at customer's request.

***** Without check valves for "HD" option.


⚠ For more information about HD option please contact with "M+S Hydraulic".

MOTORS WITH SPEED SENSOR


MLHS...RS

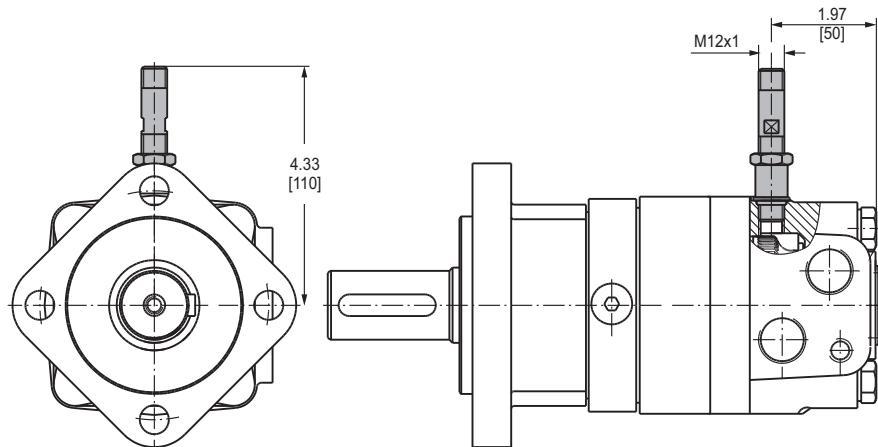

MLHT...RS

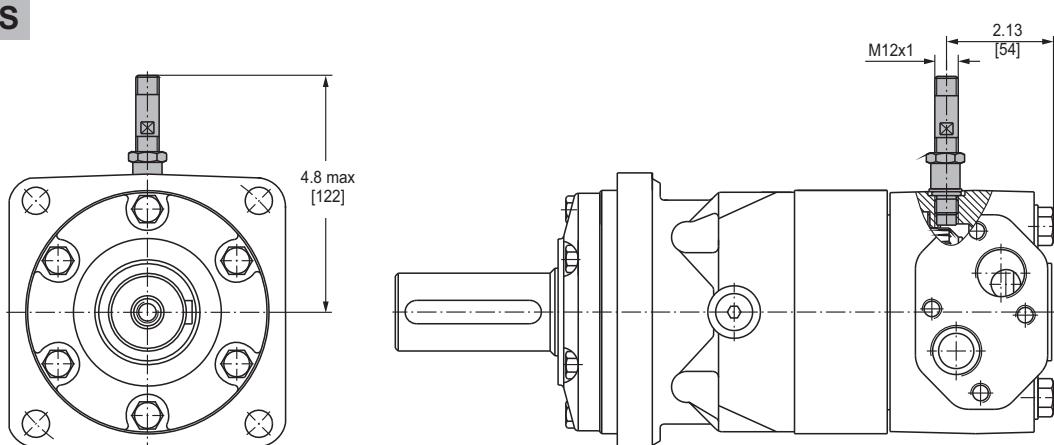


MLHV...RS

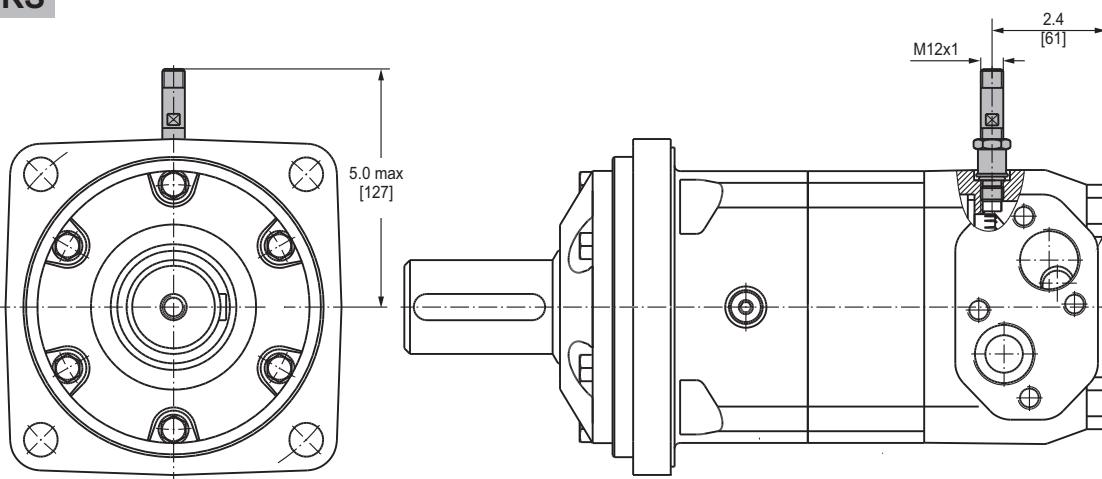


TECHNICAL DATA OF THE SPEED SENSOR

Wiring diagrams

PNP

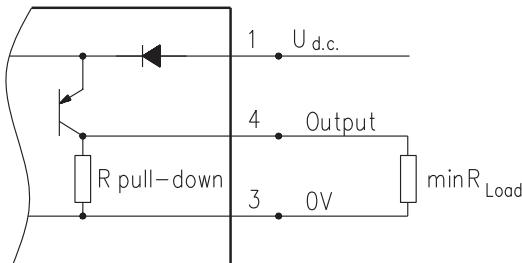


NPN

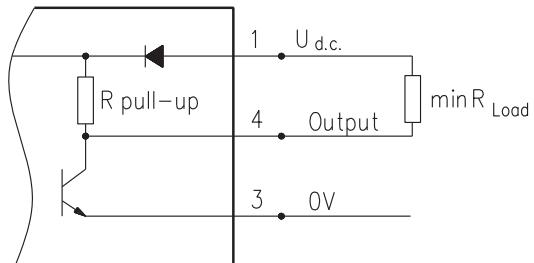

$$R_{\text{Load}} [\text{k}\Omega] = U_{\text{d.c.}} [\text{V}] / I_{\text{max}} [\text{mA}]$$

Motor type	MLHS	MLHT	MLHV
Pulses per revolution	54	84	102

Stick type



Terminal No.	Connection	Cable Output
1	U _{d.c.}	Brown
2	No connection	White
3	0V	Blue
4	Output signal	Black

Order Code for Speed Sensor

Sensor Code	Electric connection
RS	Connector BINDER 713 series
RSL2,5	Cable output 3x0,25; 98 in [2,5 m] long
RSL3,5	Cable output 3x0,25; 138 in [3,5 m] long
RSL5	Cable output 3x0,25; 196 in [5 m] long
RSL10	Cable output 3x0,25; 394 in [10 m] long

NOTE: *- The speed sensor is not fitted at the factory, but is supplied in a plastic bag with the motor.
For installation see enclosed instructions.

APPLICATION CALCULATION

VEHICLE DRIVE CALCULATIONS

1. Motor speed: n, RPM

$$n = \frac{168 \times v_{ml} \times i}{R_{in}} \quad n = \frac{2,65 \times v_{km} \times i}{R_m}$$

v_{km} - vehicle speed, km/h;

v_{ml} - vehicle speed, mile/h;

R_m - wheel rolling radius, m;

R_{in} - wheel rolling radius, in;

i-gear ratio between motor and wheels.

If no gearbox, use $i=1$.

2. Rolling resistance: RR, lbs [daN]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

G- total weight loaded on vehicle, lbs [daN];
 ρ -rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	ρ
Concrete- faultless	0.010
Concrete- good	0.015
Concrete- bad	0.020
Asphalt- faultless	0.012
Asphalt- good	0.017
Asphalt- bad	0.022
Macadam- faultless	0.015
Macadam- good	0.022
Macadam- bad	0.037
Snow- 5 cm	0.025
Snow- 10 cm	0.037
Polluted covering- smooth	0.025
Polluted covering- sandy	0.040
Mud	0.037÷0.150
Sand- Gravel	0.060÷0.150
Sand- loose	0.160÷0.300

3. Grade resistance: GR, lbs [daN]

$$GR = G \times (\sin\alpha + \rho \times \cos\alpha)$$

α - gradient negotiation angle (Table 2)

Table 2

Grade %	α Degrees	Grade %	α Degrees
1%	0° 35'	12%	6° 5'
2%	1° 9'	15%	8° 31'
5%	2° 51'	20%	11° 19'
6%	3° 26'	25%	14° 3'
8%	4° 35'	32%	18°
10%	5° 43'	60%	31°

4. Acceleration force: FA, lbs [daN]

Force FA necessary for acceleration from 0 to maximum speed v and time t can be calculated with a formula:

$$FA = \frac{v_{ml} \times G}{22 \times t}, [\text{lbs}]; \quad FA = \frac{v_{km} \times G}{36 \times t}, [\text{daN}]$$

FA- acceleration force, lbs [daN];
 t - time, [s].

5. Tractive effort: DP, lbs [daN]

Tractive effort DP is the additional force of trailer. This value will be established as follows:

- acc.to constructor's assessment;
- as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

6. Total tractive effort: TE, lbs [daN]

Total tractive effort TE is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

RR - force acquired to overcome the rolling resistance;

GR- force acquired to slope upwards;

FA- force acquired to accelerate (acceleration force);

DP- additional tractive effort (trailer).

7. Motor Torque moment: M, lb-in [daNm]

Necessary torque moment for every hydraulic motor:

$$M = \frac{TE \times R_{in}[R_m]}{N \times i \times \eta_M}$$

N- motor numbers;

η_M -mechanical gear efficiency (if it is available).

8. Cohesion between tire and road covering: M_w , lb-in [daNm]

$$M_w = \frac{G_w \times f \times R_{in}[R_m]}{i \times \eta_M}$$

To avoid wheel slipping, the following condition should be observed $M_w > M$

f - frictional factor;


G_w -total weight over the wheels, lbs [daN].

Table 3

Surface	Frictional factor f
Steel on steel	0.15 ÷ 0.20
Rubber tire on polluted surface	0.5 ÷ 0.7
Rubber tire on asphalt	0.8 ÷ 1.0
Rubber tire on concrete	0.8 ÷ 1.0
Rubber tire on grass	0.4

9. Radial motor loading: P_{rad} , lbs [daN]

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft P_{rad} is a sum of motion force and weight force acting on one wheel.

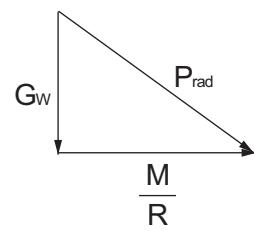

G_w - Weight held by wheel;

P_{rad} - Total radial loading of motor shaft;



M/R - Motion force.

$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

DRAINAGE SPACE AND DRAINAGE PRESSURE

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

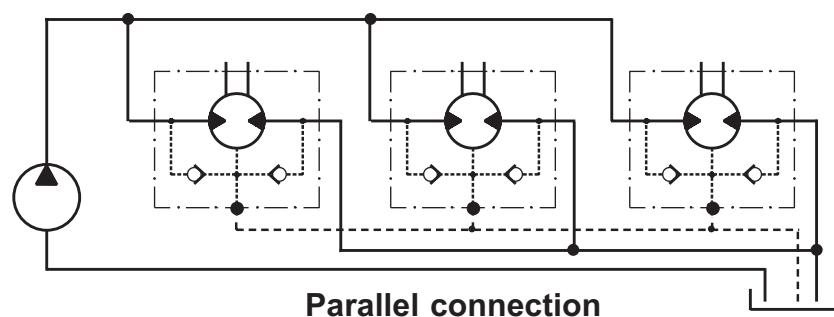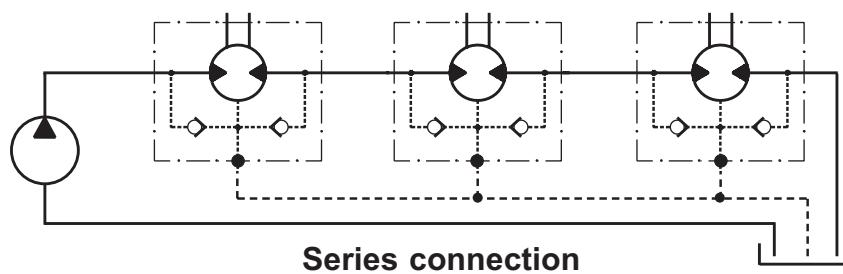

WARRANTY

M+S Hydraulic warrants, that its products, supplied directly to original equipment manufacturer, authorized distributor or other customer, will be free of defects in material or workmanship at the time of shipment from M+S Hydraulic and will conform to the products technical documentation (drawings and specifications) under sale agreement with Buyer.

This warranty will apply only to defects appearing within applicable Warranty period, mentioned below. If Buyer notifies M+S Hydraulic within the Warranty period about any such defects, M+S, at its sole option will replace or repair the defective products or their parts found by M+S Hydraulic to be defective in material or workmanship.

THE FOREGOING LIMITED WARRANTY IS AVAILABLE ONLY IF "M+S HYDRAULIC" IS PROMPTLY NOTIFIED IN WRITTEN OF THE ALLEGED DEFECT AND DOES NOT COVER FAILURE TO FUNCTION CAUSED BY DAMAGE TO THE PRODUCT, IMPROPER INSTALLATION, UNREASONABLE USE OR ABUSE OF THE PRODUCT, FAILURE TO PROVIDE OR USE OF IMPROPER MAINTENANCE OR USUAL, DEGRADATION OF THE PRODUCT DUE TO PHYSICAL ENVIRONMENTS OF AN USUAL NATURE. THE FOREGOING REMEDIES ARE THE SOLE AND EXCLUSIVE REMEDIES AVAILABLE TO CUSTOMER. To facilitate the inspection, M+S Hydraulic may require return of the product/part, which Buyer claims to be defective.

M+S Hydraulic shall not be liable for labor costs or any other expenses incurred during the disassembling or reinstalling of the product/part.

In case the claimed products are returned to M+S Hydraulic in bad condition: dirty, disassembled, with damaged or missing parts during transportation, the warranty will be considered as not applicable and the products will not be liable to repair.

Warranty periods

New products: The Warranty period is limited to 24 consecutive months (2 years) from the date of production of the product.

Repaired products: If the product is repaired in M+S Hydraulic during its warranty period, the warranty period of the repaired item shall continue for the balance of original Warranty period or for a period equal to 50% of the original new product Warranty period, whichever is later.

Spare parts: The Warranty period for Spare parts is 12 consecutive months (1 year) from the dispatch date of such parts from M+S Hydraulic.

LIMITATION OF LIABILITY M+S Hydraulic's liability for claim of any kind, for loss or damage arising out of, connected with or resulting from an order, or from the performance or branch thereof, or from the design, manufacture, sale delivery, operation or use of any of its products shall be limited to, at M+S 's sole option, replacement, repair of any defective product or the issuance of a credit to Customer against any future purchases. Cash refunds will not be made under any circumstances and Customer will not be entitled to recover any damages of any kind against M+S Hydraulic, including but not limited to incidental or consequential damages, whether direct or indirect, known or unknown, foreseen or unforeseen.

